



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 45.1

Huawei RH1288 V2 (Intel Xeon E5-2650 2.0 GHz)

SPECint_base2006 = 41.4

CPU2006 license: 3175


Test date: Jun-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

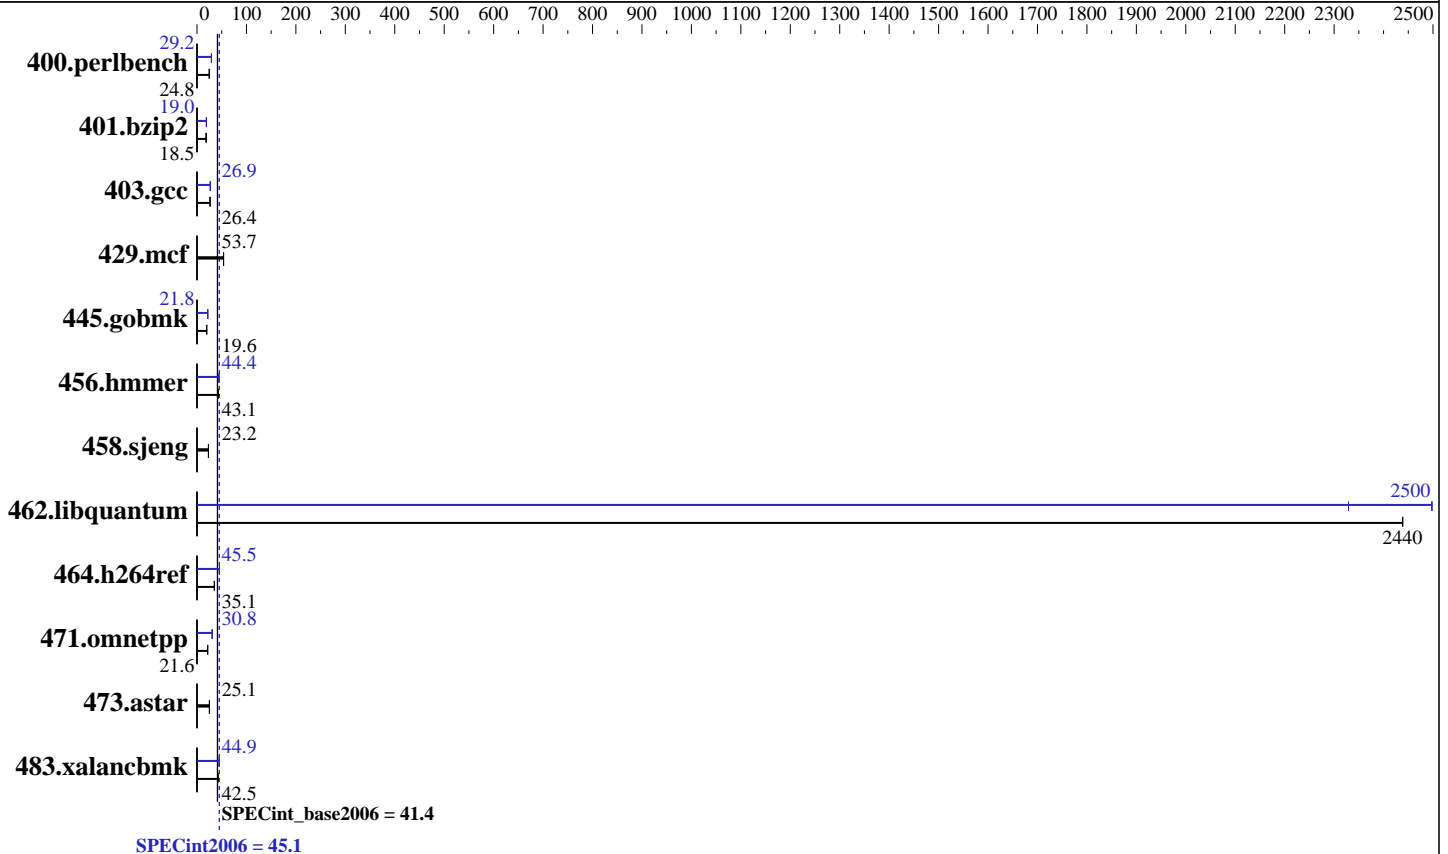

Hardware

CPU Name: Intel Xeon E5-2650
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = **45.1**

Huawei RH1288 V2 (Intel Xeon E5-2650 2.0 GHz)

SPECint_base2006 = **41.4**

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jun-2013
Hardware Availability: May-2012
Software Availability: Feb-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	392	24.9	393	24.8	394	24.8	334	29.2	334	29.2	335	29.2
401.bzip2	521	18.5	522	18.5	521	18.5	508	19.0	508	19.0	508	19.0
403.gcc	304	26.5	305	26.4	305	26.4	299	26.9	299	26.9	299	26.9
429.mcf	170	53.7	170	53.7	170	53.8	170	53.7	170	53.7	170	53.8
445.gobmk	535	19.6	533	19.7	535	19.6	482	21.8	483	21.7	482	21.8
456.hammer	217	43.1	216	43.1	215	43.4	209	44.7	210	44.3	210	44.4
458.sjeng	522	23.2	522	23.2	523	23.1	522	23.2	522	23.2	523	23.1
462.libquantum	8.50	2440	8.50	2440	8.50	2440	8.30	2500	8.29	2500	8.90	2330
464.h264ref	630	35.1	630	35.1	629	35.2	487	45.5	487	45.5	487	45.4
471.omnetpp	289	21.6	289	21.6	291	21.5	204	30.6	203	30.8	203	30.8
473.astar	279	25.2	280	25.1	279	25.1	279	25.2	280	25.1	279	25.1
483.xalancbmk	161	42.8	163	42.4	163	42.5	154	44.8	154	44.9	154	44.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
Select only test related files when installing the operating system

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Baseboard Management Controller used to adjust the fan speed to 100%
Intel Hyper Threading Technology = Disable
Sysinfo program /spec/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost Sat Jun 29 17:07:51 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 45.1

Huawei RH1288 V2 (Intel Xeon E5-2650 2.0 GHz)

SPECint_base2006 = 41.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2013

Hardware Availability: May-2012

Software Availability: Feb-2013

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132117844 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 29 17:06
```

```
SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      193G   81G  103G  45% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 45.1

Huawei RH1288 V2 (Intel Xeon E5-2650 2.0 GHz)

SPECint_base2006 = 41.4

CPU2006 license: 3175

Test date: Jun-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32
445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 45.1

Huawei RH1288 V2 (Intel Xeon E5-2650 2.0 GHz)

SPECint_base2006 = 41.4

CPU2006 license: 3175

Test date: Jun-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias

458.sjeng: basepeak = yes

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
 -auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 45.1

Huawei RH1288 V2 (Intel Xeon E5-2650 2.0 GHz)

SPECint_base2006 = 41.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2013

Hardware Availability: May-2012

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:25:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 July 2013.