



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1710

IBM PowerLinux 7R4 (4.0 GHz, 32 core, RHEL)

SPECint_rate_base2006 = 1240

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2013

Hardware Availability: Aug-2013

Software Availability: Apr-2013

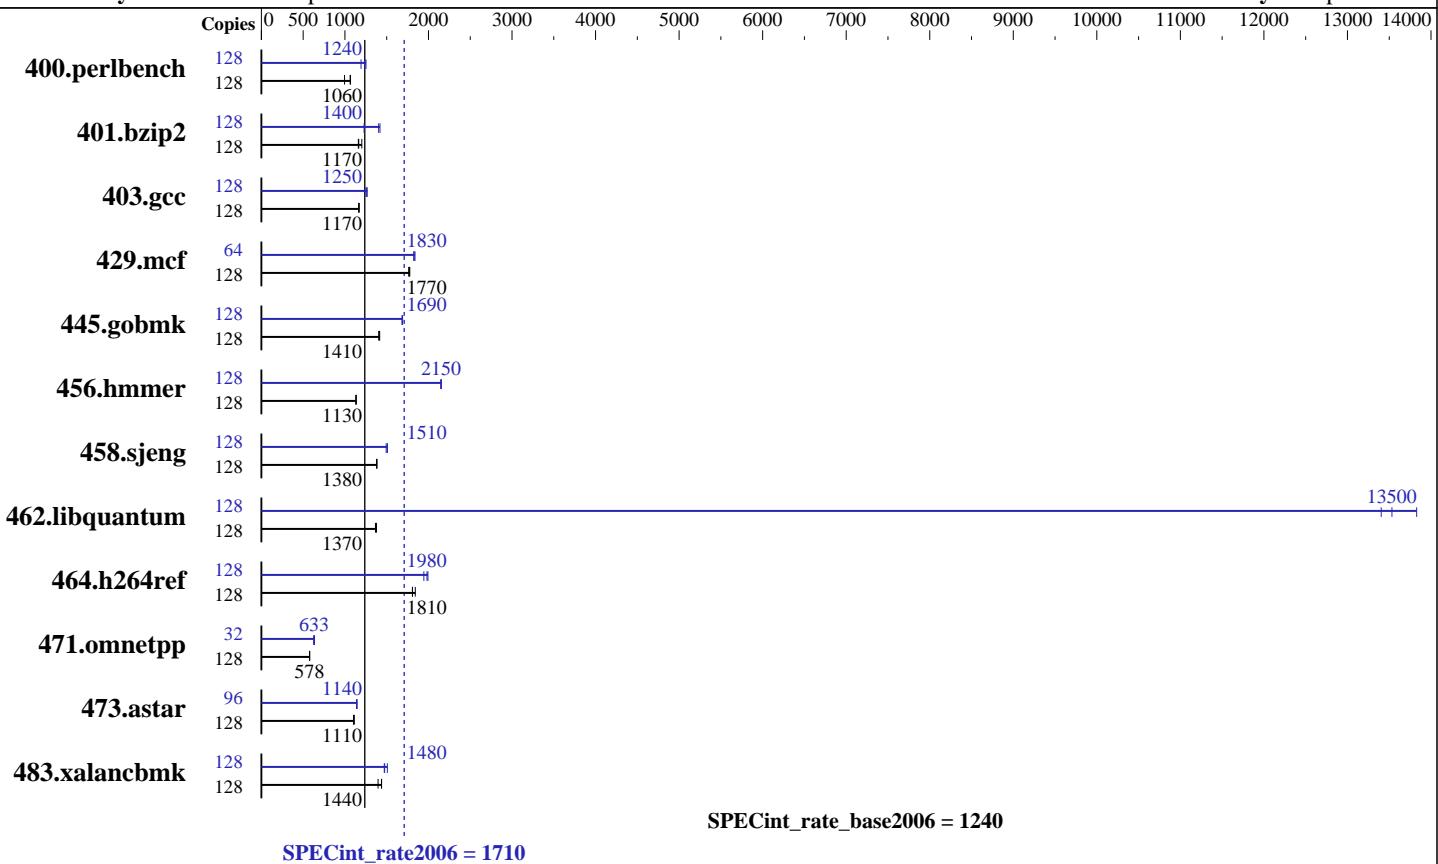

Hardware

CPU Name: POWER7+
CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.431 GHz
CPU MHz: 4060
FPU: Integrated
CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 4 threads/core
CPU(s) orderable: 16, 32 cores
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 10 MB I+D on chip per core
Other Cache: None
Memory: 256 GB (64 x 4 GB) DDR3 1066 MHz
Disk Subsystem: 1 x 300 GB SAS SFF 15K RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (ppc64) kernel 2.6.32-358.6.1.el6.ppc64
Compiler: C/C++: Version 12.1 of IBM XL C/C++ for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: -Post-Link Optimization for Linux on POWER, version 5.6.2-1
-MicroQuill SmartHeap 9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1710

IBM PowerLinux 7R4 (4.0 GHz, 32 core, RHEL)

SPECint_rate_base2006 = 1240

CPU2006 license: 11

Test date: May-2013

Test sponsor: IBM Corporation

Hardware Availability: Aug-2013

Tested by: IBM Corporation

Software Availability: Apr-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1172	1070	1256	995	1177	1060	128	1048	1190	999	1250	1010	1240
401.bzip2	128	1064	1160	1027	1200	1060	1170	128	1005	1230	880	1400	870	1420
403.gcc	128	881	1170	884	1170	883	1170	128	813	1270	821	1250	821	1250
429.mcf	128	657	1780	659	1770	662	1760	64	317	1840	320	1820	319	1830
445.gobmk	128	956	1410	948	1420	952	1410	128	796	1690	794	1690	797	1680
456.hammer	128	1055	1130	1054	1130	1054	1130	128	556	2150	555	2150	555	2150
458.sjeng	128	1120	1380	1121	1380	1123	1380	128	1037	1490	1028	1510	1027	1510
462.libquantum	128	1931	1370	1942	1370	1926	1380	128	192	13800	196	13500	198	13400
464.h264ref	128	1566	1810	1538	1840	1566	1810	128	1421	1990	1457	1940	1429	1980
471.omnetpp	128	1385	578	1389	576	1384	578	32	315	636	320	626	316	633
473.astar	128	815	1100	810	1110	809	1110	96	592	1140	591	1140	588	1150
483.xalancbmk	128	632	1400	614	1440	614	1440	128	599	1480	586	1510	600	1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to April 2013 PTF
Version: 12.01.0000.0003

Peak Tuning Notes

Post-Link optimization tool used for:

```

400.perlbench
    with options -O4 -omullX for optimization phase,
    and -imullX for instrumentation phase
401.bzip2
    with options -O4 -vrox
403.gcc
    with options -O4 -nodp -rtb
429.mcf 445.gobmk 458.sjeng 473.astar
    with options -O3
462.libquantum
    with options -O4 -vrox -nodp
464.h264ref
    with options -O4 -vrox -nodp -rtb
471.omnetpp
    with options -O3 -lu -l -nodp -sdp 9
483.xalancbmk
    with options -O3 -m power7

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM PowerLinux 7R4 (4.0 GHz, 32 core, RHEL)

SPECint_rate2006 = 1710

SPECint_rate_base2006 = 1240

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2013

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "numactl" command (see flags file for details).

Operating System Notes

ulimit -s (stack) set to 1048576.

Large pages reserved as follows by root user:
echo 8448 > /proc/sys/vm/nr_hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_ELFMAP = "RW"
HUGETLB_MORECORE = "yes"
HUGETLB_VERBOSE = "0"
XLF RTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-O5 -qarch=auto -qtune=auto -qipa=threads -qalias=noansi -qallocache -lhugetlbfs

C++ benchmarks:

-O5 -qarch=auto -qtune=auto -qipa=threads -qrtti -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1710

IBM PowerLinux 7R4 (4.0 GHz, 32 core, RHEL)

SPECint_rate_base2006 = 1240

CPU2006 license: 11

Test date: May-2013

Test sponsor: IBM Corporation

Hardware Availability: Aug-2013

Tested by: IBM Corporation

Software Availability: Apr-2013

Base Other Flags

C benchmarks:

C++ benchmarks:

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

x1C

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC

462.libquantum: -DSPEC_CPU_LINUX

464.h264ref: -qchars=signed

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qipa=threads
-qalias=noansi -qipa=level=2 -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto
-qtune=auto -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qipa=threads
-qalloca -lhugetlbfs

429.mcf: -Wl,-q -O5 -qarch=auto -qtune=auto -qipa=threads
-lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qipa=threads
-lhugetlbfs

456.hmmr: -Wl,-q -O5 -qarch=auto -qtune=auto -qipa=threads -qsimd
-qassert=refalign -qipa=inline=threshold=2888
-qipa=inline=limit=11880 -lhugetlbfs

458.sjeng: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=auto
-qtune=auto -qipa=threads -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1710

IBM PowerLinux 7R4 (4.0 GHz, 32 core, RHEL)

SPECint_rate_base2006 = 1240

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2013

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=auto
-qtune=auto -qipa=threads -q64 -lhugetlbfs

464.h264ref: Same as 458.sjeng

C++ benchmarks:

471.omnetpp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=auto
-qtune=auto -qipa=threads -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qipa=threads
-lhugetlbfs -lsmartheap

483.xalancbmk: -Wl,-q -O4 -qipa=threads -qipa=partition=large
-lsmartheap

Peak Other Flags

C benchmarks:

C++ benchmarks:

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Power.html>

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20121024.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-Power.xml>

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20121024.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:18:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 August 2013.