



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 1720

### IBM Flex System p460 (4.1 GHz, 32 core)

SPECint\_rate\_base2006 = 1230

CPU2006 license: 11


Test date: Jul-2013

Test sponsor: IBM Corporation

Hardware Availability: Sep-2013

Tested by: IBM Corporation

Software Availability: Aug-2013

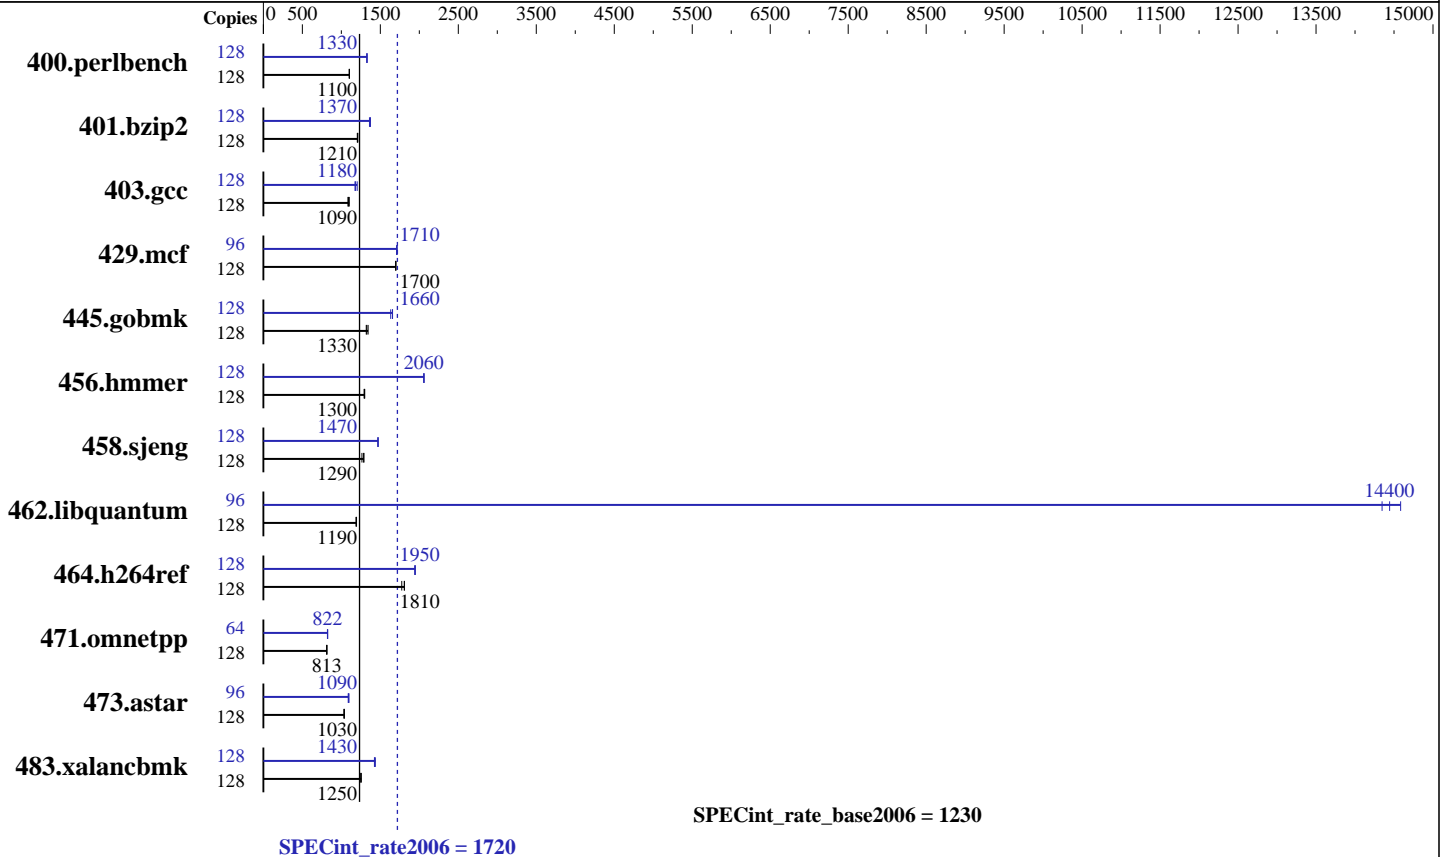

### Hardware

CPU Name: POWER7+

CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.340 GHz

CPU MHz: 4116

FPU: Integrated

CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core

CPU(s) orderable: 32 cores

Primary Cache: 32 KB I + 32 KB D on chip per core

Secondary Cache: 256 KB I+D on chip per core

L3 Cache: 10 MB I+D on chip per core

Other Cache: None

Memory: 256 GB (32 x 8 GB) DDR3 1066 MHz

Disk Subsystem: 2 x 177 GB Raid0 SATA SSD 1.8"

Other Hardware: None

### Software

Operating System: IBM AIX V7.1

Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX

Auto Parallel: No

File System: AIX/JFS2

System State: Multi-user

Base Pointers: 32-bit

Peak Pointers: 32/64-bit

Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1720

IBM Flex System p460 (4.1 GHz, 32 core)

SPECint\_rate\_base2006 = 1230

CPU2006 license: 11

Test date: Jul-2013

Test sponsor: IBM Corporation

Hardware Availability: Sep-2013

Tested by: IBM Corporation

Software Availability: Aug-2013

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1136	1100	1132	1100	<u>1134</u>	<u>1100</u>	128	943	1330	940	1330	<u>942</u>	<u>1330</u>
401.bzip2	128	1019	1210	<u>1024</u>	<u>1210</u>	1025	1210	128	908	1360	<u>901</u>	<u>1370</u>	900	1370
403.gcc	128	950	1080	935	1100	<u>944</u>	<u>1090</u>	128	856	1200	877	1180	<u>871</u>	<u>1180</u>
429.mcf	128	687	1700	688	1700	<u>688</u>	<u>1700</u>	96	512	1710	<u>512</u>	<u>1710</u>	510	1720
445.gobmk	128	1000	1340	1018	1320	<u>1012</u>	<u>1330</u>	128	822	1630	<u>811</u>	<u>1660</u>	811	1660
456.hammer	128	920	1300	<u>920</u>	<u>1300</u>	925	1290	128	<u>580</u>	<u>2060</u>	580	2060	581	2060
458.sjeng	128	<u>1205</u>	<u>1290</u>	1201	1290	1225	1260	128	1055	1470	<u>1053</u>	<u>1470</u>	1053	1470
462.libquantum	128	2220	1190	2229	1190	<u>2228</u>	<u>1190</u>	96	139	14300	<u>138</u>	<u>14400</u>	136	14600
464.h264ref	128	1566	1810	1596	1770	<u>1567</u>	<u>1810</u>	128	1459	1940	1454	1950	<u>1455</u>	<u>1950</u>
471.omnetpp	128	<u>984</u>	<u>813</u>	983	814	984	813	64	487	822	484	826	<u>487</u>	<u>822</u>
473.astar	128	865	1040	869	1030	<u>868</u>	<u>1030</u>	96	<u>617</u>	<u>1090</u>	614	1100	619	1090
483.xalanbmk	128	711	1240	<u>706</u>	<u>1250</u>	703	1260	128	<u>619</u>	<u>1430</u>	620	1420	615	1440

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

C/C++ compiler updated to June 2013 PTF  
Version: 12.01.0000.0004

## Peak Tuning Notes

```

400.perlbench fdpr options: -O4 -cbpth -1 -sdp -1
401.bzip2 fdpr options: -O4 -vrox -nobldcg -sdp -1
403.gcc fdpr options: -O4 -cbpth -1 -sdp -1
429.mcf fdpr options: -O3
445.gobmk fdpr options: -O3
456.hammer fdpr options: -O4 -nodp
458.sjeng fdpr options: -O3
464.h264ref fdpr options: -O4 -sdp -1 -vrox -lu -1
473.astar fdpr options: -O3 -vrox -bldcg
483.xalanbmk fdpr options: -O3

```

## Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1720

IBM Flex System p460 (4.1 GHz, 32 core)

SPECint\_rate\_base2006 = 1230

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

## Operating System Notes

AIX updated to V7.1 TL 2 SP3

All ulimits set to unlimited.

12800 16M large pages defined with vmo command

## Platform Notes

This Compute Node is housed in an  
"IBM Flex System Enterprise Chassis"

## General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY\_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

## Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_AIX

## Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvoll  
-D\_ILS\_MACROS -qalias=noansi -qalloca -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -D\_ILS\_MACROS  
-qrtti=all -D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -qprefetch=dscr=0x42 -blpdata



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1720

IBM Flex System p460 (4.1 GHz, 32 core)

SPECint\_rate\_base2006 = 1230

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

## Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

## Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_AIX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2  
-qarch=auto -qtune=auto -D\_ILS\_MACROS -qalias=noansi  
-blpdata -btextpsize:64K  
401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage  
-D\_ILS\_MACROS -blpdata -btextpsize:64K  
403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qlargepage -D\_ILS\_MACROS -qalloca  
-blpdata -btextpsize:64K  
429.mcf: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage  
-D\_ILS\_MACROS -blpdata -btextpsize:64K  
445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D\_ILS\_MACROS -blpdata -btextpsize:64K

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1720

IBM Flex System p460 (4.1 GHz, 32 core)

SPECint\_rate\_base2006 = 1230

CPU2006 license: 11

Test date: Jul-2013

Test sponsor: IBM Corporation

Hardware Availability: Sep-2013

Tested by: IBM Corporation

Software Availability: Aug-2013

## Peak Optimization Flags (Continued)

456.hmmr: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign  
-qipa=inline=threshold=2888 -qipa=inline=limit=11880  
-D\_ILS\_MACROS -blpdata -btextpsize:64K

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4  
-D\_ILS\_MACROS -blpdata -btextpsize:64K

462.libquantum: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64  
-qlargepage -D\_ILS\_MACROS -blpdata -btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd  
-qvecnvol -D\_ILS\_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O4 -qsimd -qvecnvol -qprefetch=dscr=0x42  
-D\_ILS\_MACROS -qalign=natural -qrtti=all -qinlglue  
-D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qlargepage -qprefetch=dscr=0x42  
-D\_ILS\_MACROS -qinlglue -qalign=natural -blpdata  
-btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O4 -qlargepage -qipa=partition=large  
-D\_ILS\_MACROS -qinlglue -D\_\_IBM\_FAST\_VECTOR -blpdata  
-btextpsize:64K

## Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

400.perlbenc: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20130828.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20130828.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20130828.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20130828.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1720

IBM Flex System p460 (4.1 GHz, 32 core)

SPECint\_rate\_base2006 = 1230

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2013

Hardware Availability: Sep-2013

Software Availability: Aug-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:46:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 August 2013.