



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

SPECfp[®]_rate2006 = 232

GigaByte x79-UP4 motherboard (Intel Core i7-4960X)

SPECfp_rate_base2006 = 229

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

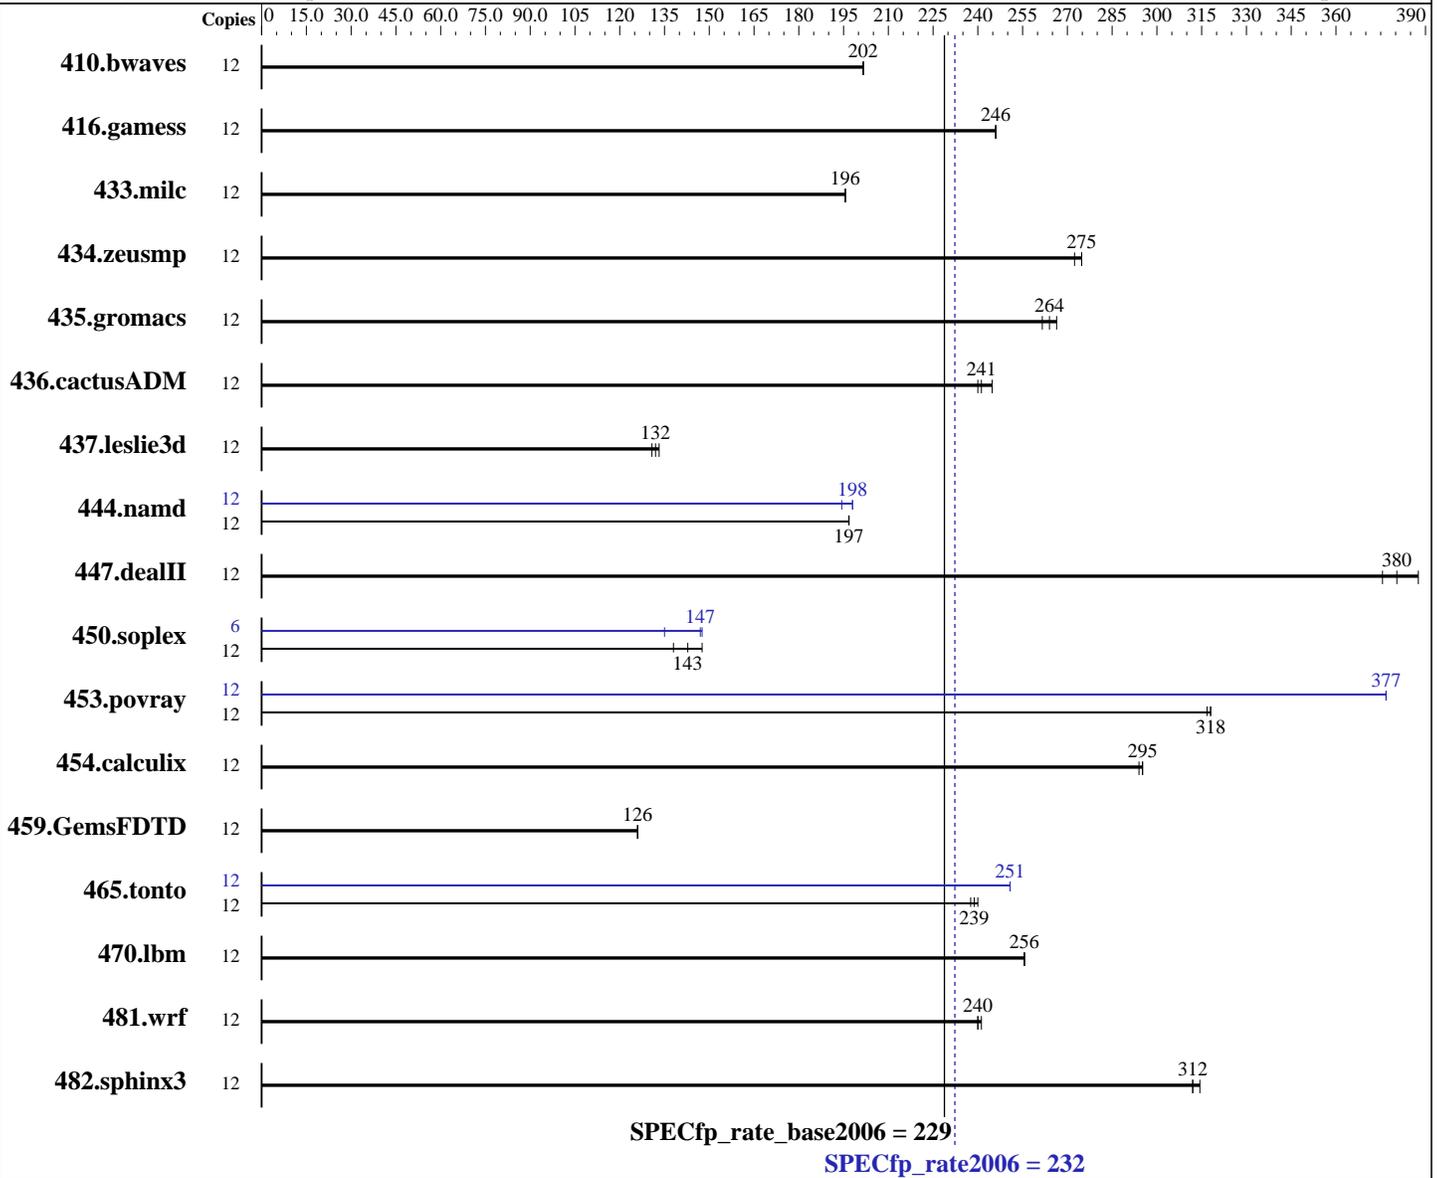

Hardware

CPU Name: Intel Core i7-4960X
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 8 Pro
 6.2.9200 N/A Build 9200
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
 Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 232

GigaByte x79-UP4 motherboard (Intel Core i7-4960X)

SPECfp_rate_base2006 = 229

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	810	202	810	202	808	202	12	810	202	810	202	808	202
416.gamess	12	956	246	956	246	956	246	12	956	246	956	246	956	246
433.milc	12	565	196	562	196	562	196	12	565	196	562	196	562	196
434.zeusmp	12	397	275	401	272	398	275	12	397	275	401	272	398	275
435.gromacs	12	328	262	321	266	324	264	12	328	262	321	266	324	264
436.cactusADM	12	597	240	594	241	586	245	12	597	240	594	241	586	245
437.leslie3d	12	857	132	847	133	859	131	12	857	132	847	133	859	131
444.namd	12	490	197	489	197	489	197	12	487	198	486	198	494	194
447.dealII	12	365	376	355	388	361	380	12	365	376	355	388	361	380
450.soplex	12	727	138	678	148	701	143	6	370	135	340	147	339	148
453.povray	12	201	318	201	317	201	318	12	169	377	169	377	169	377
454.calculix	12	336	295	336	294	336	295	12	336	295	336	294	336	295
459.GemsFDTD	12	1013	126	1012	126	1012	126	12	1013	126	1012	126	1012	126
465.tonto	12	494	239	496	238	492	240	12	471	251	470	251	471	251
470.lbm	12	646	256	646	256	646	256	12	646	256	646	256	646	256
481.wrf	12	556	241	558	240	559	240	12	556	241	558	240	559	240
482.sphinx3	12	748	312	749	312	743	314	12	748	312	749	312	743	314

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 232

GigaByte x79-UP4 motherboard (Intel Core i7-4960X)

SPECfp_rate_base2006 = 229

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

Platform Notes

Sysinfo program C:\Users\PECA_W~1\Desktop\CPU200~1.APR/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 # \$ \8787f7622badcf24e01c368b1db4377c
running on Clt38607738DA9E Sun Aug 4 10:32:44 2013

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8 Pro
OS Version : 6.2.9200 N/A Build 9200
System Manufacturer: Gigabyte Technology Co., Ltd.
System Model : To be filled by O.E.M.
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 62 Stepping 4 GenuineIntel ~3601 Mhz
BIOS Version : American Megatrends Inc. F4, 7/1/2013
Total Physical Memory: 16,307 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 256
L3CacheSize : 15360
MaxClockSpeed : 3601
Name : Intel(R) Core(TM) i7-4960X CPU @ 3.60GHz
NumberOfCores : 6
NumberOfLogicalProcessors: 12

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 232

GigaByte x79-UP4 motherboard (Intel Core i7-4960X)

SPECfp_rate_base2006 = 229

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.

(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 232

GigaByte x79-UP4 motherboard (Intel Core i7-4960X)

SPECfp_rate_base2006 = 229

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2013

Hardware Availability: Sep-2013

Software Availability: Apr-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Gigabyte Technology Co., Ltd.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 232

GigaByte x79-UP4 motherboard (Intel Core i7-4960X)

SPECfp_rate_base2006 = 229

CPU2006 license: 13

Test date: Aug-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 5 11:40:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 September 2013.