



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380e Gen8  
(1.90 GHz, Intel Xeon E5-2420)

**SPECint\_rate2006 = 370**

**SPECint\_rate\_base2006 = 357**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Aug-2013

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2013

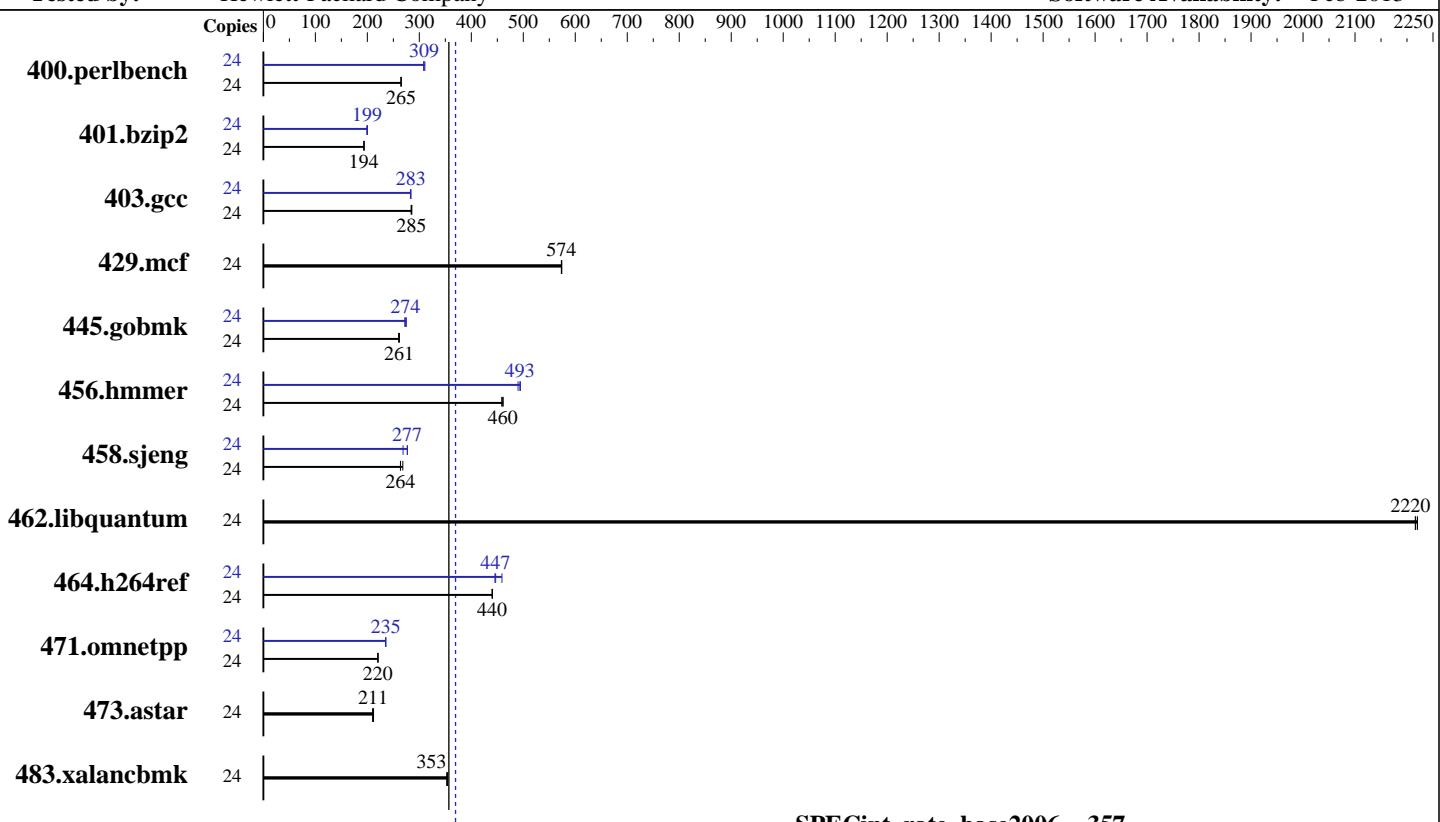

**SPECint\_rate\_base2006 = 357**

### Hardware

CPU Name: Intel Xeon E5-2420  
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
CPU MHz: 1900  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 2 x 300 GB 15 K SAS, RAID 1  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago) 2.6.32-358.el6.x86\_64  
Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380e Gen8  
(1.90 GHz, Intel Xeon E5-2420)

**SPECint\_rate2006 = 370**

**SPECint\_rate\_base2006 = 357**

CPU2006 license: 3

Test date: Aug-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	886	265	<b>885</b>	<b>265</b>	885	265	24	760	308	<b>759</b>	<b>309</b>	755	311
401.bzip2	24	1198	193	<b>1197</b>	<b>194</b>	1195	194	24	<b>1162</b>	<b>199</b>	1162	199	1156	200
403.gcc	24	677	286	680	284	<b>678</b>	<b>285</b>	24	681	284	<b>682</b>	<b>283</b>	683	283
429.mcf	24	<b>382</b>	<b>574</b>	382	573	381	574	24	<b>382</b>	<b>574</b>	382	573	381	574
445.gobmk	24	962	262	<b>965</b>	<b>261</b>	967	260	24	926	272	916	275	<b>920</b>	<b>274</b>
456.hammer	24	486	461	<b>486</b>	<b>460</b>	488	458	24	453	495	457	490	<b>454</b>	<b>493</b>
458.sjeng	24	1083	268	1101	264	<b>1101</b>	<b>264</b>	24	<b>1049</b>	<b>277</b>	1081	269	1048	277
462.libquantum	24	224	2220	<b>224</b>	<b>2220</b>	224	2220	24	224	2220	<b>224</b>	<b>2220</b>	224	2220
464.h264ref	24	<b>1207</b>	<b>440</b>	1207	440	1205	441	24	1157	459	<b>1189</b>	<b>447</b>	1192	445
471.omnetpp	24	681	220	<b>681</b>	<b>220</b>	680	220	24	637	235	<b>637</b>	<b>235</b>	638	235
473.astar	24	<b>799</b>	<b>211</b>	795	212	802	210	24	<b>799</b>	<b>211</b>	795	212	802	210
483.xalancbmk	24	467	354	469	353	<b>468</b>	<b>353</b>	24	467	354	469	353	<b>468</b>	<b>353</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Drive Write Cache set to Enabled in HP Array Configuration Utility,  
CLI version  
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write  
in HP Array Configuration Utility, CLI version 9.0-16.0

## Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance  
Collaborative Power Control set to Disabled  
Dynamic Power Capping Functionality set to Disabled  
DIMM Voltage Preference set to Optimized for Performance  
Memory Power Savings Mode set to Maximum Performance  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380e Gen8  
(1.90 GHz, Intel Xeon E5-2420)

**SPECint\_rate2006 = 370**

**SPECint\_rate\_base2006 = 357**

**CPU2006 license:** 3

**Test date:** Aug-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## Platform Notes (Continued)

HP Smart Array B120i RAID Controller set to Disabled  
Thermal Configuration set to Maximum Cooling  
Power-On Logo set to Disabled

```
Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on dl380eGen8-rfp Thu Aug 8 15:09:28 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2420 0 @ 1.90GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 6
        siblings   : 12
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      98894732 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux dl380eGen8-rfp 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 8 15:06
```

```
SPEC is set to: /cpu2006
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/sda3        ext4    273G   75G  185G  29%  /
```

Additional information from dmidecode:

BIOS HP P73 06/01/2013

Memory:

12x HP 689911-071 8 GB 1333 MHz 2 rank

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380e Gen8  
(1.90 GHz, Intel Xeon E5-2420)

**SPECint\_rate2006 = 370**

**SPECint\_rate\_base2006 = 357**

**CPU2006 license:** 3

**Test date:** Aug-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006/libc2/32:/cpu2006/libc2/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380e Gen8  
(1.90 GHz, Intel Xeon E5-2420)

**SPECint\_rate2006 = 370**

**SPECint\_rate\_base2006 = 357**

**CPU2006 license:** 3

**Test date:** Aug-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380e Gen8  
(1.90 GHz, Intel Xeon E5-2420)

**SPECint\_rate2006 = 370**

**SPECint\_rate\_base2006 = 357**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2013

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:04:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2013.