



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1090**

Huawei E9000 CH240 (Intel Xeon E5-4640)

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 3175


**Test date:** Sep-2013

**Test sponsor:** Huawei

**Hardware Availability:** Apr-2012

**Tested by:** Huawei

**Software Availability:** Sep-2013

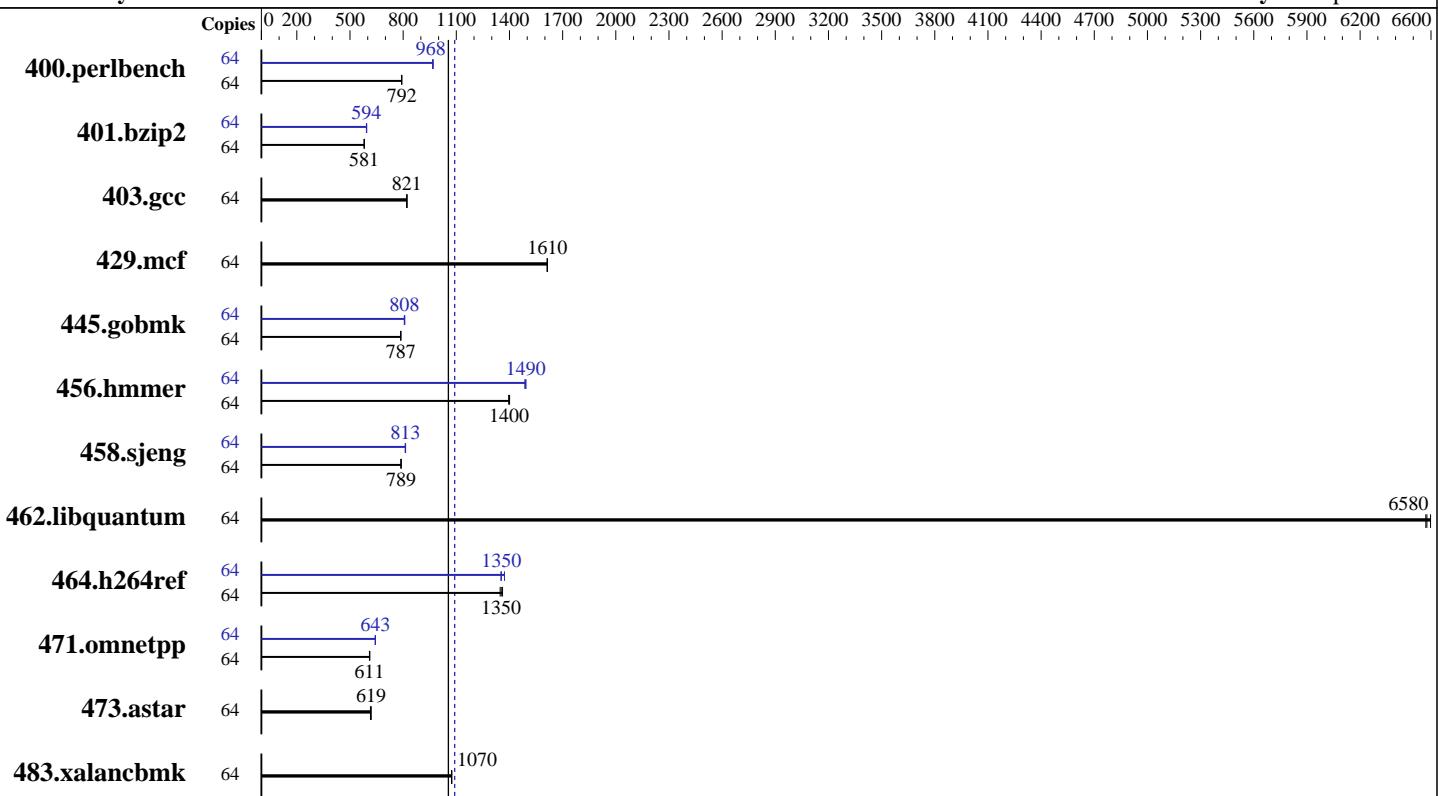

**SPECint\_rate\_base2006 = 1060**

**SPECint\_rate2006 = 1090**

## Hardware

CPU Name: Intel Xeon E5-4640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-13, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: 2.6.32-358.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1090**

Huawei E9000 CH240 (Intel Xeon E5-4640)

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 3175

Test date: Sep-2013

Test sponsor: Huawei

Hardware Availability: Apr-2012

Tested by: Huawei

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	789	793	790	791	<b>790</b>	<b>792</b>	64	647	966	645	969	<b>646</b>	<b>968</b>
401.bzip2	64	1065	580	1064	581	<b>1064</b>	<b>581</b>	64	1042	593	<b>1041</b>	<b>594</b>	1039	594
403.gcc	64	627	822	628	820	<b>627</b>	<b>821</b>	64	627	822	628	820	<b>627</b>	<b>821</b>
429.mcf	64	362	1610	<b>362</b>	<b>1610</b>	362	1610	64	362	1610	<b>362</b>	<b>1610</b>	362	1610
445.gobmk	64	854	786	853	787	<b>854</b>	<b>787</b>	64	830	809	832	806	<b>831</b>	<b>808</b>
456.hmmer	64	428	1400	<b>427</b>	<b>1400</b>	426	1400	64	<b>400</b>	<b>1490</b>	402	1490	400	1490
458.sjeng	64	982	789	984	787	<b>982</b>	<b>789</b>	64	951	814	954	812	<b>953</b>	<b>813</b>
462.libquantum	64	<b>202</b>	<b>6580</b>	201	6600	202	6570	64	<b>202</b>	<b>6580</b>	201	6600	202	6570
464.h264ref	64	<b>1046</b>	<b>1350</b>	1041	1360	1051	1350	64	1048	1350	<b>1046</b>	<b>1350</b>	1033	1370
471.omnetpp	64	656	610	<b>655</b>	<b>611</b>	654	612	64	622	643	622	643	<b>622</b>	<b>643</b>
473.astar	64	726	619	730	615	<b>726</b>	<b>619</b>	64	726	619	730	615	<b>726</b>	<b>619</b>
483.xalancbmk	64	<b>411</b>	<b>1070</b>	412	1070	411	1070	64	<b>411</b>	<b>1070</b>	412	1070	411	1070

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Set Power Efficiency Mode to Performance (Default = custom)

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on speccpuch240 Fri Sep 27 07:55:58 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-4640 0 @ 2.40GHz
        4 "physical id"s (chips)
        64 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1090

Huawei E9000 CH240 (Intel Xeon E5-4640)

SPECint\_rate\_base2006 = 1060

CPU2006 license: 3175

Test date: Sep-2013

Test sponsor: Huawei

Hardware Availability: Apr-2012

Tested by: Huawei

Software Availability: Sep-2013

## Platform Notes (Continued)

```
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264493568 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux speccpuch240 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 27 07:25

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  241G  8.6G  220G   4%  /

Additional information from dmidecode:
BIOS Insyde Corp. OARYV029 03/18/2013
Memory:
 30x Hynix HMT41GR7MFR8C-PB 8 GB 1600 MHz
 1x Micron 3&JSF1G72PZ-1G6K1 8 GB 1600 MHz
 1x Micron 36JSF1G72PZ-1G6K1 8 GB 1600 MHz
16x NO DIMM NO DIMM

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1090**

Huawei E9000 CH240 (Intel Xeon E5-4640)

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 3175

Test date: Sep-2013

Test sponsor: Huawei

Hardware Availability: Apr-2012

Tested by: Huawei

Software Availability: Sep-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1090**

Huawei E9000 CH240 (Intel Xeon E5-4640)

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 3175

Test date: Sep-2013

Test sponsor: Huawei

Hardware Availability: Apr-2012

Tested by: Huawei

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1090

Huawei E9000 CH240 (Intel Xeon E5-4640)

SPECint\_rate\_base2006 = 1060

CPU2006 license: 3175

Test date: Sep-2013

Test sponsor: Huawei

Hardware Availability: Apr-2012

Tested by: Huawei

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:36:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 October 2013.