



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp®\_rate2006 = 466**

**SPECfp\_rate\_base2006 = 456**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

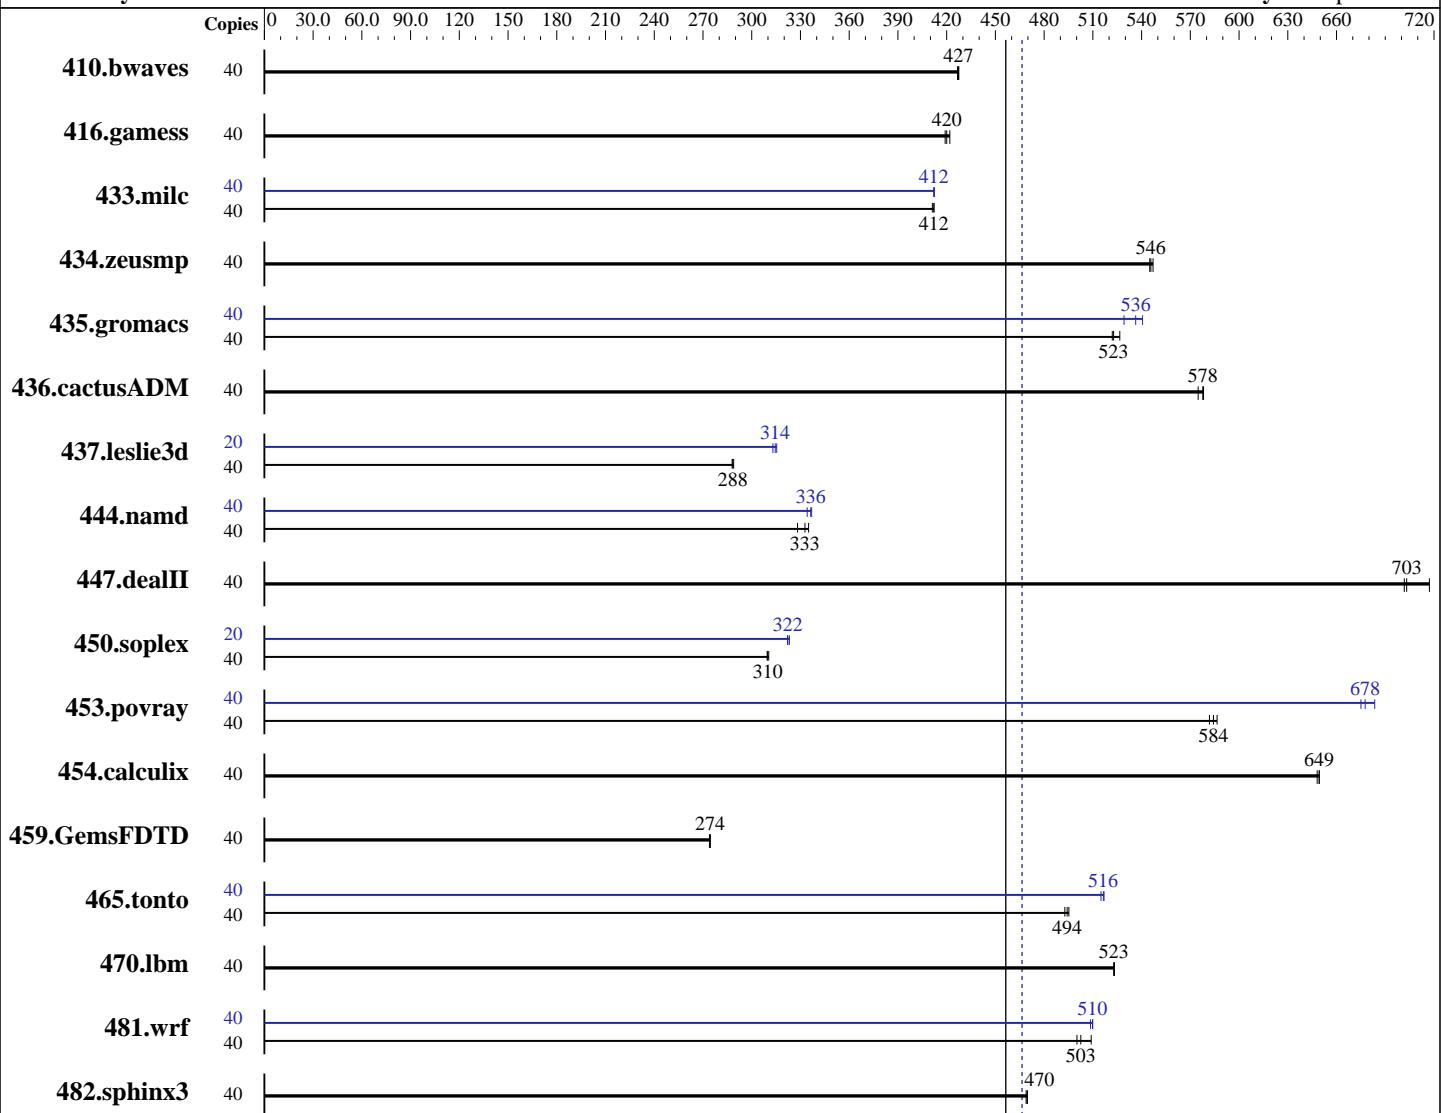

**SPECfp\_rate\_base2006 = 456**

**SPECfp\_rate2006 = 466**

## Hardware

CPU Name: Intel Xeon E5-2650L v2  
CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
CPU MHz: 1700  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86\_64)  
3.0.76-0.11-default  
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran  
Studio XE for Linux  
Auto Parallel: No  
File System: ext2  
System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 466**

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate\_base2006 = 456**

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem:	1 x 300 GB 15000 RPM SAS
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	<u>1272</u>	<u>427</u>	1274	427	1272	428	40	<u>1272</u>	<u>427</u>	1274	427	1272	428		
416.gamess	40	1856	422	<u>1865</u>	<u>420</u>	1869	419	40	1856	422	<u>1865</u>	<u>420</u>	1869	419		
433.milc	40	893	411	<u>891</u>	<u>412</u>	891	412	40	891	412	890	412	<u>891</u>	<u>412</u>		
434.zeusmp	40	665	547	<u>667</u>	<u>546</u>	668	545	40	665	547	<u>667</u>	<u>546</u>	668	545		
435.gromacs	40	547	522	542	527	<u>546</u>	<u>523</u>	40	528	541	<u>532</u>	<u>536</u>	540	529		
436.cactusADM	40	827	578	<u>827</u>	<u>578</u>	832	575	40	827	578	<u>827</u>	<u>578</u>	832	575		
437.leslie3d	40	1306	288	<u>1304</u>	<u>288</u>	1302	289	20	601	313	<u>598</u>	<u>314</u>	596	315		
444.namd	40	<u>964</u>	<u>333</u>	977	328	958	335	40	960	334	<u>954</u>	<u>336</u>	952	337		
447.dealII	40	638	717	<u>651</u>	<u>703</u>	652	702	40	638	717	<u>651</u>	<u>703</u>	652	702		
450.soplex	40	1075	310	<u>1077</u>	<u>310</u>	1078	310	20	518	322	<u>518</u>	<u>322</u>	516	323		
453.povray	40	363	586	<u>364</u>	<u>584</u>	366	582	40	315	675	311	684	<u>314</u>	<u>678</u>		
454.calculix	40	<u>508</u>	<u>649</u>	508	649	509	648	40	<u>508</u>	<u>649</u>	508	649	509	648		
459.GemsFDTD	40	1546	274	1549	274	<u>1547</u>	<u>274</u>	40	1546	274	1549	274	<u>1547</u>	<u>274</u>		
465.tonto	40	795	495	799	493	<u>796</u>	<u>494</u>	40	<u>762</u>	<u>516</u>	761	517	764	515		
470.lbm	40	1050	523	1051	523	<u>1051</u>	<u>523</u>	40	1050	523	1051	523	<u>1051</u>	<u>523</u>		
481.wrf	40	878	509	893	500	<u>889</u>	<u>503</u>	40	<u>876</u>	<u>510</u>	876	510	879	509		
482.sphinx3	40	1663	469	<u>1660</u>	<u>470</u>	1660	470	40	1663	469	<u>1660</u>	<u>470</u>	1660	470		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 466**

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate\_base2006 = 456**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Platform Notes

```
BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled  
Logical Processor enabled  
System Profile set to Performance  
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818  
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191  
running on linux Wed Sep 4 04:09:39 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz  
      2 "physical id"s (chips)  
      40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
      cpu cores : 10  
      siblings : 20  
      physical 0: cores 0 1 2 3 4 8 9 10 11 12  
      physical 1: cores 0 1 2 3 4 8 9 10 11 12  
cache size : 25600 KB
```

```
From /proc/meminfo  
MemTotal:       264601764 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*  
SuSE-release:  
  SUSE Linux Enterprise Server 11 (x86_64)  
  VERSION = 11  
  PATCHLEVEL = 3
```

```
uname -a:  
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 3 10:56 last=S
```

```
SPEC is set to: /root/cpu2006.1.2.ic13  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2       ext2   267G   47G   219G  18% /
```

Additional information from dmidecode:

BIOS Dell Inc. 2.0.19 08/30/2013

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 466**

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate\_base2006 = 456**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

Memory:

```
2x 00AD00B300AD HMT42GR7MFR4C-RD 16 GB 1600 MHz
12x 00AD04B300AD HMT42GR7AFR4C-RD 16 GB 1600 MHz
2x 00CE00B300CE M393B2G70CB0-CMA 16 GB 1600 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 466**

**SPECfp\_rate\_base2006 = 456**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 466**

**SPECfp\_rate\_base2006 = 456**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -static -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 466**

PowerEdge T620 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate\_base2006 = 456**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

```
410.bwaves: basepeak = yes  
416.gamess: basepeak = yes  
434.zeusmp: basepeak = yes  
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch  
459.GemsFDTD: basepeak = yes  
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
           -inline-calloc -opt-malloc-options=3  
  
Benchmarks using both Fortran and C:  
  
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
             -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
             -prof-use(pass 2) -opt-prefetch -static -auto-ilp32  
436.cactusADM: basepeak = yes  
454.calculix: basepeak = yes  
481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 18:42:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 October 2013.