



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 461

Express5800/R120e-1M (Intel Xeon E5-2630L v2)

SPECint_rate_base2006 = 442

CPU2006 license: 9006


Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

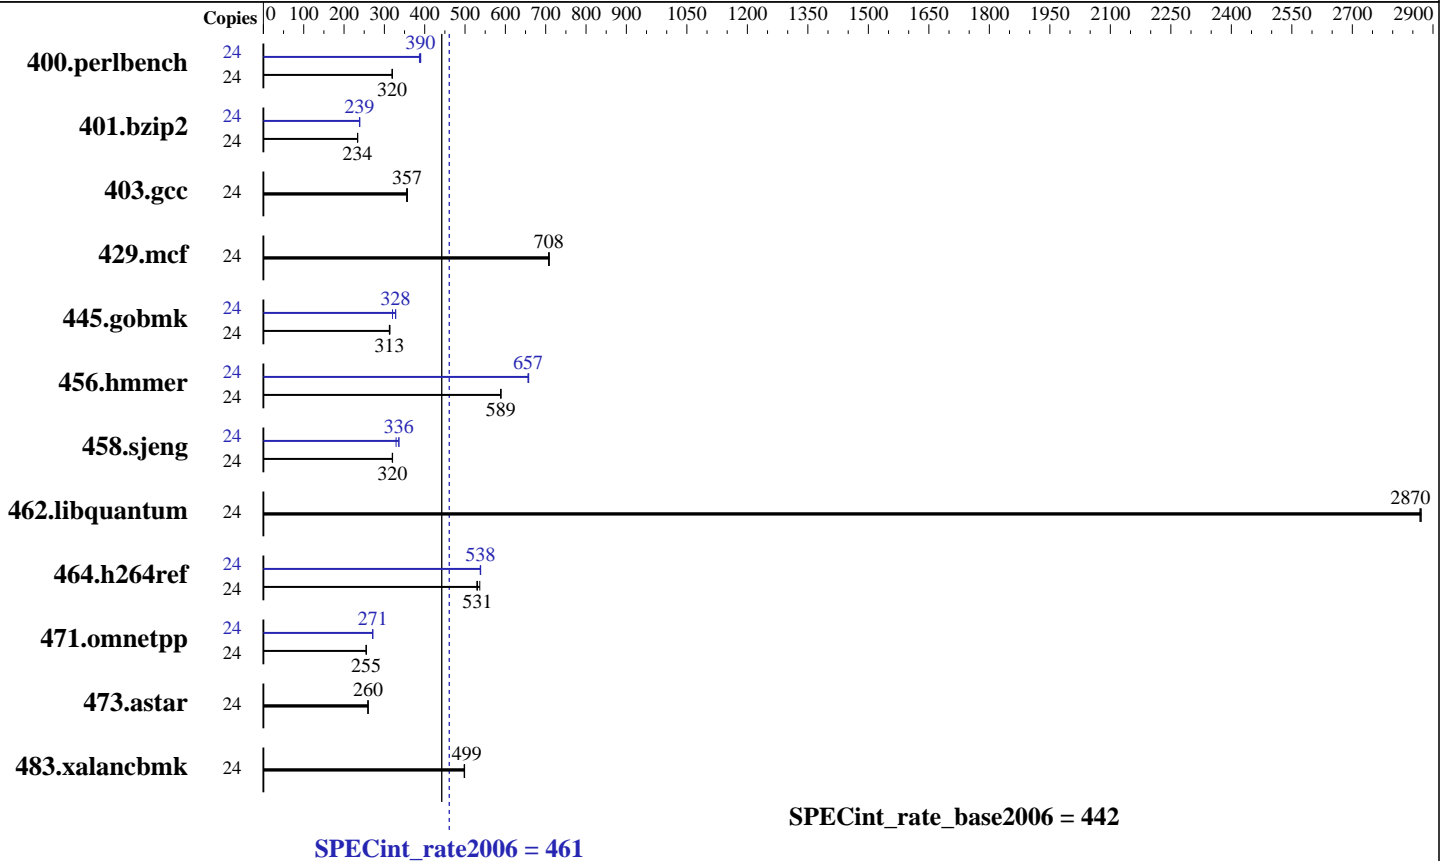

Hardware

CPU Name: Intel Xeon E5-2630L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.18.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 461

Express5800/R120e-1M (Intel Xeon E5-2630L v2)

SPECint_rate_base2006 = 442

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	735	319	<u>734</u>	<u>320</u>	733	320	24	601	390	<u>602</u>	<u>390</u>	606	387
401.bzip2	24	993	233	<u>991</u>	<u>234</u>	991	234	24	972	238	969	239	<u>971</u>	<u>239</u>
403.gcc	24	544	355	541	357	<u>542</u>	<u>357</u>	24	544	355	541	357	<u>542</u>	<u>357</u>
429.mcf	24	309	709	<u>309</u>	<u>708</u>	310	707	24	309	709	<u>309</u>	<u>708</u>	310	707
445.gobmk	24	806	312	803	314	<u>804</u>	<u>313</u>	24	767	328	<u>768</u>	<u>328</u>	786	320
456.hammer	24	381	588	<u>380</u>	<u>589</u>	380	589	24	<u>341</u>	<u>657</u>	341	656	340	658
458.sjeng	24	909	320	907	320	<u>907</u>	<u>320</u>	24	883	329	<u>865</u>	<u>336</u>	864	336
462.libquantum	24	173	2870	<u>173</u>	<u>2870</u>	173	2870	24	173	2870	<u>173</u>	<u>2870</u>	173	2870
464.h264ref	24	1003	529	<u>1000</u>	<u>531</u>	990	537	24	986	539	<u>987</u>	<u>538</u>	987	538
471.omnetpp	24	<u>588</u>	<u>255</u>	589	255	587	255	24	554	271	553	271	<u>553</u>	<u>271</u>
473.astar	24	650	259	<u>649</u>	<u>260</u>	649	260	24	650	259	<u>649</u>	<u>260</u>	649	260
483.xalancbmk	24	332	499	333	498	<u>332</u>	<u>499</u>	24	332	499	333	498	<u>332</u>	<u>499</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance
Memory Voltage: 1.5 V

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Express5800/R120e-1M and

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 461

Express5800/R120e-1M (Intel Xeon E5-2630L v2)

SPECint_rate_base2006 = 442

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

General Notes (Continued)

the Express5800/R120e-2M models are electronically equivalent.
The results have been measured on the Express5800/R120e-2M model.

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 461

Express5800/R120e-1M (Intel Xeon E5-2630L v2)

SPECint_rate_base2006 = 442

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 461

Express5800/R120e-1M (Intel Xeon E5-2630L v2)

SPECint_rate_base2006 = 442

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:01:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 December 2013.