



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECint_rate2006 = 733

SPECint_rate_base2006 = 711

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

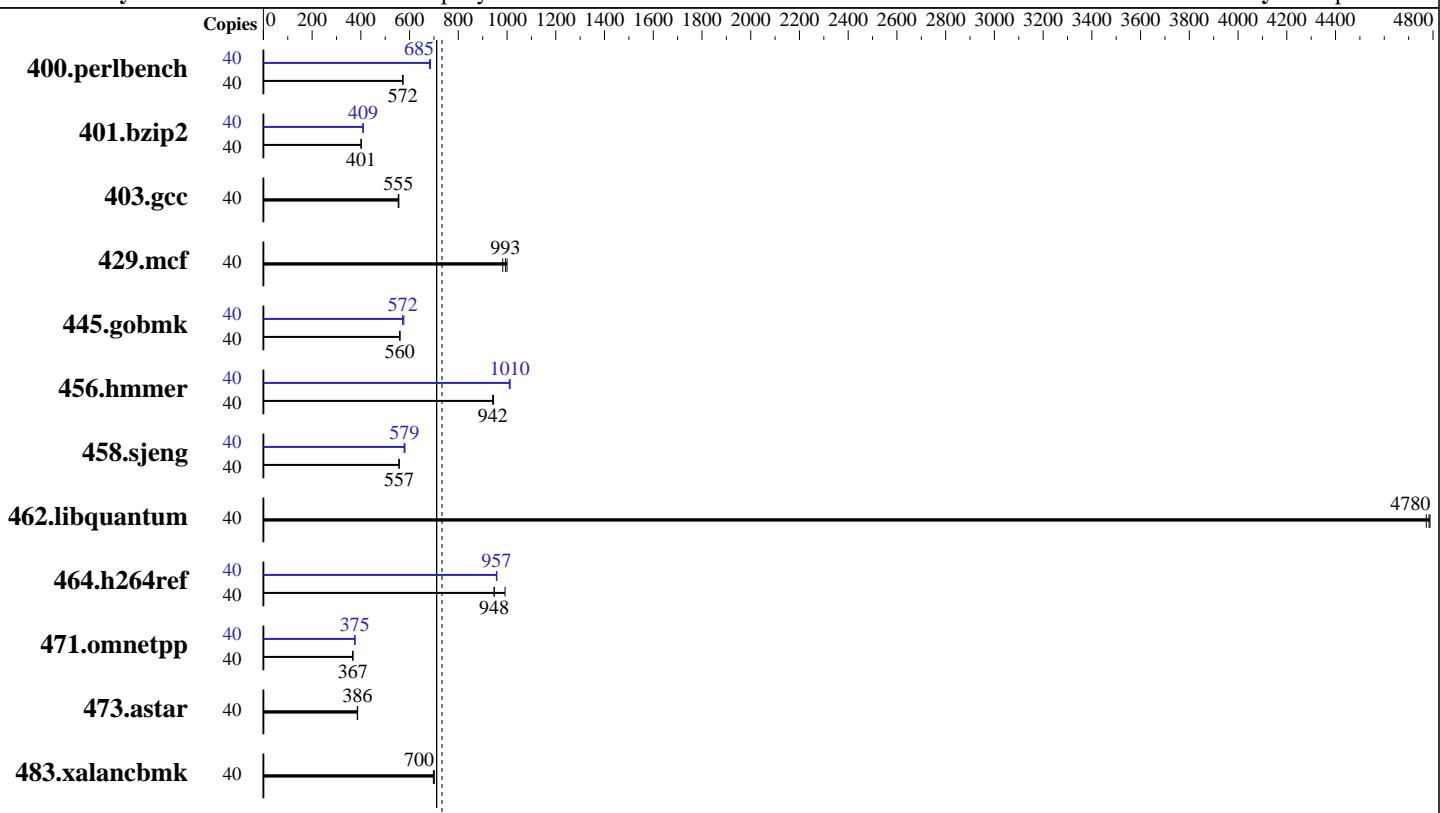

SPECint_rate_base2006 = 711

SPECint_rate2006 = 733

Hardware

CPU Name: Intel Xeon E5-2470 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB 15 K SAS, RAID 1
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
Kernel 3.0.76-0.11-default
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECint_rate2006 = 733

SPECint_rate_base2006 = 711

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	682	573	683	572	683	572	40	573	682	570	686	571	685
401.bzip2	40	963	401	962	401	960	402	40	941	410	943	409	945	408
403.gcc	40	579	556	580	555	582	553	40	579	556	580	555	582	553
429.mcf	40	365	1000	367	993	371	982	40	365	1000	367	993	371	982
445.gobmk	40	750	560	749	561	750	559	40	735	571	733	572	728	577
456.hammer	40	395	945	396	941	396	942	40	369	1010	369	1010	370	1010
458.sjeng	40	869	557	870	557	869	557	40	833	581	838	578	836	579
462.libquantum	40	174	4770	173	4780	173	4790	40	174	4770	173	4780	173	4790
464.h264ref	40	934	948	893	992	935	947	40	924	958	925	957	926	956
471.omnetpp	40	681	367	682	367	681	367	40	666	375	666	375	666	376
473.astar	40	728	386	726	387	728	386	40	728	386	726	387	728	386
483.xalancbmk	40	394	701	394	700	396	698	40	394	701	394	700	396	698

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Disabled unused Linux services through "stop_services.sh" before running.

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECint_rate2006 = 733

SPECint_rate_base2006 = 711

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECint_rate2006 = 733

SPECint_rate_base2006 = 711

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360e Gen8
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECint_rate2006 = 733

SPECint_rate_base2006 = 711

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:16:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2014.