



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL680c G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_rate2006 = 1070**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Dec-2013

**Hardware Availability:** May-2011

**Software Availability:** Sep-2013

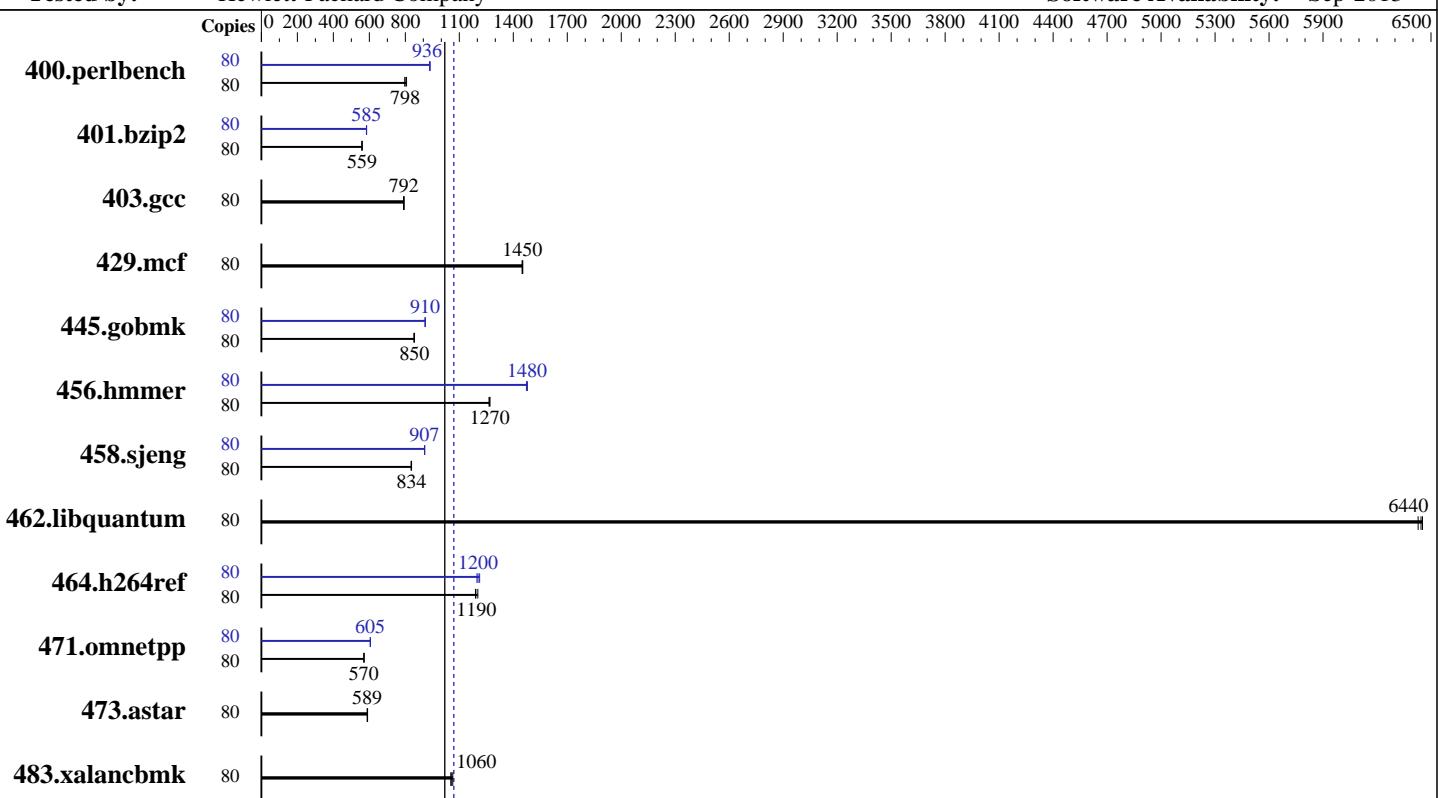

**SPECint\_rate\_base2006 = 1020**

**SPECint\_rate2006 = 1070**

### Hardware

CPU Name: Intel Xeon E7-4860  
CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz  
CPU MHz: 2267  
FPU: Integrated  
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 24 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (64 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 4 x 120 GB SATA 2.5 SSD, RAID 0  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago)  
Compiler: Kernel 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL680c G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_rate2006 = 1070**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2011

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	<b>979</b>	<b>798</b>	980	798	969	807	80	836	935	834	937	<b>835</b>	<b>936</b>
401.bzip2	80	<b>1380</b>	<b>559</b>	1379	560	1381	559	80	1323	584	1320	585	<b>1321</b>	<b>585</b>
403.gcc	80	815	790	812	793	<b>814</b>	<b>792</b>	80	815	790	812	793	<b>814</b>	<b>792</b>
429.mcf	80	502	1450	503	1450	<b>503</b>	<b>1450</b>	80	502	1450	503	1450	<b>503</b>	<b>1450</b>
445.gobmk	80	<b>987</b>	<b>850</b>	990	848	987	851	80	922	911	<b>922</b>	<b>910</b>	922	910
456.hmmer	80	<b>588</b>	<b>1270</b>	588	1270	590	1270	80	<b>506</b>	<b>1480</b>	507	1470	<b>505</b>	1480
458.sjeng	80	1163	832	<b>1161</b>	<b>834</b>	1160	835	80	<b>1067</b>	<b>907</b>	1067	907	1066	908
462.libquantum	80	258	6430	<b>257</b>	<b>6440</b>	257	6450	80	258	6430	<b>257</b>	<b>6440</b>	257	6450
464.h264ref	80	1472	1200	1488	1190	<b>1485</b>	<b>1190</b>	80	1460	1210	1478	1200	<b>1470</b>	<b>1200</b>
471.omnetpp	80	877	570	877	570	<b>877</b>	<b>570</b>	80	826	605	825	606	<b>826</b>	<b>605</b>
473.astar	80	954	589	<b>954</b>	<b>589</b>	952	590	80	954	589	<b>954</b>	<b>589</b>	952	590
483.xalancbmk	80	519	1060	524	1050	<b>522</b>	<b>1060</b>	80	519	1060	524	1050	<b>522</b>	<b>1060</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Disabled unused Linux services through "stop\_services.sh" before running.

## Platform Notes

### BIOS Configuration:

HP Power Profile set to Maximum Performance  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Increased Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Double Refresh Rate set to disabled

Sysinfo program /cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on BL680c-G7 Tue Dec 17 09:39:02 2013

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL680c G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_rate2006 = 1070**

**SPECint\_rate\_base2006 = 1020**

**CPU2006 license:** 3

**Test date:** Dec-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 4860 @ 2.27GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 8 9 16 17 18 24 25
    physical 1: cores 0 1 2 8 9 16 17 18 24 25
    physical 2: cores 0 1 2 8 9 16 17 18 24 25
    physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 24576 KB
```

```
From /proc/meminfo
MemTotal:      264664592 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux BL680c-G7 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 16 10:59
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  438G  19G  398G   5%  /
```

```
Additional information from dmidecode:
BIOS HP I25 07/01/2013
Memory:
 64x Not Specified Not Specified 4 GB 1067 MHz 2 rank
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:  
64 x HP 500203-061 4 GB 1067 MHz 2 rank



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL680c G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_rate2006 = 1070**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2011

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

  icc -m32

C++ benchmarks:

  icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

  403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

  icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL680c G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_rate2006 = 1070**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Dec-2013

Hardware Availability: May-2011

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4\_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4\_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL680c G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_rate2006 = 1070**

**SPECint\_rate\_base2006 = 1020**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Dec-2013

**Hardware Availability:** May-2011

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:14:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 January 2014.