



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint®_rate2006 = 429

I620-G15 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

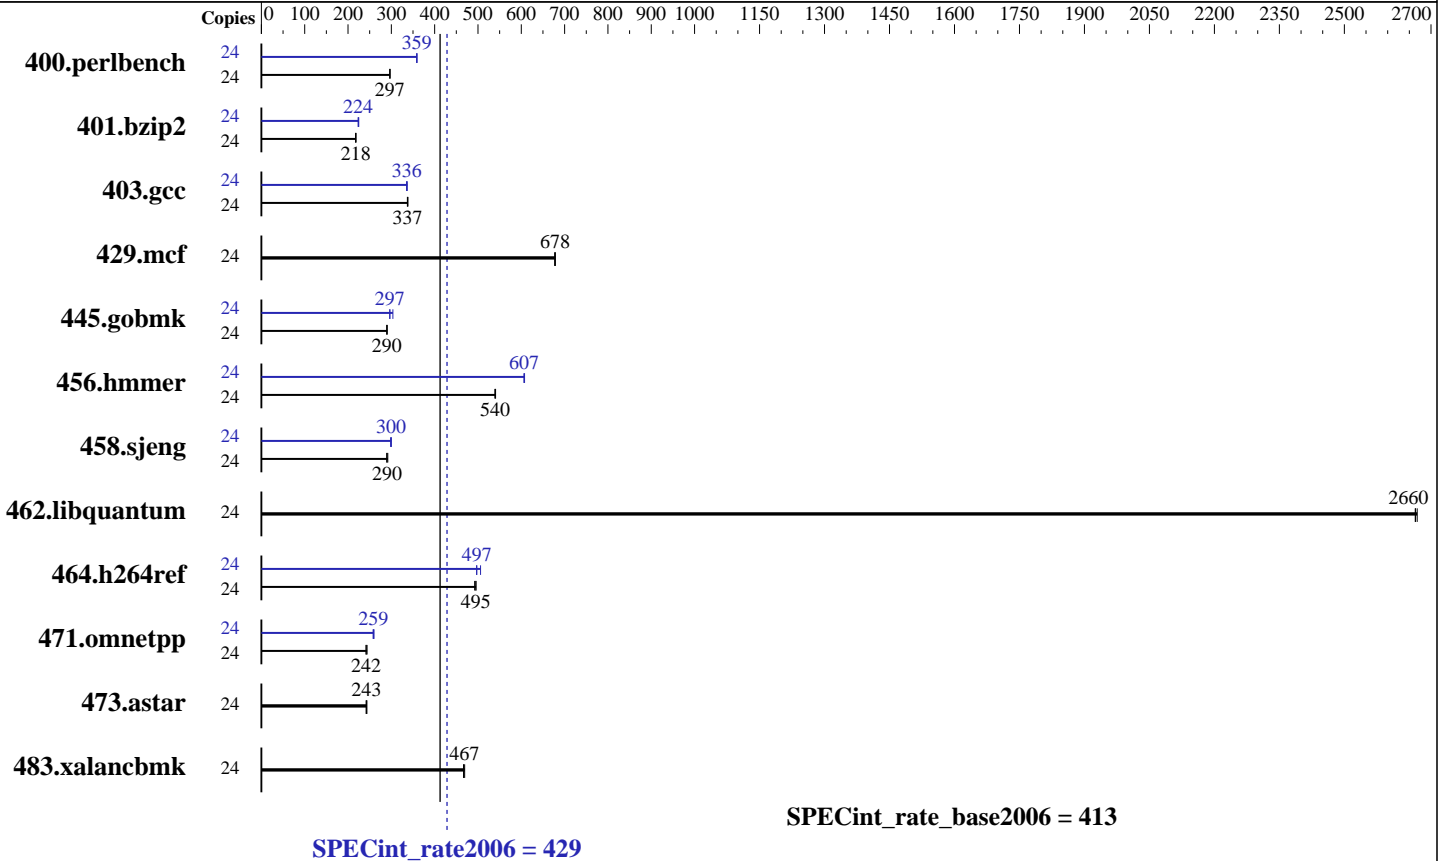

Hardware

CPU Name: Intel Xeon E5-2620 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 X 3 TB SATA 7200 RPM, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 429

I620-G15 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	790	297	791	296	790	297	24	653	359	654	359	653	359
401.bzip2	24	1060	218	1063	218	1065	217	24	1036	224	1030	225	1035	224
403.gcc	24	571	338	573	337	573	337	24	576	335	574	337	576	336
429.mcf	24	323	679	323	677	323	678	24	323	679	323	677	323	678
445.gobmk	24	869	290	870	290	867	290	24	829	304	850	296	849	297
456.hammer	24	415	539	414	541	415	540	24	369	607	369	608	369	606
458.sjeng	24	1004	289	1001	290	995	292	24	973	298	969	300	969	300
462.libquantum	24	187	2660	186	2670	187	2660	24	187	2660	186	2670	187	2660
464.h264ref	24	1079	492	1072	496	1073	495	24	1069	497	1068	497	1050	506
471.omnetpp	24	620	242	615	244	621	242	24	582	258	577	260	580	259
473.astar	24	693	243	692	243	697	242	24	693	243	692	243	697	242
483.xalancbmk	24	355	467	354	467	353	469	24	355	467	354	467	353	469

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Intel Virtualization technology set to disabled

Power Technology set to performance

Turbo boost set to enabled

DDR Speed set to force 1600

Sysinfo program /root/cpu2006/config/sysinfo.rev6874

\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998

running on linux-e494 Thu Nov 28 19:33:30 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz

2 "physical id"s (chips)

24 "processors"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 429

I620-G15 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264522468 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux-e494 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 28 19:26 last=S
```

```
SPEC is set to: /root/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext3  2.7T  548G  2.2T  20% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. V8.100A 10/31/2013

Memory: 16x Samsung M393B2G70QH0-YK0 16 GB 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 429

I620-G15 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

General Notes (Continued)

Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 429

I620-G15 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 429

I620-G15 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:19:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 January 2014.