



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECint\_rate2006 = 811**

**SPECint\_rate\_base2006 = 783**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

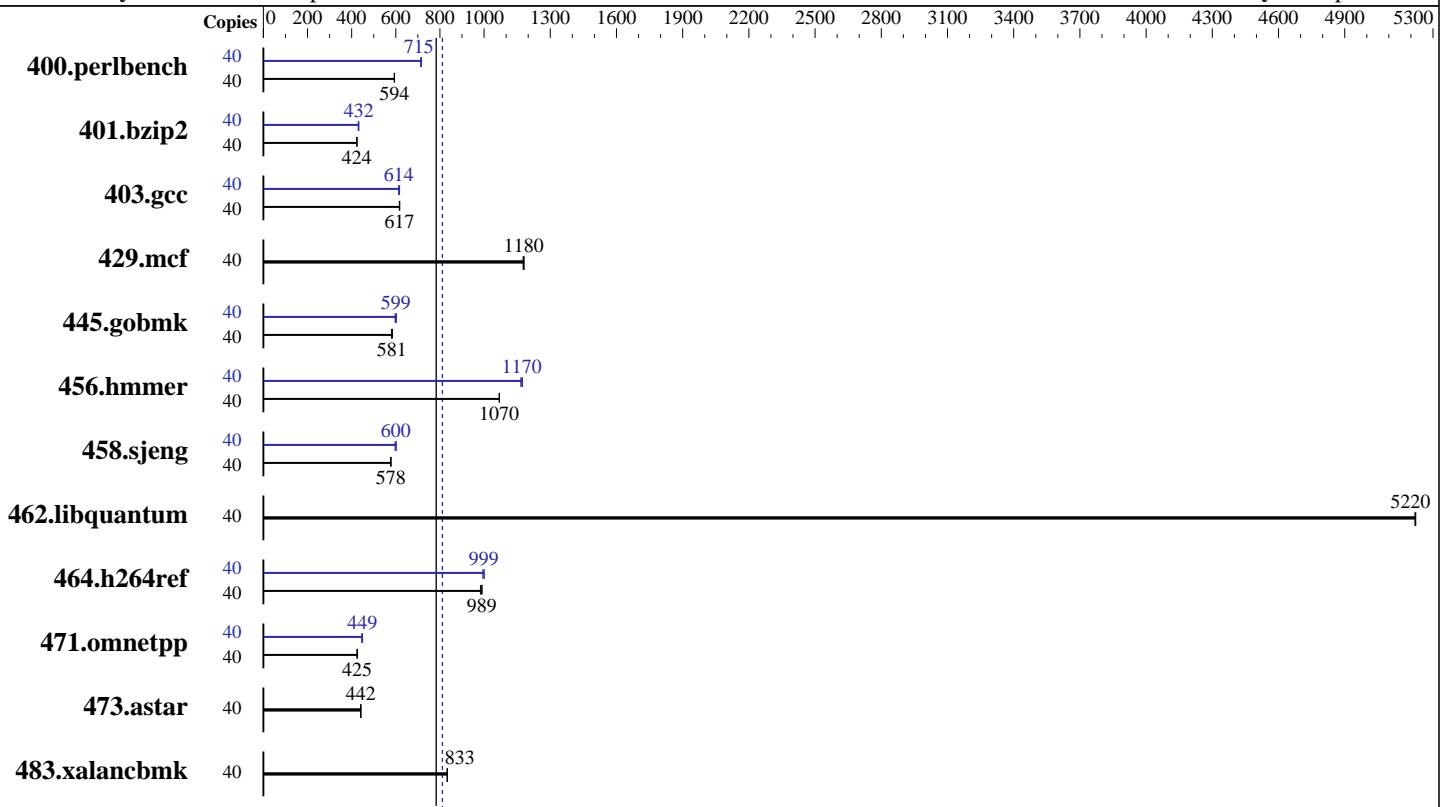

**SPECint\_rate2006 = 811**

## Software

| Hardware             |  |
|----------------------|--|
| CPU Name:            | Intel Xeon E5-2670 v2                            |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.30 GHz      |
| CPU MHz:             | 2500   |
| FPU:                 | Integrated                                       |
| CPU(s) enabled:      | 20 cores, 2 chips, 10 cores/chip, 2 threads/core |
| CPU(s) orderable:    | 1,2 chips  |
| Primary Cache:       | 32 KB I + 32 KB D on chip per core               |
| Secondary Cache:     | 256 KB I+D on chip per core                      |
| L3 Cache:            | 25 MB I+D on chip per chip                       |
| Other Cache:         | None   |
| Memory:              | 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)      |
| Disk Subsystem:      | 1 x 500 GB SATA, 7200 RPM                        |
| Other Hardware:      | None   |

| Software          |   |
|-------------------|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.4 (Santiago)<br>2.6.32-358.el6.x86_64 |
| Compiler:         | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux                      |
| Auto Parallel:    | No  |
| File System:      | ext4  |
| System State:     | Run level 3 (multi-user)  |
| Base Pointers:    | 32-bit  |
| Peak Pointers:    | 32/64-bit   |
| Other Software:   | Microquill SmartHeap V10.0  |



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECint\_rate2006 = 811**

**SPECint\_rate\_base2006 = 783**

CPU2006 license: 11

Test date: Feb-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Results Table

| Benchmark      | Base   |            |             |            |            |            |             | Peak   |            |             |            |             |            |             |
|----------------|--------|------------|-------------|------------|------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|
|                | Copies | Seconds    | Ratio       | Seconds    | Ratio      | Seconds    | Ratio       | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | 40     | 659        | 593         | <b>658</b> | <b>594</b> | 658        | 594         | 40     | 545        | 717         | <b>547</b> | <b>715</b>  | 548        | 713         |
| 401.bzip2      | 40     | 911        | 424         | 911        | 424        | <b>911</b> | <b>424</b>  | 40     | <b>894</b> | <b>432</b>  | 898        | 430         | 893        | 432         |
| 403.gcc        | 40     | 521        | 618         | 523        | 616        | <b>522</b> | <b>617</b>  | 40     | 522        | 617         | <b>524</b> | <b>614</b>  | 525        | 613         |
| 429.mcf        | 40     | <b>309</b> | <b>1180</b> | 310        | 1180       | 309        | 1180        | 40     | <b>309</b> | <b>1180</b> | 310        | 1180        | 309        | 1180        |
| 445.gobmk      | 40     | <b>722</b> | <b>581</b>  | 717        | 585        | 722        | 581         | 40     | 703        | 597         | <b>700</b> | <b>599</b>  | 696        | 603         |
| 456.hammer     | 40     | 349        | 1070        | 349        | 1070       | <b>349</b> | <b>1070</b> | 40     | 320        | 1170        | <b>319</b> | <b>1170</b> | 318        | 1170        |
| 458.sjeng      | 40     | 837        | 578         | <b>838</b> | <b>578</b> | 839        | 577         | 40     | 811        | 597         | 804        | 602         | <b>807</b> | <b>600</b>  |
| 462.libquantum | 40     | 159        | 5220        | 159        | 5220       | <b>159</b> | <b>5220</b> | 40     | 159        | 5220        | 159        | 5220        | <b>159</b> | <b>5220</b> |
| 464.h264ref    | 40     | 900        | 984         | <b>895</b> | <b>989</b> | 893        | 991         | 40     | 890        | 995         | <b>886</b> | <b>999</b>  | 885        | 1000        |
| 471.omnetpp    | 40     | <b>588</b> | <b>425</b>  | 589        | 424        | 587        | 426         | 40     | 556        | 449         | 561        | 445         | <b>556</b> | <b>449</b>  |
| 473.astar      | 40     | 638        | 440         | <b>636</b> | <b>442</b> | 635        | 442         | 40     | 638        | 440         | <b>636</b> | <b>442</b>  | 635        | 442         |
| 483.xalancbmk  | 40     | 331        | 834         | <b>331</b> | <b>833</b> | 331        | 833         | 40     | 331        | 834         | <b>331</b> | <b>833</b>  | 331        | 833         |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on td-2 Wed Feb 19 19:52:48 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECint\_rate2006 = 811**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 11

**Test date:** Feb-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings   : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

From /proc/meminfo
MemTotal:      264640496 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux td-2 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Feb 19 19:44

SPEC is set to: /home/SPECcpu-new
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
                  ext4  380G  160G  201G  45%  /home

Additional information from dmidecode:
BIOS IBM -[TDE133HT2-1.30]- 08/27/2013
Memory:
 16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECint\_rate2006 = 811**

**SPECint\_rate\_base2006 = 783**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

## General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECint\_rate2006 = 811**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Feb-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmr: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmr: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll12 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECint\_rate2006 = 811**

**SPECint\_rate\_base2006 = 783**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Feb-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:35:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.