



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 216

ProLiant DL380p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

SPECint\_rate\_base2006 = 208

CPU2006 license: 3


Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2013

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

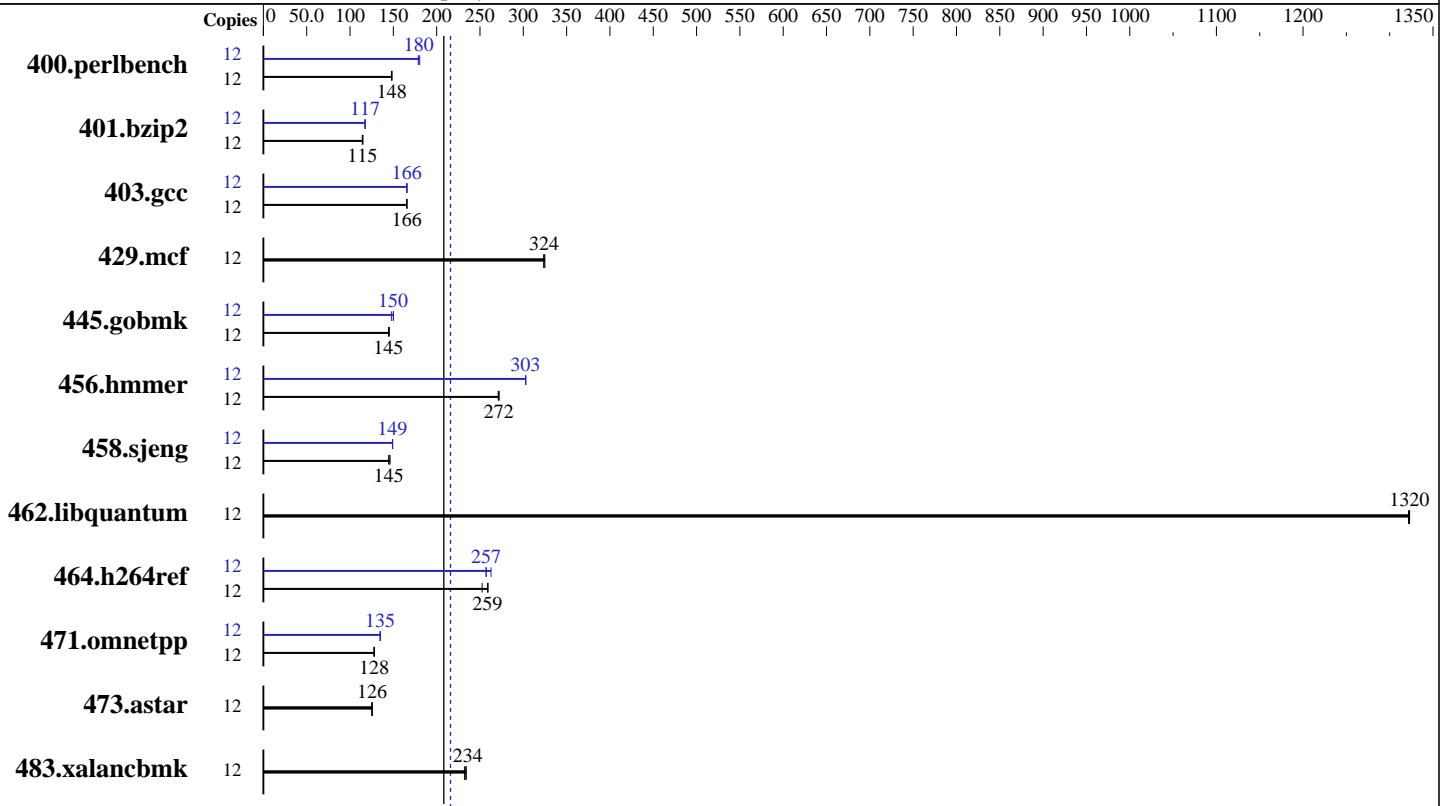

SPECint\_rate2006 = 216

SPECint\_rate\_base2006 = 208

### Hardware

CPU Name: Intel Xeon E5-2620 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 1Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)  
 Disk Subsystem: 2 x 300 GB 15 K SAS, RAID 1  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago)  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 216

ProLiant DL380p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

SPECint\_rate\_base2006 = 208

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jan-2014  
Hardware Availability: Nov-2013  
Software Availability: Oct-2013

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	790	148	793	148	<u>791</u>	<u>148</u>	12	<u>653</u>	<u>180</u>	656	179	650	180
401.bzip2	12	1014	114	1008	115	<u>1011</u>	<u>115</u>	12	987	117	986	117	<u>986</u>	<u>117</u>
403.gcc	12	583	166	<u>584</u>	<u>166</u>	584	165	12	<u>584</u>	<u>166</u>	582	166	584	165
429.mcf	12	337	325	<u>338</u>	<u>324</u>	338	324	12	337	325	<u>338</u>	<u>324</u>	338	324
445.gobmk	12	866	145	871	144	<u>871</u>	<u>145</u>	12	852	148	<u>840</u>	<u>150</u>	838	150
456.hammer	12	<u>412</u>	<u>272</u>	412	272	413	271	12	370	303	370	303	<u>370</u>	<u>303</u>
458.sjeng	12	<u>1002</u>	<u>145</u>	993	146	1003	145	12	<u>974</u>	<u>149</u>	973	149	975	149
462.libquantum	12	188	1320	188	1320	<u>188</u>	<u>1320</u>	12	188	1320	188	1320	<u>188</u>	<u>1320</u>
464.h264ref	12	1024	259	<u>1026</u>	<u>259</u>	1052	252	12	1034	257	<u>1032</u>	<u>257</u>	1011	263
471.omnetpp	12	585	128	588	128	<u>586</u>	<u>128</u>	12	557	135	555	135	<u>556</u>	<u>135</u>
473.astar	12	671	126	<u>671</u>	<u>126</u>	673	125	12	671	126	<u>671</u>	<u>126</u>	673	125
483.xalancbmk	12	354	234	<u>354</u>	<u>234</u>	357	232	12	354	234	<u>354</u>	<u>234</u>	357	232

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

### Platform Notes

```
BIOS Configuration:
HP Power Profile set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Thermal Configuration set so Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /home/cpu/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on PL14_DL380 Thu Jan 30 15:46:59 2014
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 216

ProLiant DL380p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

SPECint\_rate\_base2006 = 208

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2014  
**Hardware Availability:** Nov-2013  
**Software Availability:** Oct-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
 1 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 6
  siblings     : 12
  physical 0   : cores 0 1 2 3 4 5
cache size    : 15360 KB
```

```
From /proc/meminfo
MemTotal:      65932388 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux PL14_DL380 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 30 15:37

```
SPEC is set to: /home/cpu
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_pl14_dl380-lv_home
                ext4      222G  5.2G  205G   3% /home
```

```
Additional information from dmidecode:
BIOS HP P70 11/14/2013
Memory:
8x HP 731657-081 8 GB 1600 MHz 1 rank
16x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)  
Regarding the sysinfo display about the memory installed, the correct amount of memory is 64 GB and the dmidecode description should have one line reading as:  
8x HP 731657-081 8 GB 1600 MHz 1 rank



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 216**

ProLiant DL380p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint\_rate\_base2006 = 208**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2014  
**Hardware Availability:** Nov-2013  
**Software Availability:** Oct-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu/libs/32:/home/cpu/libs/64:/home/cpu/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 216**

ProLiant DL380p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint\_rate\_base2006 = 208**

**CPU2006 license:** 3

**Test date:** Jan-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 216**

ProLiant DL380p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint\_rate\_base2006 = 208**

**CPU2006 license:** 3

**Test date:** Jan-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:44:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.