



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®_rate2006 = 794

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 768

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

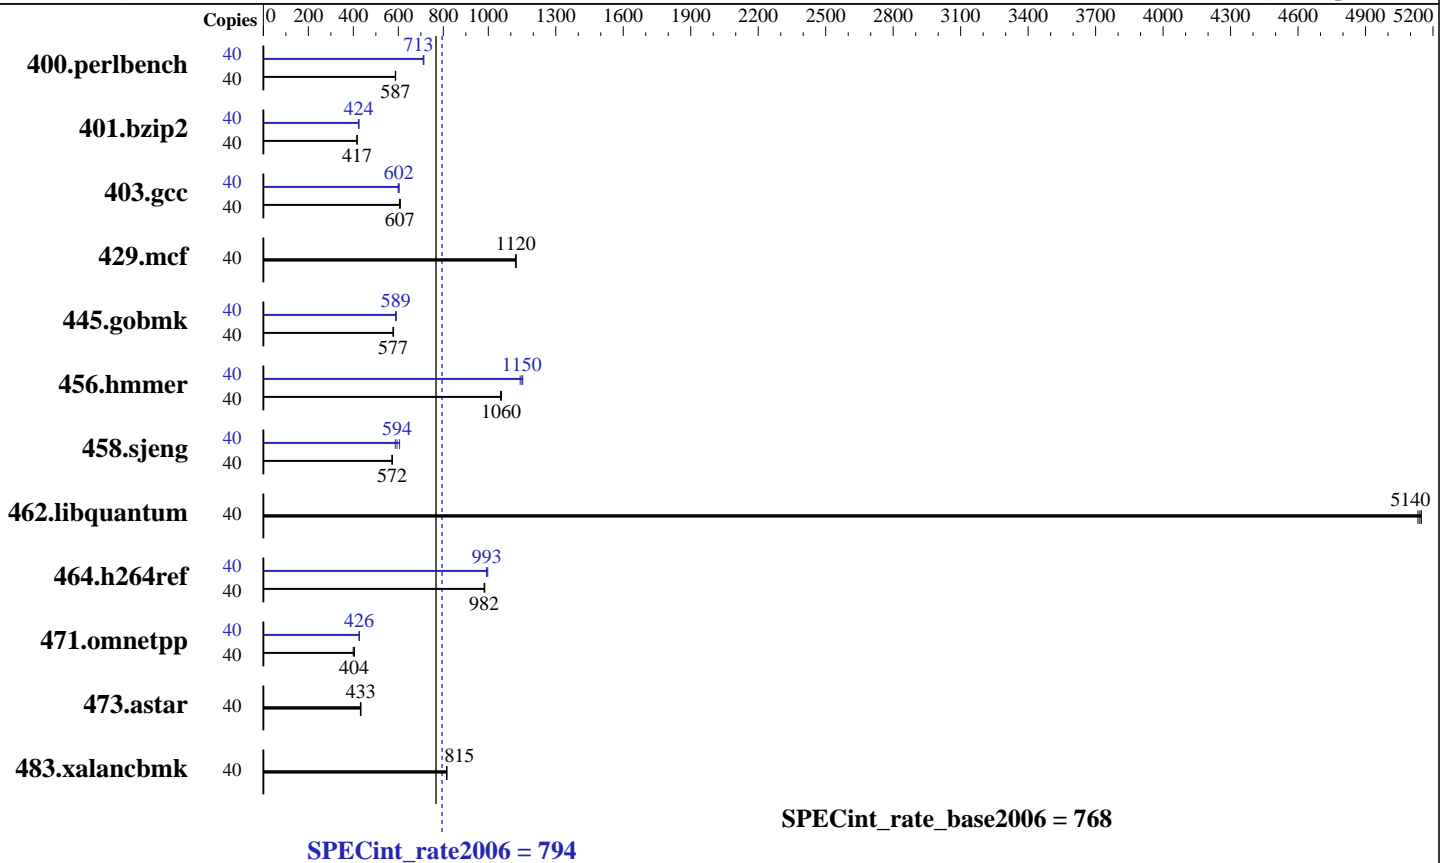

Hardware

CPU Name: Intel Xeon E5-2670 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)

Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 794

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 768

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	664	588	666	587	665	587	40	550	711	548	713	548	713
401.bzip2	40	926	417	928	416	926	417	40	909	425	912	423	910	424
403.gcc	40	529	609	531	607	532	605	40	535	602	534	603	538	599
429.mcf	40	325	1120	325	1120	325	1120	40	325	1120	325	1120	325	1120
445.gobmk	40	728	577	727	577	725	579	40	714	588	710	591	712	589
456.hammer	40	353	1060	353	1060	354	1050	40	325	1150	324	1150	327	1140
458.sjeng	40	846	572	844	573	846	572	40	815	594	826	586	799	606
462.libquantum	40	161	5130	161	5150	161	5140	40	161	5130	161	5150	161	5140
464.h264ref	40	901	982	901	982	899	984	40	892	992	891	993	887	997
471.omnetpp	40	626	399	619	404	617	405	40	586	427	587	426	586	426
473.astar	40	649	433	651	431	648	433	40	649	433	651	431	648	433
483.xalancbmk	40	339	815	339	815	338	816	40	339	815	339	815	338	816

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Mar 4 17:55:10 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings : 20

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 794

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 768

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132334256 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 4 17:52
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      133G  16G  110G  13% /
```

```
Additional information from dmidecode:
BIOS HITACHI EP1043 02/04/2014
Memory:
16x Not Specified Not Specified
8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
BladeSymphony BS520H and Hitachi Compute Blade 520H are electronically equivalent.
The results have been measured on a BladeSymphony BS520H



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 794

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 768

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 794

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 768

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 794

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 768

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:43:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2014.