



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2430 v2,  
2.50 GHz)

**SPECint\_rate2006 = 475**

**SPECint\_rate\_base2006 = 454**

CPU2006 license: 9017


Test date: Mar-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Feb-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

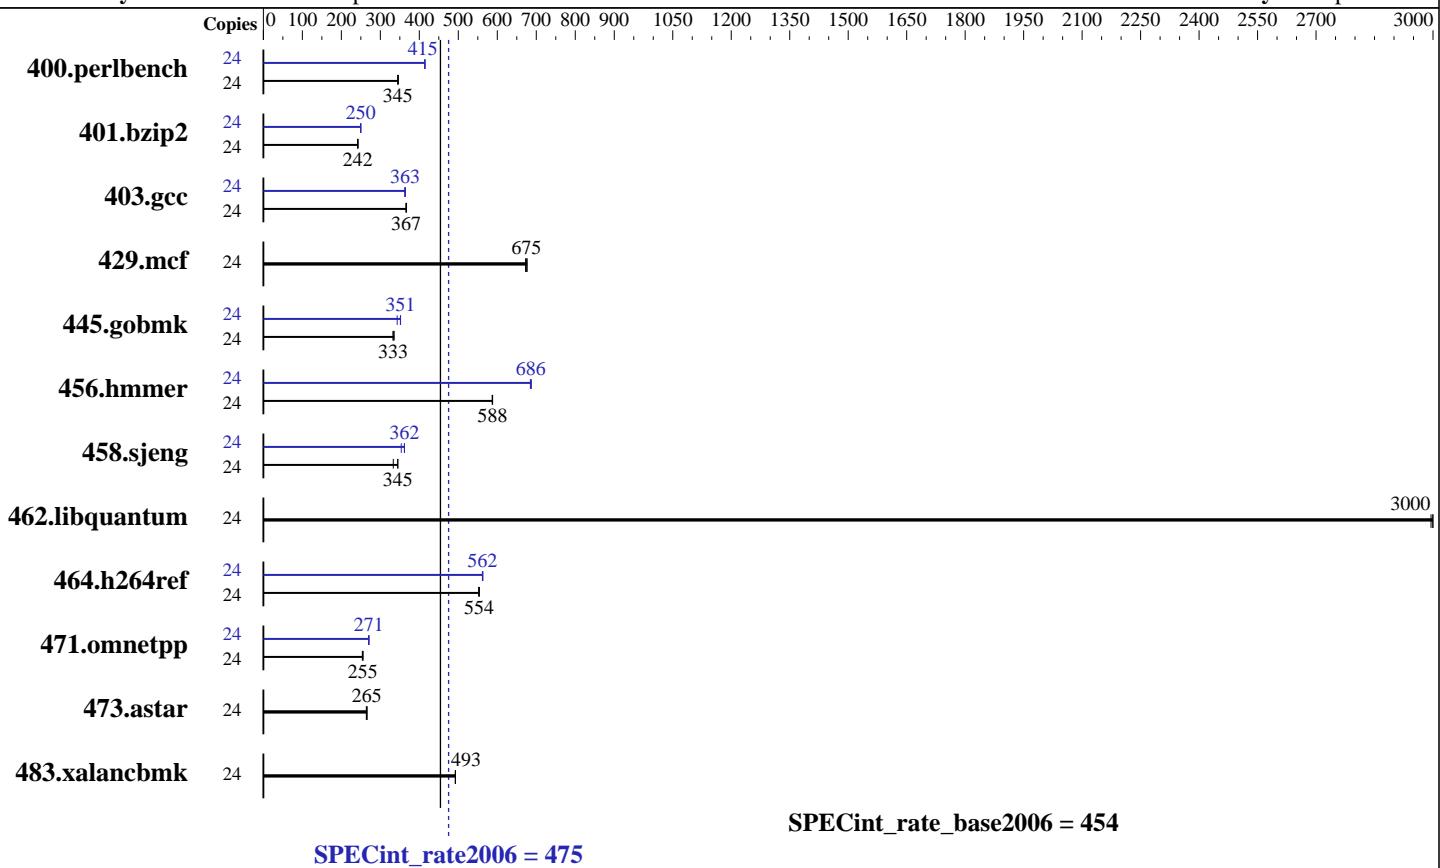

### Hardware

CPU Name: Intel Xeon E5-2430 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx8 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x 400 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: 2.6.32-358.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2430 v2,  
2.50 GHz)

**SPECint\_rate2006 = 475**

**SPECint\_rate\_base2006 = 454**

CPU2006 license: 9017

Test date: Mar-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Feb-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	680	345	<b>680</b>	<b>345</b>	677	346	24	567	414	<b>566</b>	<b>415</b>	566	415
401.bzip2	24	958	242	<b>957</b>	<b>242</b>	953	243	24	<b>927</b>	<b>250</b>	928	250	927	250
403.gcc	24	<b>527</b>	<b>367</b>	526	367	529	366	24	530	364	<b>532</b>	<b>363</b>	533	363
429.mcf	24	<b>324</b>	<b>675</b>	324	677	326	672	24	<b>324</b>	<b>675</b>	324	677	326	672
445.gobmk	24	756	333	<b>756</b>	<b>333</b>	750	336	24	<b>716</b>	<b>351</b>	734	343	716	352
456.hammer	24	382	587	<b>381</b>	<b>588</b>	381	588	24	326	687	<b>327</b>	<b>686</b>	327	685
458.sjeng	24	872	333	842	345	<b>843</b>	<b>345</b>	24	<b>803</b>	<b>362</b>	803	362	821	354
462.libquantum	24	166	3000	166	2990	<b>166</b>	<b>3000</b>	24	166	3000	166	2990	<b>166</b>	<b>3000</b>
464.h264ref	24	962	552	<b>960</b>	<b>554</b>	959	554	24	945	562	<b>945</b>	<b>562</b>	943	563
471.omnetpp	24	587	256	<b>589</b>	<b>255</b>	591	254	24	556	270	554	271	<b>554</b>	<b>271</b>
473.astar	24	638	264	634	266	<b>635</b>	<b>265</b>	24	638	264	634	266	<b>635</b>	<b>265</b>
483.xalancbmk	24	336	492	<b>336</b>	<b>493</b>	336	493	24	336	492	<b>336</b>	<b>493</b>	336	493

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /root/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$
running on TD340 Sat Mar  8 07:25:39 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430 v2 @ 2.50GHz
  2 "physical id"s (chips)
  24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2430 v2,  
2.50 GHz)

**SPECint\_rate2006 = 475**

**SPECint\_rate\_base2006 = 454**

**CPU2006 license:** 9017

**Test date:** Mar-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      99031464 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux TD340 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Mar 7 13:00

SPEC is set to: /root/cpu2006
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/sda2        ext4   363G   13G  332G   4%  /

Additional information from dmidecode:
BIOS LENOVO A3TS0FA 12/05/2013
Memory:
12x 8 GB
12x Samsung M393B1G73QH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
TD340 support 3 channels and 6 DIMMS per CPU, total 6 channels and 12 DIMMS.
All 12 DIMM slots installed with 8 GB DIMM for this run.
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2430 v2,  
2.50 GHz)

**SPECint\_rate2006 = 475**

**SPECint\_rate\_base2006 = 454**

**CPU2006 license:** 9017

**Test date:** Mar-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2430 v2,  
2.50 GHz)

**SPECint\_rate2006 = 475**

**SPECint\_rate\_base2006 = 454**

**CPU2006 license:** 9017

**Test date:** Mar-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
  
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
  
403.gcc: -xAVX -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap  
  
473.astar: basepeak = yes  
  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2430 v2,  
2.50 GHz)

**SPECint\_rate2006 = 475**

**SPECint\_rate\_base2006 = 454**

**CPU2006 license:** 9017

**Test date:** Mar-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:41:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 April 2014.