



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro SuperServer 1027R-WRF4+  
(X9DRW-3LN4F+, Intel Xeon E5-2620 v2)

SPECint®\_rate2006 = 430

SPECint\_rate\_base2006 = 414

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

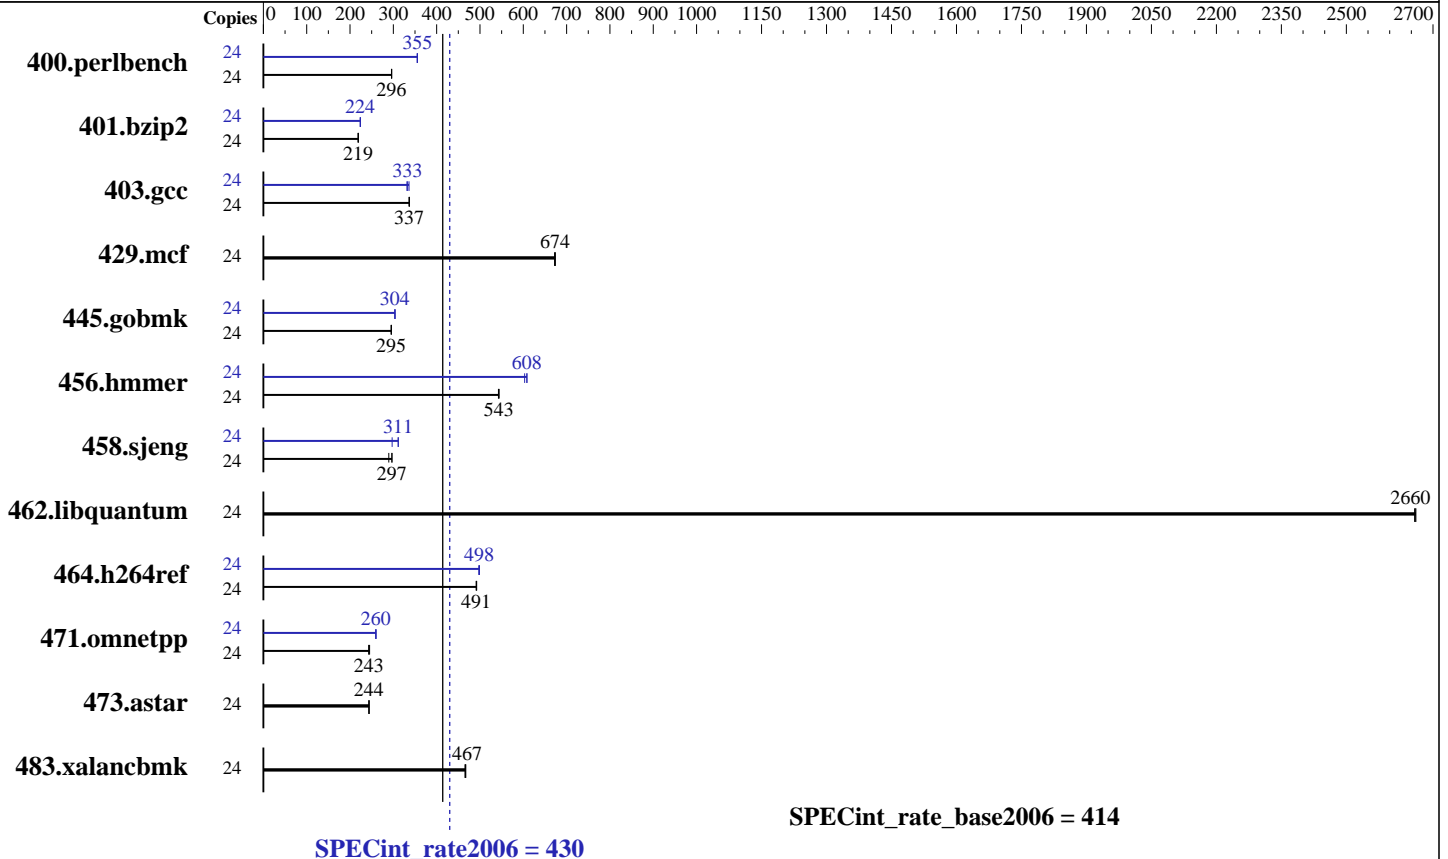

### Hardware

CPU Name: Intel Xeon E5-2620 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro SuperServer 1027R-WRF4+  
(X9DRW-3LN4F+, Intel Xeon E5-2620 v2)

SPECint\_rate2006 = 430

SPECint\_rate\_base2006 = 414

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2014  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	792	296	<u>792</u>	<u>296</u>	793	296	24	659	356	660	355	<u>660</u>	<u>355</u>
401.bzip2	24	1057	219	1060	219	<u>1057</u>	<u>219</u>	24	1035	224	<u>1035</u>	<u>224</u>	1034	224
403.gcc	24	<u>574</u>	<u>337</u>	575	336	573	337	24	575	336	583	331	<u>580</u>	<u>333</u>
429.mcf	24	326	672	<u>325</u>	<u>674</u>	325	674	24	326	672	<u>325</u>	<u>674</u>	325	674
445.gobmk	24	853	295	<u>852</u>	<u>295</u>	852	295	24	829	304	<u>829</u>	<u>304</u>	829	304
456.hammer	24	413	543	<u>412</u>	<u>543</u>	412	544	24	368	608	371	603	<u>368</u>	<u>608</u>
458.sjeng	24	978	297	1003	290	<u>979</u>	<u>297</u>	24	977	297	932	311	<u>933</u>	<u>311</u>
462.libquantum	24	187	2660	187	2660	<u>187</u>	<u>2660</u>	24	187	2660	187	2660	<u>187</u>	<u>2660</u>
464.h264ref	24	<u>1081</u>	<u>491</u>	1081	491	1079	492	24	<u>1066</u>	<u>498</u>	1068	497	1065	499
471.omnetpp	24	<u>616</u>	<u>243</u>	612	245	616	243	24	578	259	577	260	<u>578</u>	<u>260</u>
473.astar	24	690	244	<u>691</u>	<u>244</u>	691	244	24	690	244	<u>691</u>	<u>244</u>	691	244
483.xalancbmk	24	354	467	<u>355</u>	<u>467</u>	356	465	24	354	467	<u>355</u>	<u>467</u>	356	465

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on 170-231.jnet Tue Mar 11 20:21:03 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz  
2 "physical id"s (chips)  
24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 6  
siblings : 12

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint\_rate2006 = 430

Supermicro SuperServer 1027R-WRF4+  
(X9DRW-3LN4F+, Intel Xeon E5-2620 v2)

SPECint\_rate\_base2006 = 414

CPU2006 license: 001176

Test date: Mar-2014

Test sponsor: Supermicro

Hardware Availability: Oct-2013

Tested by: Supermicro

Software Availability: Sep-2013

### Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132124584 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux 170-231.jnet 2.6.32-358.23.2.el6.x86_64 #1 SMP Sat Sep 14 05:32:37 EDT
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 11 15:55
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      241G   85G  144G  37% /
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. 3.0a 02/06/2014
Memory:
16x 8 GB
1x DimmA3_Manufacturer DimmA3_PartNumber
1x DimmB3_Manufacturer DimmB3_PartNumber
1x DimmC3_Manufacturer DimmC3_PartNumber
1x DimmD3_Manufacturer DimmD3_PartNumber
1x DimmE3_Manufacturer DimmE3_PartNumber
1x DimmF3_Manufacturer DimmF3_PartNumber
1x DimmG3_Manufacturer DimmG3_PartNumber
1x DimmH3_Manufacturer DimmH3_PartNumber
16x Hynix Semiconductor HMT31GR7CFR4C-RD 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro SuperServer 1027R-WRF4+  
(X9DRW-3LN4F+, Intel Xeon E5-2620 v2)

SPECint\_rate2006 = 430

SPECint\_rate\_base2006 = 414

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2014  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

### General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

### Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

### Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

### Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

### Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

### Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro SuperServer 1027R-WRF4+  
(X9DRW-3LN4F+, Intel Xeon E5-2620 v2)

SPECint\_rate2006 = 430

SPECint\_rate\_base2006 = 414

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2014  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro SuperServer 1027R-WRF4+  
(X9DRW-3LN4F+, Intel Xeon E5-2620 v2)

SPECint\_rate2006 = 430

SPECint\_rate\_base2006 = 414

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:31:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 May 2014.