SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2670 v2)

SPECint®_rate2006 = 810

SPECint_rate_base2006 = 783

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2014
Hardware Availability: Oct-2013
Software Availability: Sep-2013

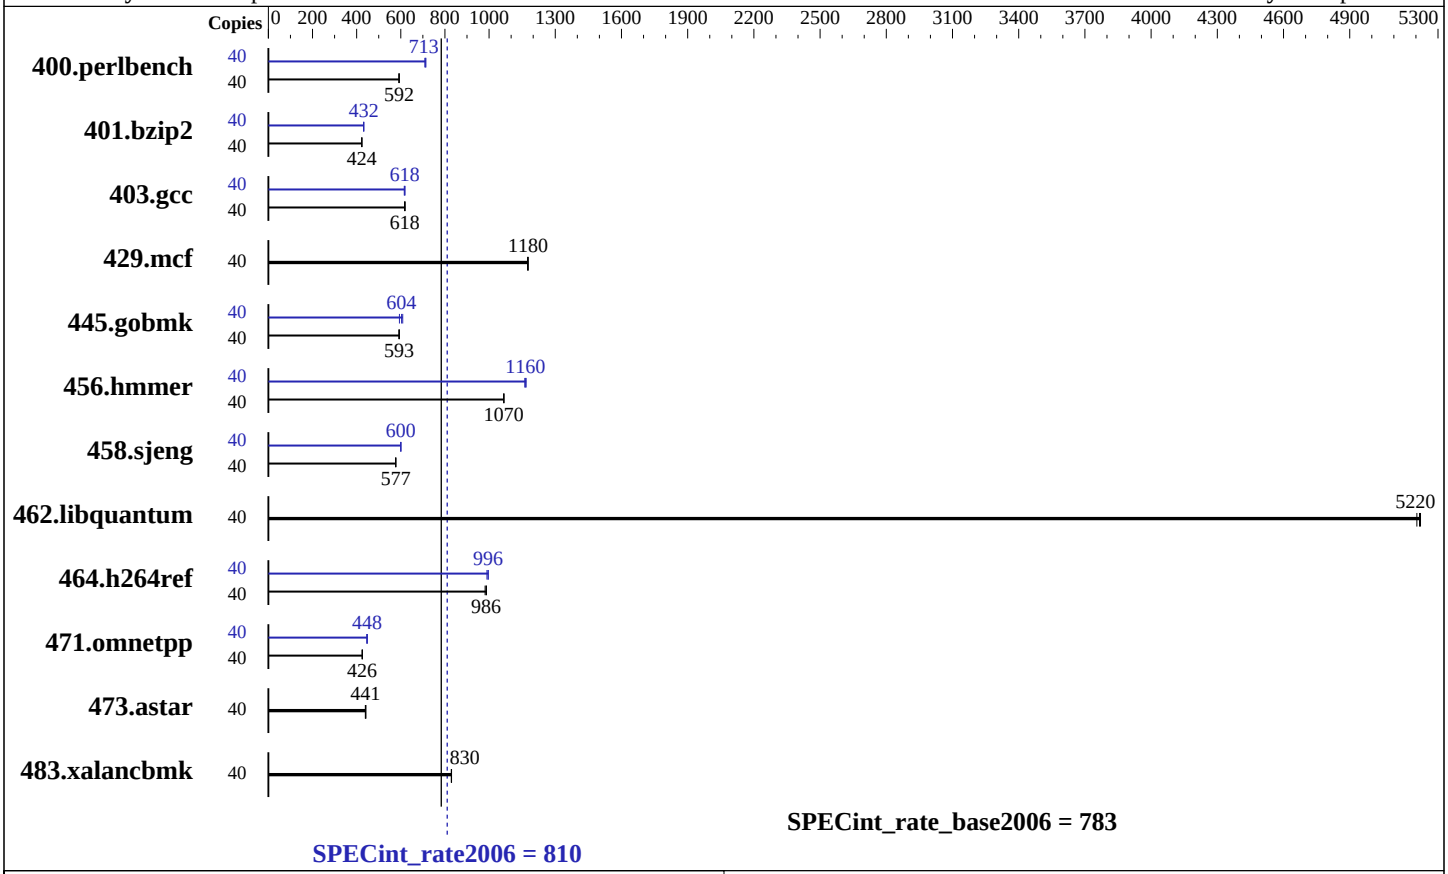

Hardware

CPU Name:	Intel Xeon E5-2670 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 x 500 GB SATA II, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 1027R-WRF4+
(X9DRW-3LN4F+, Intel Xeon E5-2670 v2)

SPECint_rate2006 = 810

SPECint_rate_base2006 = 783

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2014
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	659	593	**660**	**592**	661	591	40	**548**	**713**	548	713	551	709
401.bzip2	40	911	424	**911**	**424**	912	423	40	894	432	**894**	**432**	893	432
403.gcc	40	522	617	520	620	**521**	**618**	40	520	619	523	616	**521**	**618**
429.mcf	40	310	1180	**310**	**1180**	311	1170	40	310	1180	**310**	**1180**	311	1170
445.gobmk	40	**707**	**593**	707	593	709	591	40	689	609	**695**	**604**	707	594
456.hmmer	40	350	1070	**350**	**1070**	350	1070	40	319	1170	**320**	**1160**	321	1160
458.sjeng	40	840	576	838	578	**838**	**577**	40	806	601	**807**	**600**	807	600
462.libquantum	40	159	5200	159	5220	**159**	**5220**	40	159	5200	159	5220	**159**	**5220**
464.h264ref	40	896	988	901	982	**898**	**986**	40	889	996	894	990	**889**	**996**
471.omnetpp	40	**587**	**426**	589	425	587	426	40	558	448	**558**	**448**	561	446
473.astar	40	**637**	**441**	639	439	636	442	40	**637**	**441**	639	439	636	442
483.xalancbmk	40	333	830	**333**	**830**	333	829	40	333	830	**333**	**830**	333	829

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on 170-231.jnet Sat Mar  8 11:24:33 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
     cache size : 25600 KB

  From /proc/meminfo
     MemTotal:       132122600 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.4 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux 170-231.jnet 2.6.32-358.23.2.el6.x86_64 #1 SMP Sat Sep 14 05:32:37 EDT
     2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Mar 8 11:15

  SPEC is set to: /usr/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda2      ext4    241G   85G  144G  37% /

  Additional information from dmidecode:
    BIOS American Megatrends Inc. 3.0a 02/06/2014
    Memory:
     16x   8 GB
     1x DimmA3_Manufacturer DimmA3_PartNumber
     1x DimmB3_Manufacturer DimmB3_PartNumber
     1x DimmC3_Manufacturer DimmC3_PartNumber
     1x DimmD3_Manufacturer DimmD3_PartNumber
     1x DimmE3_Manufacturer DimmE3_PartNumber
     1x DimmF3_Manufacturer DimmF3_PartNumber
     1x DimmG3_Manufacturer DimmG3_PartNumber
     1x DimmH3_Manufacturer DimmH3_PartNumber
     16x Hynix Semiconductor HMT31GR7CFR4C-RD 8 GB 1866 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
```

Continued on next page

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:31:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2014.