



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECint®2006 = 58.8

SPECint_base2006 = 55.1

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

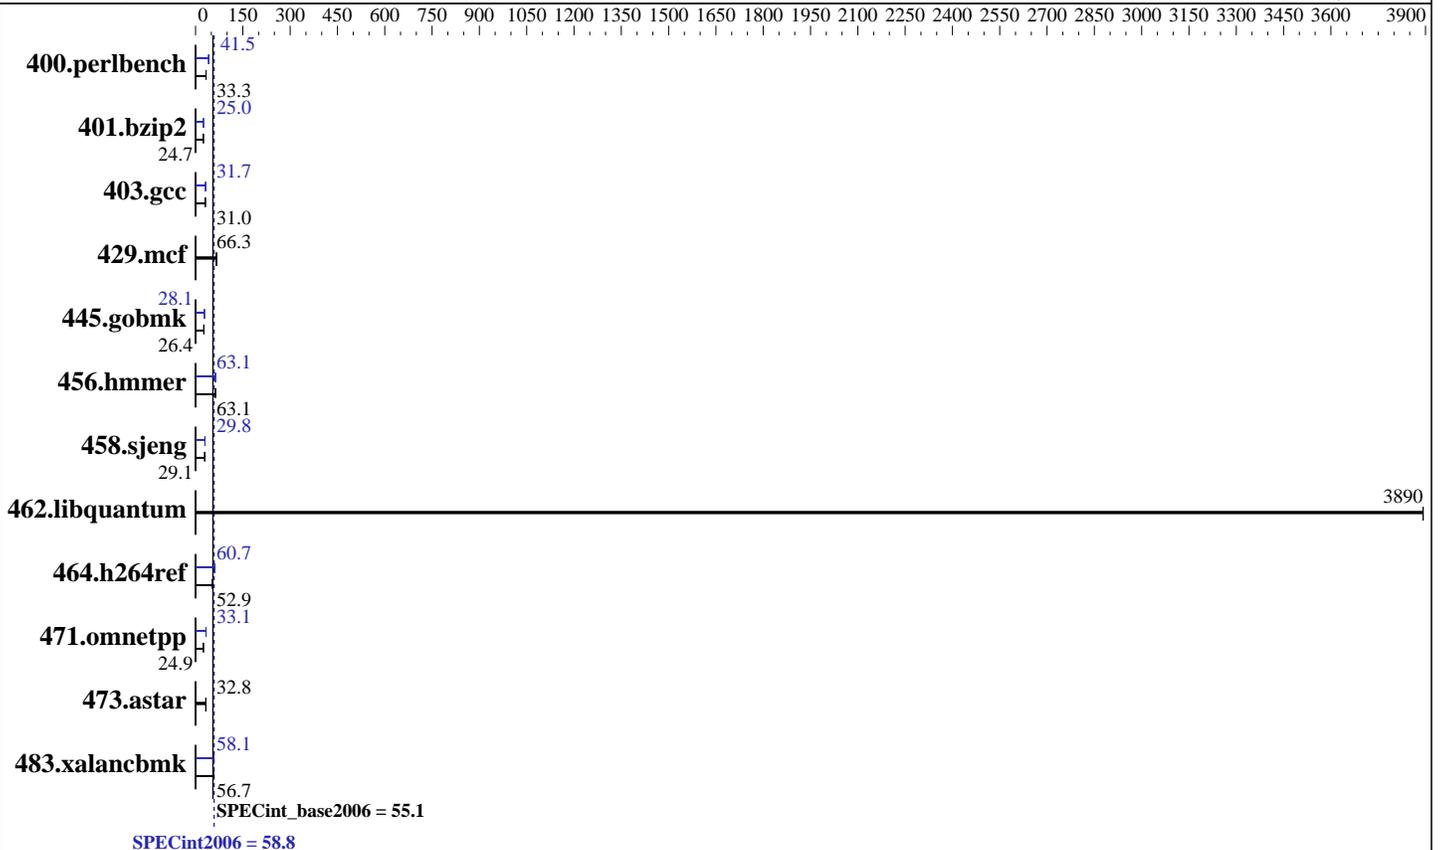

Hardware

CPU Name: Intel Xeon E5-4627 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 1TB 7200 RPM Near-Line SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECint_base2006 = 55.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2014
Hardware Availability: Mar-2014
Software Availability: Aug-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	294	33.2	<u>294</u>	<u>33.3</u>	293	33.3	235	41.5	<u>235</u>	<u>41.5</u>	236	41.5
401.bzip2	<u>391</u>	<u>24.7</u>	391	24.7	391	24.7	386	25.0	<u>386</u>	<u>25.0</u>	387	25.0
403.gcc	259	31.1	<u>259</u>	<u>31.0</u>	259	31.0	254	31.7	254	31.7	<u>254</u>	<u>31.7</u>
429.mcf	138	66.3	<u>138</u>	<u>66.3</u>	138	66.3	138	66.3	<u>138</u>	<u>66.3</u>	138	66.3
445.gobmk	397	26.4	<u>397</u>	<u>26.4</u>	398	26.4	373	28.1	373	28.1	<u>373</u>	<u>28.1</u>
456.hammer	149	62.7	<u>148</u>	<u>63.1</u>	148	63.2	<u>148</u>	<u>63.1</u>	148	63.0	148	63.1
458.sjeng	415	29.2	<u>416</u>	<u>29.1</u>	416	29.1	<u>406</u>	<u>29.8</u>	405	29.9	406	29.8
462.libquantum	5.32	3890	<u>5.32</u>	<u>3890</u>	5.32	3890	5.32	3890	<u>5.32</u>	<u>3890</u>	5.32	3890
464.h264ref	418	52.9	<u>418</u>	<u>52.9</u>	418	53.0	365	60.6	<u>365</u>	<u>60.7</u>	365	60.7
471.omnetpp	252	24.8	<u>251</u>	<u>24.9</u>	251	24.9	187	33.5	<u>189</u>	<u>33.1</u>	189	33.1
473.astar	214	32.8	215	32.7	<u>214</u>	<u>32.8</u>	214	32.8	215	32.7	<u>214</u>	<u>32.8</u>
483.xalancbmk	121	56.9	122	56.5	<u>122</u>	<u>56.7</u>	119	58.1	<u>119</u>	<u>58.1</u>	119	58.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```

Virtualization Technology disabled
Execute Disable disabled
Logical Processor enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost enabled
C1E enabled
C States enabled
Monitor/Mwait enabled
Memory Patrol Scrub set to disabled
Memory Refresh Rate set to 1x
Memory Operating Voltage set to Auto
Collaborative CPU Performance Control disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Mon Mar 3 12:30:03 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECint_base2006 = 55.1

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Platform Notes (Continued)

model name : Intel(R) Xeon(R) CPU E5-4627 v2 @ 3.30GHz

4 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

physical 2: cores 0 1 2 3 4 5 6 7

physical 3: cores 0 1 2 3 4 5 6 7

cache size : 16384 KB

From /proc/meminfo

MemTotal: 529392220 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 11 (x86_64)

VERSION = 11

PATCHLEVEL = 3

uname -a:

Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 3 12:29 last=S

SPEC is set to: /root/cpu2006-1.2

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 ext2 909G 7.8G 900G 1% /

Additional information from dmidecode:

BIOS Dell Inc. 2.0.24 01/21/2014

Memory:

8x 002C04B3002C 36JSF2G72PZ-1G9E1 16 GB 1866 MHz

21x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1866 MHz

3x 00CE04B300CE M393B2G70DB0-CMA 16 GB 1866 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECint_base2006 = 55.1

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "32"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4627 v2,
3.30 GHz)

SPECint2006 = 58.8

SPECint_base2006 = 55.1

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECint_base2006 = 55.1

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Peak Optimization Flags (Continued)

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4627 v2,
3.30 GHz)

SPECint2006 = 58.8

SPECint_base2006 = 55.1

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:44:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2014.