



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp<sup>®</sup>\_rate2006 = 766

SPECfp\_rate\_base2006 = 750

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

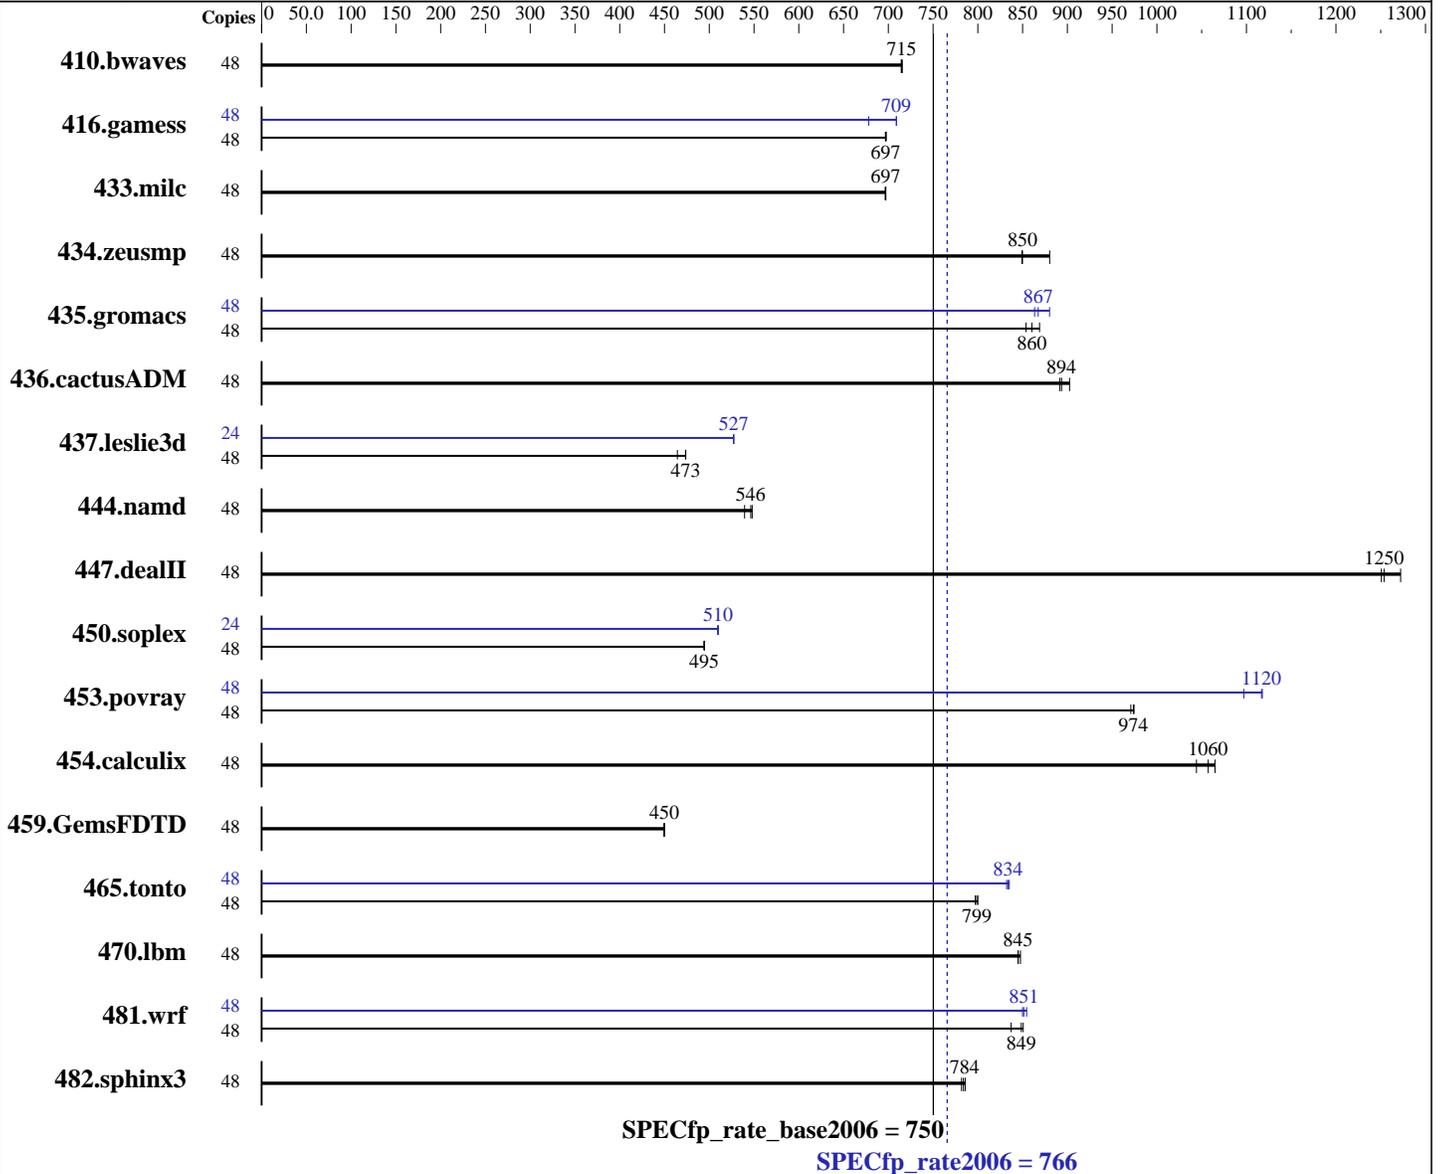

### Hardware

CPU Name: Intel Xeon E5-4607 v2  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp\_rate2006 = 766

SPECfp\_rate\_base2006 = 750

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 1TB 7200 RPM Near-Line SAS  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	913	715	<u>913</u>	<u>715</u>	912	716	48	913	715	<u>913</u>	<u>715</u>	912	716
416.gamess	48	1347	698	<u>1348</u>	<u>697</u>	1349	697	48	1326	709	1386	678	<u>1326</u>	<u>709</u>
433.milc	48	633	696	632	697	<u>632</u>	<u>697</u>	48	633	696	632	697	<u>632</u>	<u>697</u>
434.zeusmp	48	496	880	<u>514</u>	<u>850</u>	514	849	48	496	880	<u>514</u>	<u>850</u>	514	849
435.gromacs	48	394	869	<u>398</u>	<u>860</u>	401	854	48	389	880	<u>395</u>	<u>867</u>	397	863
436.cactusADM	48	<u>642</u>	<u>894</u>	636	902	643	892	48	<u>642</u>	<u>894</u>	636	902	643	892
437.leslie3d	48	972	464	952	474	<u>953</u>	<u>473</u>	24	428	527	<u>428</u>	<u>527</u>	428	527
444.namd	48	703	548	714	539	<u>705</u>	<u>546</u>	48	703	548	714	539	<u>705</u>	<u>546</u>
447.dealII	48	432	1270	439	1250	<u>438</u>	<u>1250</u>	48	432	1270	439	1250	<u>438</u>	<u>1250</u>
450.soplex	48	809	495	<u>809</u>	<u>495</u>	810	494	24	393	509	392	510	<u>393</u>	<u>510</u>
453.povray	48	263	971	262	974	<u>262</u>	<u>974</u>	48	228	1120	<u>229</u>	<u>1120</u>	233	1100
454.calculix	48	372	1060	<u>375</u>	<u>1060</u>	379	1040	48	372	1060	<u>375</u>	<u>1060</u>	379	1040
459.GemsFDTD	48	1132	450	<u>1132</u>	<u>450</u>	1133	449	48	1132	450	<u>1132</u>	<u>450</u>	1133	449
465.tonto	48	593	797	<u>591</u>	<u>799</u>	590	800	48	566	835	<u>566</u>	<u>834</u>	568	832
470.lbm	48	778	848	<u>780</u>	<u>845</u>	781	845	48	778	848	<u>780</u>	<u>845</u>	781	845
481.wrf	48	<u>632</u>	<u>849</u>	630	851	640	837	48	627	855	<u>630</u>	<u>851</u>	631	850
482.sphinx3	48	1190	786	<u>1193</u>	<u>784</u>	1197	782	48	1190	786	<u>1193</u>	<u>784</u>	1197	782

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Virtualization Technology disabled  
Execute Disable disabled  
Logical Processor enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 766**

PowerEdge M820 (Intel Xeon E5-4607 v2, 2.60 GHz)

**SPECfp\_rate\_base2006 = 750**

**CPU2006 license:** 55

**Test date:** Feb-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

System Profile set to Performance  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on linux Sun Feb 16 01:47:43 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-4607 v2 @ 2.60GHz
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 6
siblings       : 12
physical 0:    : cores 0 1 2 3 4 5
physical 1:    : cores 0 1 2 3 4 5
physical 2:    : cores 0 1 2 3 4 5
physical 3:    : cores 0 1 2 3 4 5
cache size     : 15360 KB
```

```
From /proc/meminfo
MemTotal:      529392220 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 15 12:58 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  909G  49G  859G   6% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 2.0.24 01/21/2014
Memory:
8x 002C04B3002C 36JSF2G72PZ-1G9E1 16 GB 1333 MHz
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 766**

PowerEdge M820 (Intel Xeon E5-4607 v2,  
2.60 GHz)

**SPECfp\_rate\_base2006 = 750**

**CPU2006 license:** 55

**Test date:** Feb-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

21x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1333 MHz  
3x 00CE04B300CE M393B2G70DB0-CMA 16 GB 1333 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M820 (Intel Xeon E5-4607 v2,  
2.60 GHz)

**SPECfp\_rate2006 = 766**

**SPECfp\_rate\_base2006 = 750**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 766**

PowerEdge M820 (Intel Xeon E5-4607 v2,  
2.60 GHz)

**SPECfp\_rate\_base2006 = 750**

**CPU2006 license:** 55

**Test date:** Feb-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M820 (Intel Xeon E5-4607 v2,  
2.60 GHz)

**SPECfp\_rate2006 = 766**

**SPECfp\_rate\_base2006 = 750**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:33:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 April 2014.