



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

**SPECint®2006 = 56.1**

Compute Blade 2000 (Intel Xeon E5-2670 v2)

**SPECint\_base2006 = 51.8**

CPU2006 license: 35


Test date: Mar-2014

Test sponsor: HITACHI

Hardware Availability: Nov-2013

Tested by: HITACHI

Software Availability: Sep-2013

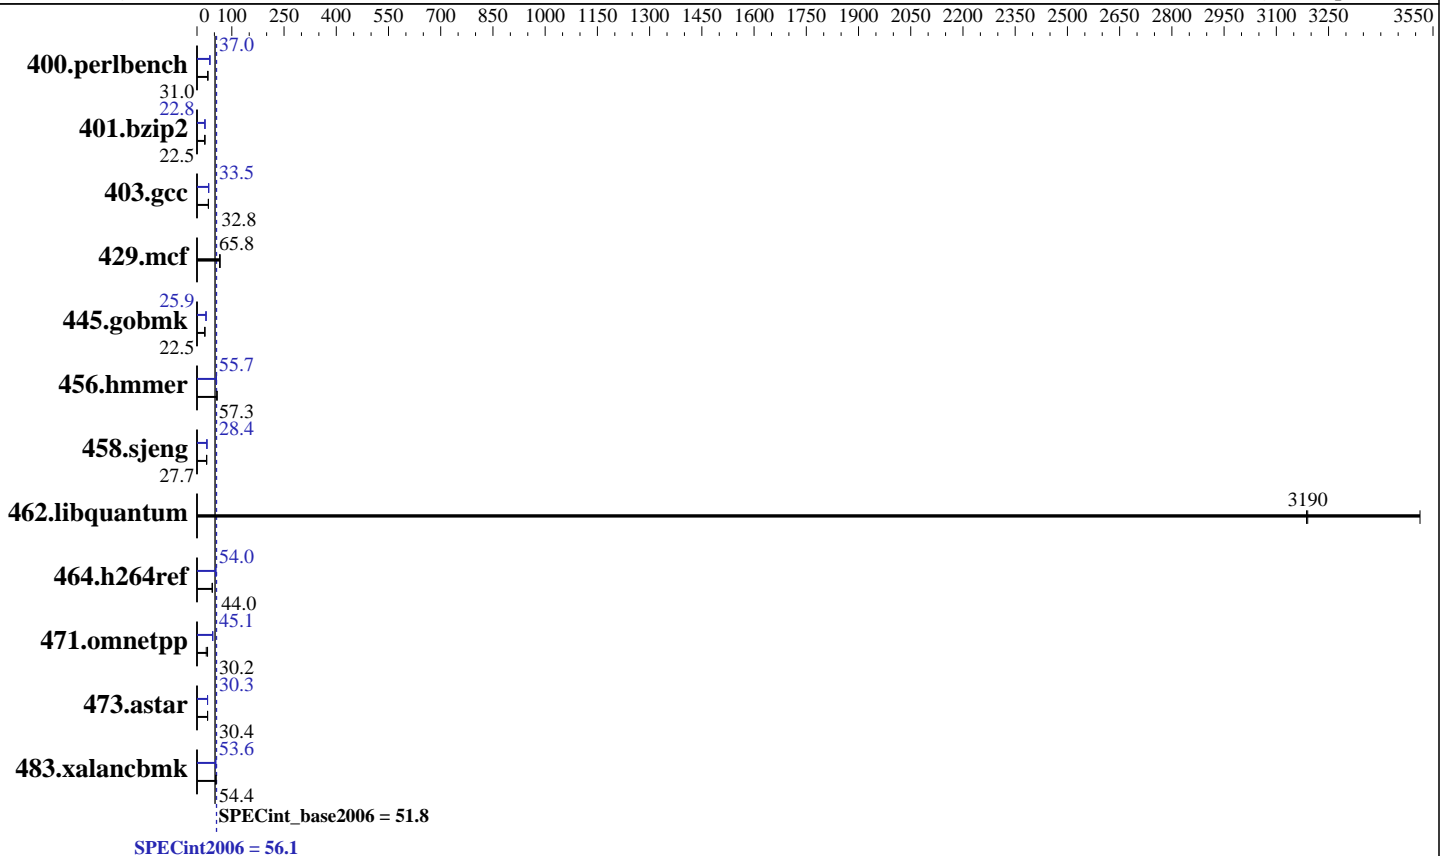

### Hardware

CPU Name: Intel Xeon E5-2670 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)

Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.23.2.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint2006 = **56.1**

Compute Blade 2000 (Intel Xeon E5-2670 v2)

SPECint\_base2006 = **51.8**

CPU2006 license: 35  
Test sponsor: HITACHI  
Tested by: HITACHI

Test date: Mar-2014  
Hardware Availability: Nov-2013  
Software Availability: Sep-2013

### Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	313	31.2	<b>315</b>	<b>31.0</b>	315	31.0	265	36.8	<b>264</b>	<b>37.0</b>	264	37.1
401.bzip2	428	22.5	429	22.5	<b>429</b>	<b>22.5</b>	<b>423</b>	<b>22.8</b>	423	22.8	423	22.8
403.gcc	246	32.8	245	32.8	<b>245</b>	<b>32.8</b>	<b>240</b>	<b>33.5</b>	240	33.5	241	33.4
429.mcf	<b>139</b>	<b>65.8</b>	140	65.0	138	66.2	<b>139</b>	<b>65.8</b>	140	65.0	138	66.2
445.gobmk	<b>467</b>	<b>22.5</b>	465	22.6	468	22.4	404	25.9	<b>405</b>	<b>25.9</b>	405	25.9
456.hammer	162	57.5	<b>163</b>	<b>57.3</b>	163	57.2	<b>167</b>	<b>55.7</b>	168	55.6	167	55.8
458.sjeng	437	27.7	<b>437</b>	<b>27.7</b>	437	27.7	<b>425</b>	<b>28.4</b>	425	28.4	426	28.4
462.libquantum	<b>6.49</b>	<b>3190</b>	6.50	3190	5.90	3510	<b>6.49</b>	<b>3190</b>	6.50	3190	5.90	3510
464.h264ref	505	43.9	503	44.0	<b>503</b>	<b>44.0</b>	410	54.0	411	53.8	<b>410</b>	<b>54.0</b>
471.omnetpp	<b>207</b>	<b>30.2</b>	235	26.6	206	30.3	138	45.2	<b>139</b>	<b>45.1</b>	139	45.0
473.astar	<b>231</b>	<b>30.4</b>	232	30.3	231	30.4	232	30.3	231	30.4	<b>232</b>	<b>30.3</b>
483.xalancbmk	127	54.2	<b>127</b>	<b>54.4</b>	127	54.4	128	53.8	129	53.6	<b>129</b>	<b>53.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on DPx4-SPECCPU Fri Mar 14 22:42:04 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

**SPECint2006 = 56.1**

Compute Blade 2000 (Intel Xeon E5-2670 v2)

**SPECint\_base2006 = 51.8**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

### Platform Notes (Continued)

cache size : 25600 KB

From /proc/meminfo

MemTotal: 132193392 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux DPx4-SPECCPU 2.6.32-358.23.2.el6.x86\_64 #1 SMP Sat Sep 14 05:32:37 EDT 2013 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 12 11:36

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/vg_dp4speccpu-lv_home	ext4	81G	5.3G	72G	7%	/home

Additional information from dmidecode:

BIOS American Megatrends Inc. 4.6.5 11/28/2013

Memory:

16x None None

8x Sams M393 16 GB 1866 MHz 1 rank

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY="granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

BladeSymphony BS2000 and Hitachi Compute Blade 2000 are electronically equivalent.

The results have been measured on a BladeSymphony BS2000



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint2006 = 56.1**

**Compute Blade 2000 (Intel Xeon E5-2670 v2)**

**SPECint\_base2006 = 51.8**

**CPU2006 license:** 35

**Test date:** Mar-2014

**Test sponsor:** HITACHI

**Hardware Availability:** Nov-2013

**Tested by:** HITACHI

**Software Availability:** Sep-2013

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint2006 = 56.1**

**Compute Blade 2000 (Intel Xeon E5-2670 v2)**

**SPECint\_base2006 = 51.8**

**CPU2006 license:** 35

**Test date:** Mar-2014

**Test sponsor:** HITACHI

**Hardware Availability:** Nov-2013

**Tested by:** HITACHI

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias`

456.hmmer: `-xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

**SPECint2006 = 56.1**

Compute Blade 2000 (Intel Xeon E5-2670 v2)

**SPECint\_base2006 = 51.8**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:29:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 June 2014.