



SPEC® CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Huawei CH121

SPECint®2006 = 50.4
SPECint_base2006 = 46.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

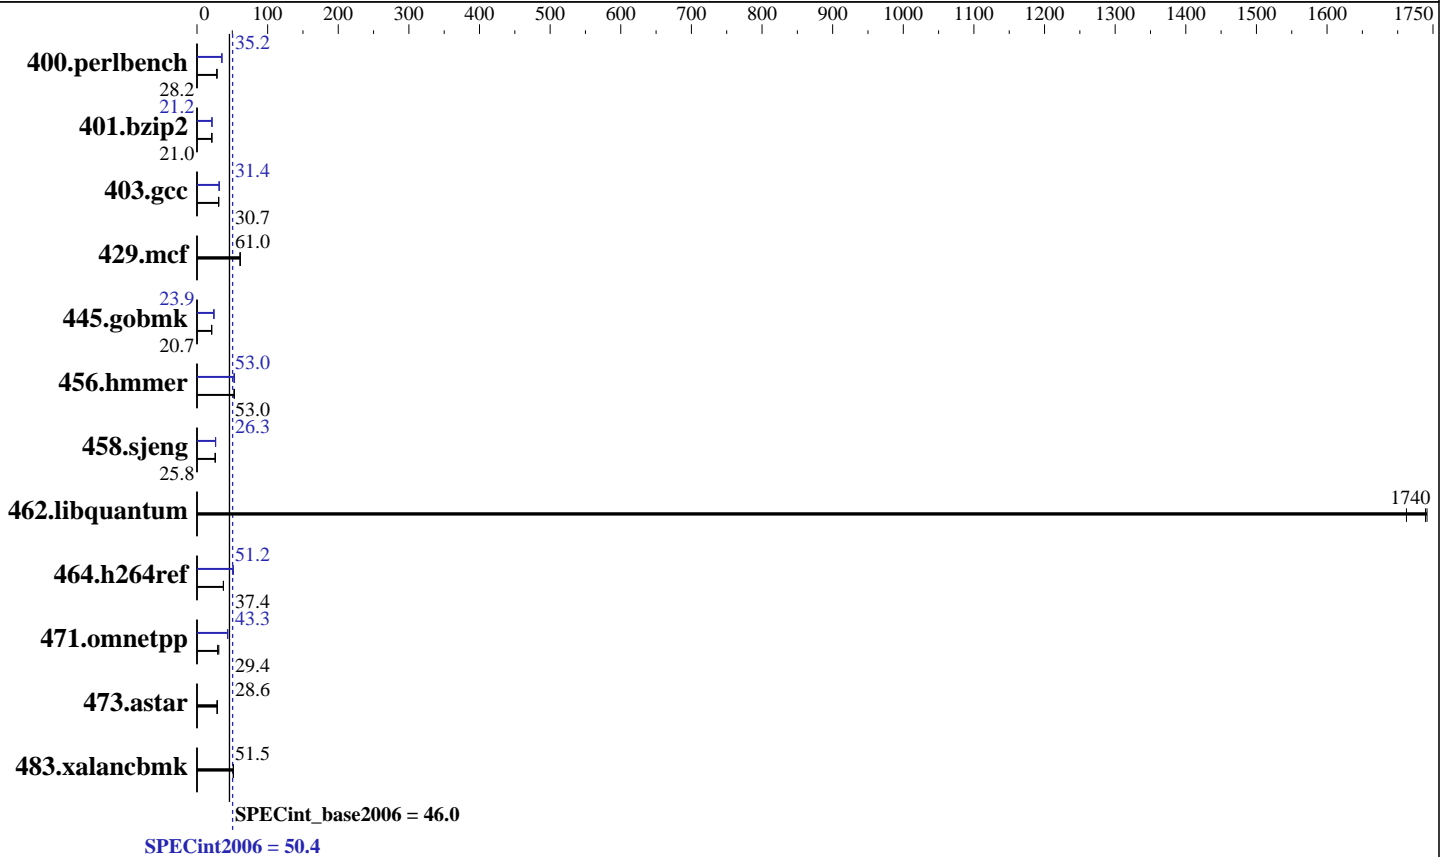

Hardware

CPU Name: Intel Xeon E5-2658 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 X 300 GB SATA 7200RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei CH121

SPECint2006 = 50.4
SPECint_base2006 = 46.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	347	28.2	346	28.2	<u>346</u>	<u>28.2</u>	278	35.1	277	35.3	<u>277</u>	<u>35.2</u>
401.bzip2	460	21.0	460	21.0	<u>460</u>	<u>21.0</u>	457	21.1	<u>456</u>	<u>21.2</u>	455	21.2
403.gcc	<u>262</u>	<u>30.7</u>	262	30.7	263	30.6	256	31.4	<u>256</u>	<u>31.4</u>	257	31.4
429.mcf	150	61.0	149	61.3	<u>149</u>	<u>61.0</u>	150	61.0	149	61.3	<u>149</u>	<u>61.0</u>
445.gobmk	<u>506</u>	<u>20.7</u>	503	20.8	507	20.7	439	23.9	438	23.9	<u>438</u>	<u>23.9</u>
456.hammer	<u>176</u>	<u>53.0</u>	179	52.2	176	53.0	176	53.1	<u>176</u>	<u>53.0</u>	179	52.2
458.sjeng	468	25.8	468	25.8	<u>468</u>	<u>25.8</u>	459	26.3	<u>460</u>	<u>26.3</u>	460	26.3
462.libquantum	11.9	1740	12.1	1710	<u>11.9</u>	<u>1740</u>	11.9	1740	12.1	1710	<u>11.9</u>	<u>1740</u>
464.h264ref	<u>592</u>	<u>37.4</u>	592	37.4	591	37.4	434	51.0	<u>433</u>	<u>51.2</u>	432	51.2
471.omnetpp	<u>212</u>	<u>29.4</u>	213	29.3	202	30.9	144	43.3	144	43.5	<u>144</u>	<u>43.3</u>
473.astar	<u>245</u>	<u>28.6</u>	245	28.7	246	28.5	<u>245</u>	<u>28.6</u>	245	28.7	246	28.5
483.xalancbmk	<u>134</u>	<u>51.5</u>	134	51.5	134	51.5	<u>134</u>	<u>51.5</u>	134	51.5	134	51.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Intel HT Technology to Disable

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on localhost.localdomain Mon May 5 08:50:38 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2658 v2 @ 2.40GHz

2 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 10

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Huawei CH121	SPECint2006 =	50.4
	SPECint_base2006 =	46.0

CPU2006 license: 3175	Test date:	Mar-2014
Test sponsor: Huawei	Hardware Availability:	Sep-2013
Tested by: Huawei	Software Availability:	Nov-2013

Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      264480104 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 5 08:48

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  265G  109G  143G  44% /

Additional information from dmidecode:
BIOS Insyde Corp. OARYV388 04/23/2014
Memory:
16x Micron 36JSF2G72PZ-1G9E1 16 GB 1866 MHz 2 rank
8x NO DIMM NO DIMM

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei CH121

SPECint2006 = 50.4
SPECint_base2006 = 46.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32
445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Huawei CH121	SPECint2006 =	50.4
	SPECint_base2006 =	46.0

CPU2006 license: 3175	Test date:	Mar-2014
Test sponsor: Huawei	Hardware Availability:	Sep-2013
Tested by: Huawei	Software Availability:	Nov-2013

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Huawei CH121	SPECint2006 =	50.4
	SPECint_base2006 =	46.0

CPU2006 license: 3175	Test date:	Mar-2014
Test sponsor: Huawei	Hardware Availability:	Sep-2013
Tested by: Huawei	Software Availability:	Nov-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:01:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 May 2014.