



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 62.7

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint_base2006 = 60.2

CPU2006 license: 3


Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

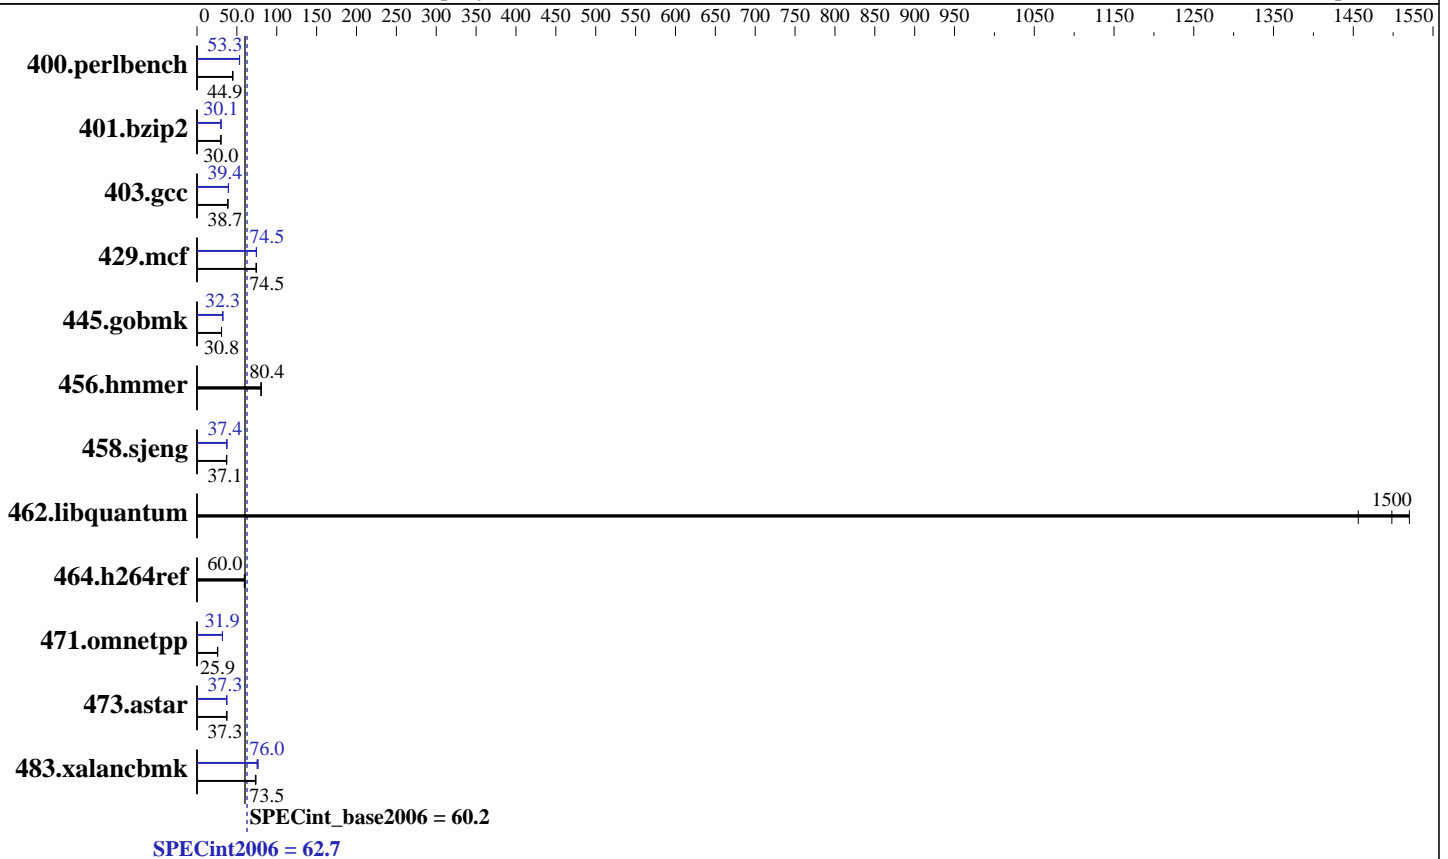

Hardware

CPU Name: Intel Xeon E3-1280 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 300 GB 15 K SAS, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
 Kernel 3.0.76-0.11-default
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **62.7**

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint_base2006 = **60.2**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	219	44.7	<u>218</u>	<u>44.9</u>	218	44.9	183	53.4	183	53.3	<u>183</u>	<u>53.3</u>
401.bzip2	323	29.9	<u>322</u>	<u>30.0</u>	321	30.0	<u>320</u>	<u>30.1</u>	320	30.1	321	30.1
403.gcc	<u>208</u>	<u>38.7</u>	209	38.6	208	38.7	205	39.3	203	39.6	<u>204</u>	<u>39.4</u>
429.mcf	123	74.0	<u>122</u>	<u>74.5</u>	122	74.7	123	74.4	122	74.6	<u>122</u>	<u>74.5</u>
445.gobmk	341	30.8	<u>341</u>	<u>30.8</u>	341	30.8	324	32.3	325	32.3	<u>324</u>	<u>32.3</u>
456.hammer	116	80.4	<u>116</u>	<u>80.4</u>	116	80.3	116	80.4	<u>116</u>	<u>80.4</u>	116	80.3
458.sjeng	326	37.1	326	37.2	<u>326</u>	<u>37.1</u>	324	37.4	<u>323</u>	<u>37.4</u>	323	37.5
462.libquantum	<u>13.8</u>	<u>1500</u>	13.6	1520	14.2	1460	<u>13.8</u>	<u>1500</u>	13.6	1520	14.2	1460
464.h264ref	373	59.3	369	60.0	<u>369</u>	<u>60.0</u>	373	59.3	369	60.0	<u>369</u>	<u>60.0</u>
471.omnetpp	243	25.7	241	26.0	<u>241</u>	<u>25.9</u>	197	31.8	196	32.0	<u>196</u>	<u>31.9</u>
473.astar	187	37.5	<u>188</u>	<u>37.3</u>	189	37.2	188	37.4	<u>188</u>	<u>37.3</u>	188	37.3
483.xalancbmk	94.2	73.3	<u>93.9</u>	<u>73.5</u>	93.3	73.9	91.6	75.3	90.0	76.7	<u>90.8</u>	<u>76.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Maximum Performance
Minimum Processor Idle Power Core State set to C6 State
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on XL220a-Gen8-v2 Thu May 15 20:19:27 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 62.7

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint_base2006 = 60.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Sep-2013

Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E3-1280 v3 @ 3.60GHz
    1 "physical id"s (chips)
    4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

From /proc/meminfo
MemTotal:      32839564 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 3

uname -a:
  Linux XL220a-Gen8-v2 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
  (ccab990) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 15 20:11 last=S

SPEC is set to: /cpu2006
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda3       ext3  271G  9.0G  261G   4% /

Additional information from dmidecode:
  BIOS HP P94 04/29/2014
  Memory:
    4x HP 669239-081 8 GB 1600 MHz

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
 OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 62.7

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint_base2006 = 60.2

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

General Notes (Continued)

memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 62.7

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint_base2006 = 60.2

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 62.7

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint_base2006 = 60.2

CPU2006 license: 3

Test date: May-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmcr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant XL220a Gen8 v2
(3.60 GHz, Intel Xeon E3-1280 v3)

SPECint2006 = 62.7

SPECint_base2006 = 60.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:53:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2014.