



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation
Forward! 2100 (16-core partition)

SPECint®_rate2006 = 696
SPECint_rate_base2006 = 676

CPU2006 license: 15


Test sponsor: Unisys Corporation

Tested by: Unisys Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Jun-2014

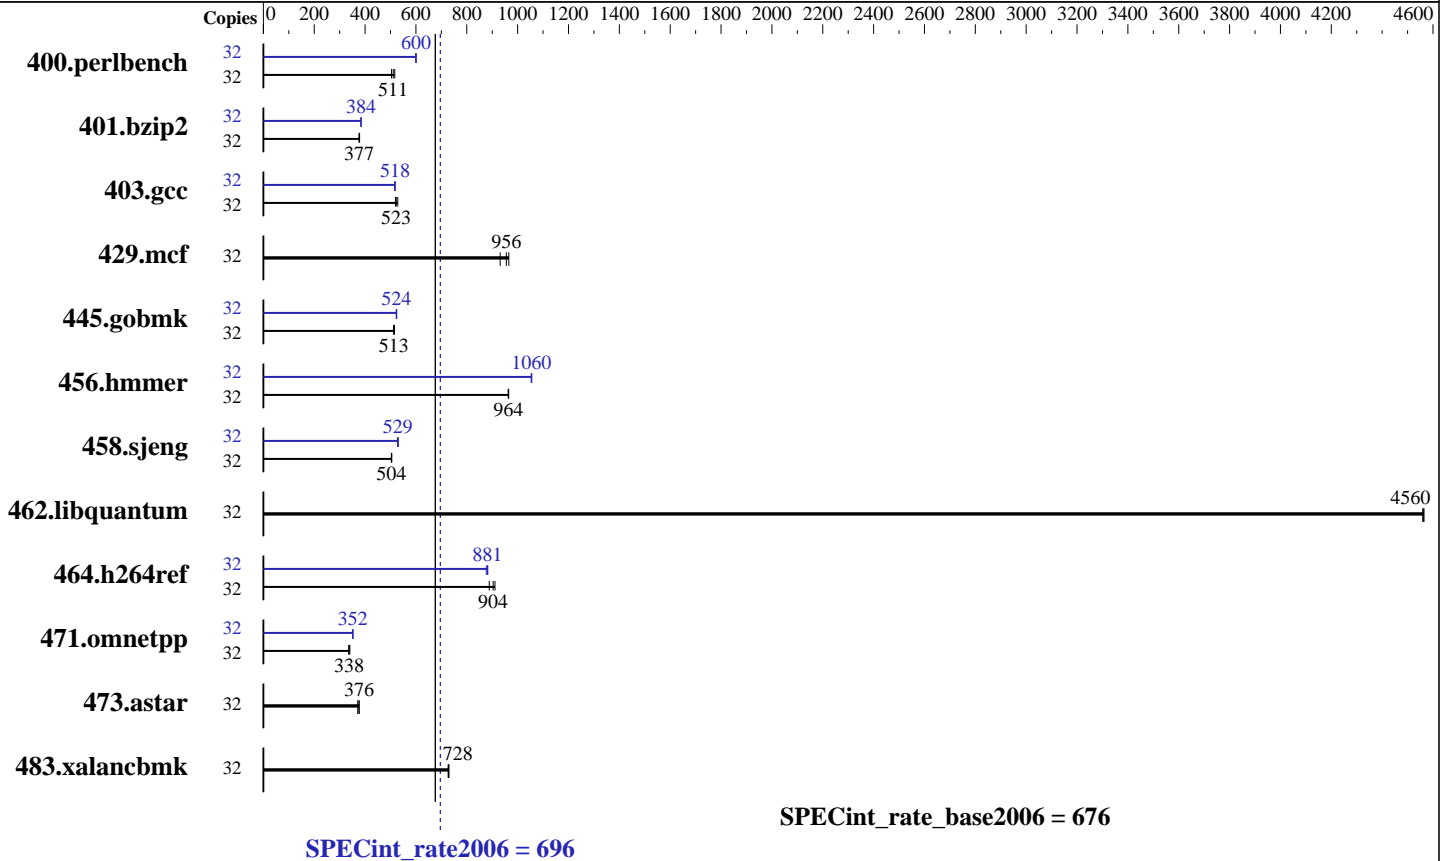

Hardware

CPU Name: Intel Xeon E5-2690 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-12800R-11, ECC) 96 GB allocated to partition
 Disk Subsystem: 8 x 600 GB 15K SAS RAID-DP
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint_rate2006 = 696

Forward! 2100 (16-core partition)

SPECint_rate_base2006 = 676

CPU2006 license: 15

Test sponsor: Unisys Corporation

Tested by: Unisys Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Jun-2014

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	605	517	612	511	620	504	32	520	601	521	600	522	599		
401.bzip2	32	816	378	821	376	819	377	32	804	384	803	385	805	384		
403.gcc	32	487	529	493	523	496	519	32	499	516	497	518	497	518		
429.mcf	32	302	965	313	931	305	956	32	302	965	313	931	305	956		
445.gobmk	32	654	513	656	512	651	516	32	641	524	643	522	640	524		
456.hammer	32	310	964	310	963	309	965	32	283	1060	283	1050	283	1060		
458.sjeng	32	769	503	767	505	769	504	32	729	531	732	529	734	527		
462.libquantum	32	145	4560	145	4560	145	4560	32	145	4560	145	4560	145	4560		
464.h264ref	32	777	911	784	904	797	888	32	808	877	803	881	802	883		
471.omnetpp	32	588	340	593	338	596	336	32	568	352	569	352	568	352		
473.aster	32	597	376	606	371	597	377	32	597	376	606	371	597	377		
483.xalancbmk	32	302	730	303	728	304	727	32	302	730	303	728	304	727		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /opt/cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ f4f716b9827353cbfdded47e832667cd7
running on SPEC-AXL2 Tue May 20 12:01:21 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation
Forward! 2100 (16-core partition)

SPECint_rate2006 = 696

SPECint_rate_base2006 = 676

CPU2006 license: 15
Test sponsor: Unisys Corporation
Tested by: Unisys Corporation

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Jun-2014

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      98984280 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux SPEC-AXL2 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 20 11:56 last=S
```

```
SPEC is set to: /opt/cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  296G   49G  246G  17% /opt/cpu2006.1.2
```

(End of data from sysinfo program)

Reporting on a 16-core, 96GB partition using
Unisys' Secure Partitioning - s-Par(R) from a 20-core, 128GB system

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006.1.2/libs/32:/opt/cpu2006.1.2/libs/64:/opt/cpu2006.1.2/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint_rate2006 = 696

Forward! 2100 (16-core partition)

SPECint_rate_base2006 = 676

CPU2006 license: 15

Test date: May-2014

Test sponsor: Unisys Corporation

Hardware Availability: Jun-2014

Tested by: Unisys Corporation

Software Availability: Jun-2014

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint_rate2006 = 696

Forward! 2100 (16-core partition)

SPECint_rate_base2006 = 676

CPU2006 license: 15

Test date: May-2014

Test sponsor: Unisys Corporation

Hardware Availability: Jun-2014

Tested by: Unisys Corporation

Software Availability: Jun-2014

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint_rate2006 = 696

Forward! 2100 (16-core partition)

SPECint_rate_base2006 = 676

CPU2006 license: 15

Test date: May-2014

Test sponsor: Unisys Corporation

Hardware Availability: Jun-2014

Tested by: Unisys Corporation

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Unisys-Platform-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Unisys-Platform-Settings-V1.2-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:46:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2014.