



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13


Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

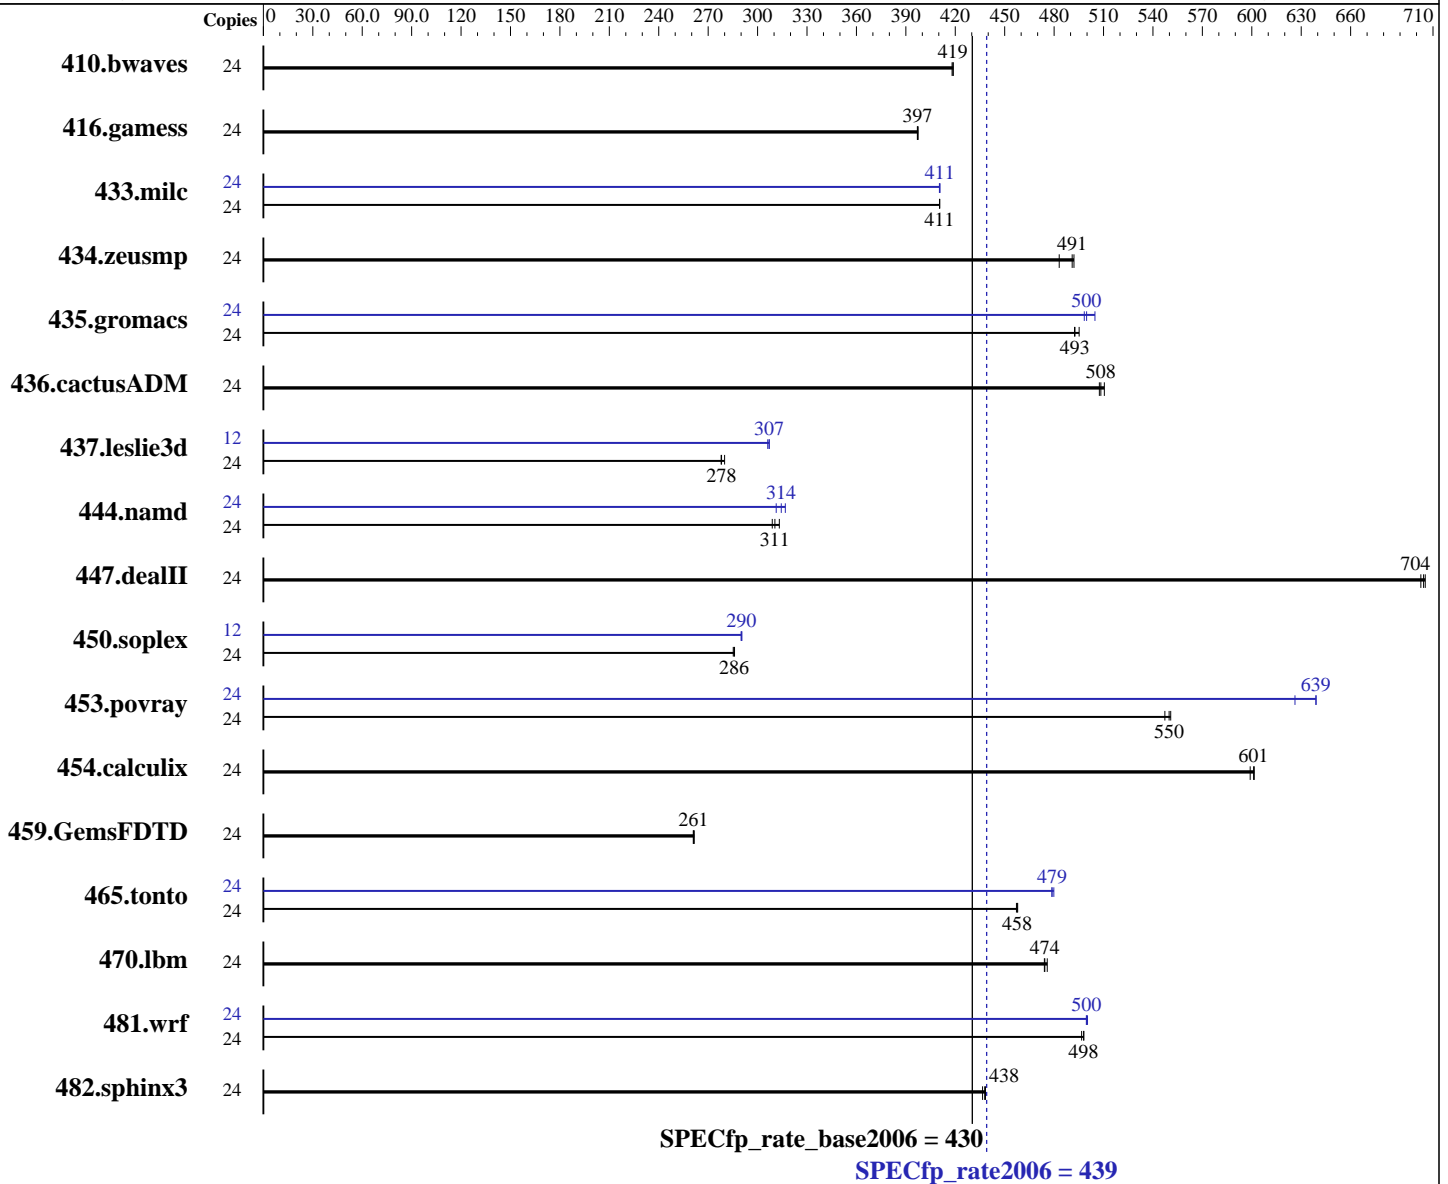

### Hardware

CPU Name: Intel Xeon E5-2630 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	779	419	780	418	<u>779</u>	<u>419</u>	24	779	419	780	418	<u>779</u>	<u>419</u>
416.gamess	24	1184	397	<u>1183</u>	<u>397</u>	1182	397	24	1184	397	<u>1183</u>	<u>397</u>	1182	397
433.milc	24	537	410	<u>537</u>	<u>411</u>	537	411	24	537	410	536	411	<u>537</u>	<u>411</u>
434.zeusmp	24	444	492	452	483	<u>445</u>	<u>491</u>	24	444	492	452	483	<u>445</u>	<u>491</u>
435.gromacs	24	<u>348</u>	<u>493</u>	346	495	348	492	24	339	505	<u>343</u>	<u>500</u>	344	498
436.cactusADM	24	<u>564</u>	<u>508</u>	565	507	562	510	24	<u>564</u>	<u>508</u>	565	507	562	510
437.leslie3d	24	812	278	806	280	<u>811</u>	<u>278</u>	12	<u>367</u>	<u>307</u>	367	307	368	306
444.namd	24	615	313	623	309	<u>620</u>	<u>311</u>	24	<u>612</u>	<u>314</u>	608	317	618	311
447.dealII	24	391	703	<u>390</u>	<u>704</u>	389	705	24	391	703	<u>390</u>	<u>704</u>	389	705
450.soplex	24	702	285	<u>701</u>	<u>286</u>	700	286	12	<u>345</u>	<u>290</u>	345	290	345	290
453.povray	24	<u>232</u>	<u>550</u>	232	551	233	547	24	204	626	200	639	<u>200</u>	<u>639</u>
454.calculix	24	<u>329</u>	<u>601</u>	331	599	329	602	24	<u>329</u>	<u>601</u>	331	599	329	602
459.GemsFDTD	24	974	262	<u>975</u>	<u>261</u>	976	261	24	974	262	<u>975</u>	<u>261</u>	976	261
465.tonto	24	<u>516</u>	<u>458</u>	517	457	516	458	24	<u>493</u>	<u>479</u>	493	479	492	480
470.lbm	24	696	474	693	476	<u>695</u>	<u>474</u>	24	696	474	693	476	<u>695</u>	<u>474</u>
481.wrf	24	538	498	<u>538</u>	<u>498</u>	540	497	24	536	500	537	500	<u>536</u>	<u>500</u>
482.sphinx3	24	<u>1068</u>	<u>438</u>	1067	438	1071	437	24	<u>1068</u>	<u>438</u>	1067	438	1071	437

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /spec/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost Sat Apr 5 04:05:55 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264478184 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 4 16:49
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  272G  31G  227G  12% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV608 02/10/2014
Memory:
13x Hynix HMT42GR7AFR4C-RD 16 GB 1600 MHz 2 rank
8x NO DIMM NO DIMM
3x Samsung M393B2G70DB0-CMA 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Huawei RH2288H v2 and Huawei RH2288 v2 and the Huawei RH1288 v2 models are electronically equivalent.  
The results have been measured on a Huawei RH2288H v2 model

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Portability Flags (Continued)

437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 439

Huawei RH1288 V2 (Intel Xeon E5-2630 V2)

SPECfp\_rate\_base2006 = 430

CPU2006 license: 13  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:48:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 June 2014.