



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp[®]_rate2006 = 2980

SPECfp_rate_base2006 = 2900

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

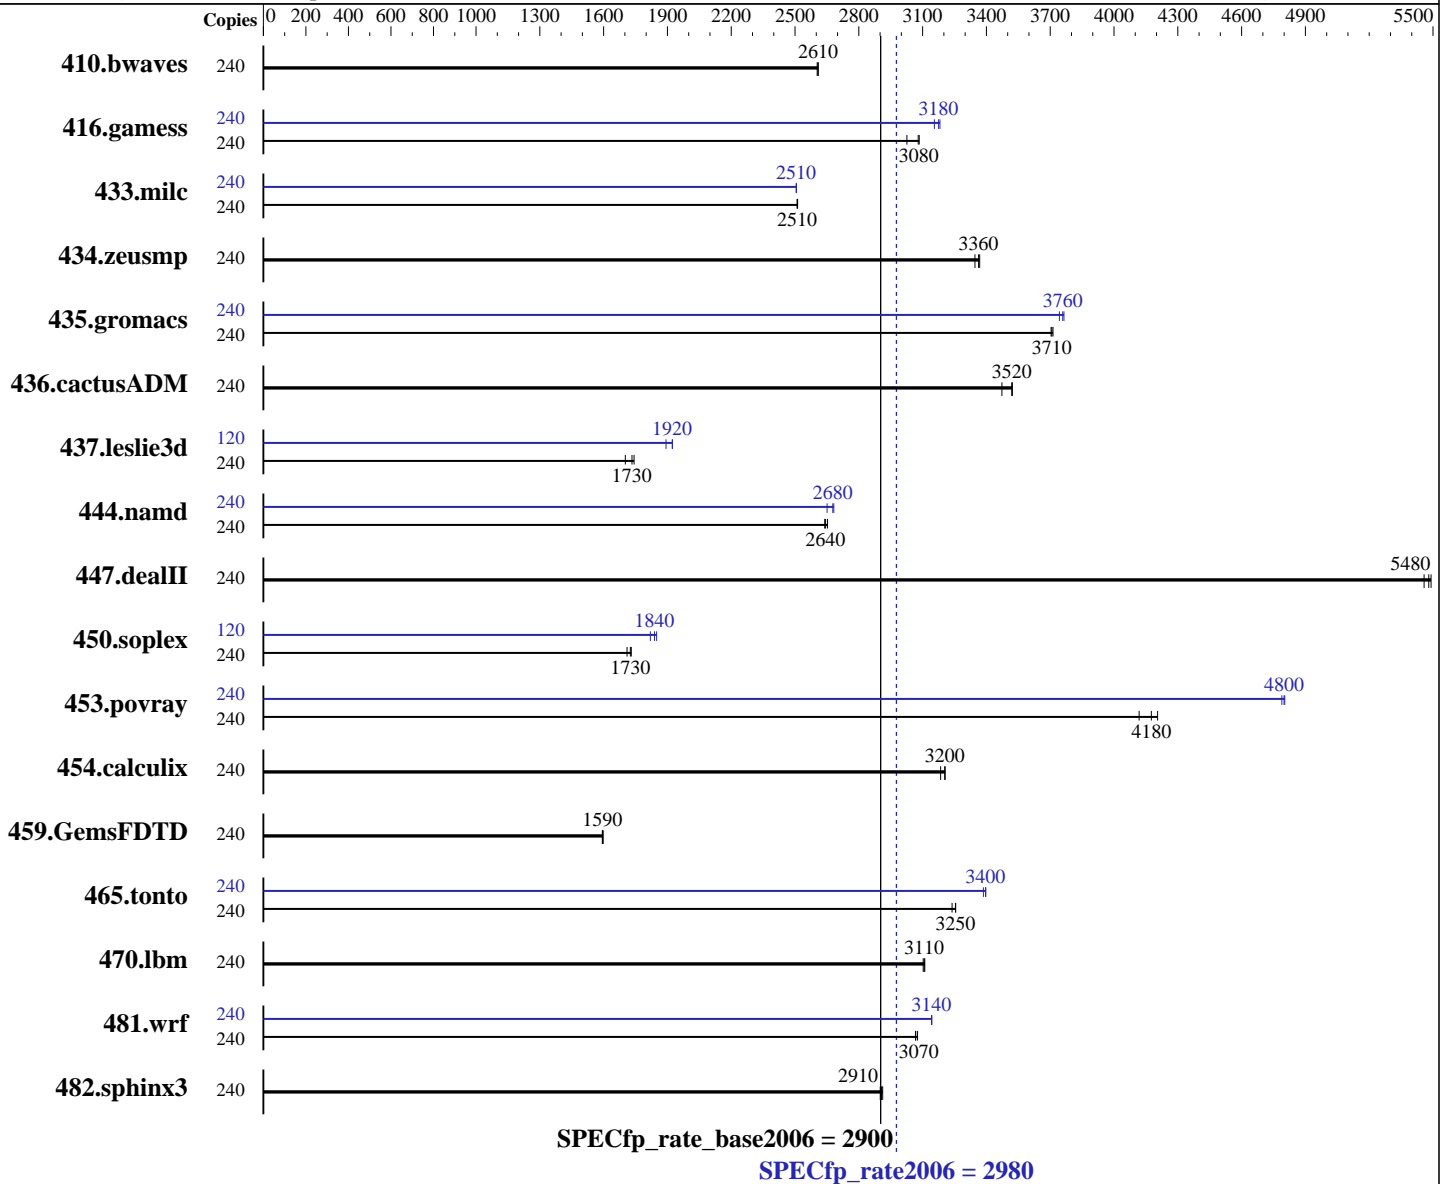

Hardware

CPU Name: Intel Xeon E7-8880L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 120 cores, 8 chips, 15 cores/chip, 2 threads/core
 CPU(s) orderable: 4,6,8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp_rate2006 = 2980

SPECfp_rate_base2006 = 2900

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

L3 Cache: 37.5 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 400 GB SATA, SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	240	1252	2600	1250	2610	1250	2610	240	1252	2600	1250	2610	1250	2610
416.gamess	240	1553	3030	1524	3080	1526	3080	240	1489	3160	1477	3180	1480	3180
433.milc	240	878	2510	877	2510	878	2510	240	879	2510	879	2510	879	2510
434.zeusmp	240	649	3360	653	3350	648	3370	240	649	3360	653	3350	648	3370
435.gromacs	240	462	3710	462	3710	463	3700	240	458	3740	456	3760	455	3760
436.cactusADM	240	815	3520	814	3520	826	3470	240	815	3520	814	3520	826	3470
437.leslie3d	240	1301	1730	1325	1700	1294	1740	120	596	1890	586	1920	587	1920
444.namd	240	726	2650	728	2640	729	2640	240	718	2680	726	2650	719	2680
447.dealII	240	503	5460	501	5480	500	5490	240	503	5460	501	5480	500	5490
450.soplex	240	1171	1710	1160	1730	1157	1730	120	550	1820	541	1850	544	1840
453.povray	240	310	4120	304	4200	306	4180	240	266	4800	267	4790	266	4800
454.calculix	240	618	3200	622	3180	618	3210	240	618	3200	622	3180	618	3210
459.GemsFDTD	240	1594	1600	1597	1590	1598	1590	240	1594	1600	1597	1590	1598	1590
465.tonto	240	725	3260	726	3250	729	3240	240	695	3400	695	3400	697	3390
470.lbm	240	1061	3110	1063	3100	1060	3110	240	1061	3110	1063	3100	1060	3110
481.wrf	240	874	3070	874	3070	871	3080	240	853	3140	853	3140	853	3140
482.sphinx3	240	1609	2910	1606	2910	1613	2900	240	1609	2910	1606	2910	1613	2900

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp_rate2006 = 2980

SPECfp_rate_base2006 = 2900

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Nov-2013

Platform Notes

Operating Mode set to Maximum Performance in BIOS
Memory Data Scrambling Disabled
Patrol Scrub Disabled
Sysinfo program /cpu2006.1.2_14_aug2013/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3950x6 Fri May 30 13:24:30 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E7-8880L v2 @ 2.20GHz
 8 "physical id"s (chips)
240 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 15
siblings       : 30
physical 0:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 4:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 5:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 6:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 7:    : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size     : 38400 KB
```

```
From /proc/meminfo
MemTotal:      2117446648 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3950x6 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 29 22:18
```

```
SPEC is set to: /cpu2006.1.2_14_aug2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3950x6-lv_root ext4 357G  8.5G 330G   3% /
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp_rate2006 = 2980

SPECfp_rate_base2006 = 2900

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Platform Notes (Continued)

Additional information from dmidecode:

BIOS IBM -[A8E107JUS-1.00]- 05/02/2014

Memory:

64x Hynix HMT42GR7AFR4A-PB 16 GB 1333 MHz 2 rank

64x NO DIMM Unknown

64x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank

(End of data from sysinfo program)

Memory speed from dmidecode lists the downclocked speed of the run.

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2_14_aug2013/libs/32:/cpu2006.1.2_14_aug2013/libs/64:/cpu2006.1.2_14_aug2013/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp_rate2006 = 2980

SPECfp_rate_base2006 = 2900

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2980

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp_rate_base2006 = 2900

CPU2006 license: 11

Test date: May-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp_rate2006 = 2980

SPECfp_rate_base2006 = 2900

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:45:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2014.