SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2 (Intel Xeon E5-2618L v2)

SPECint®2006 = 34.1

SPECint_base2006 = 32.6

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Dec-2014
Hardware Availability: Sep-2013
Software Availability: Sep-2014

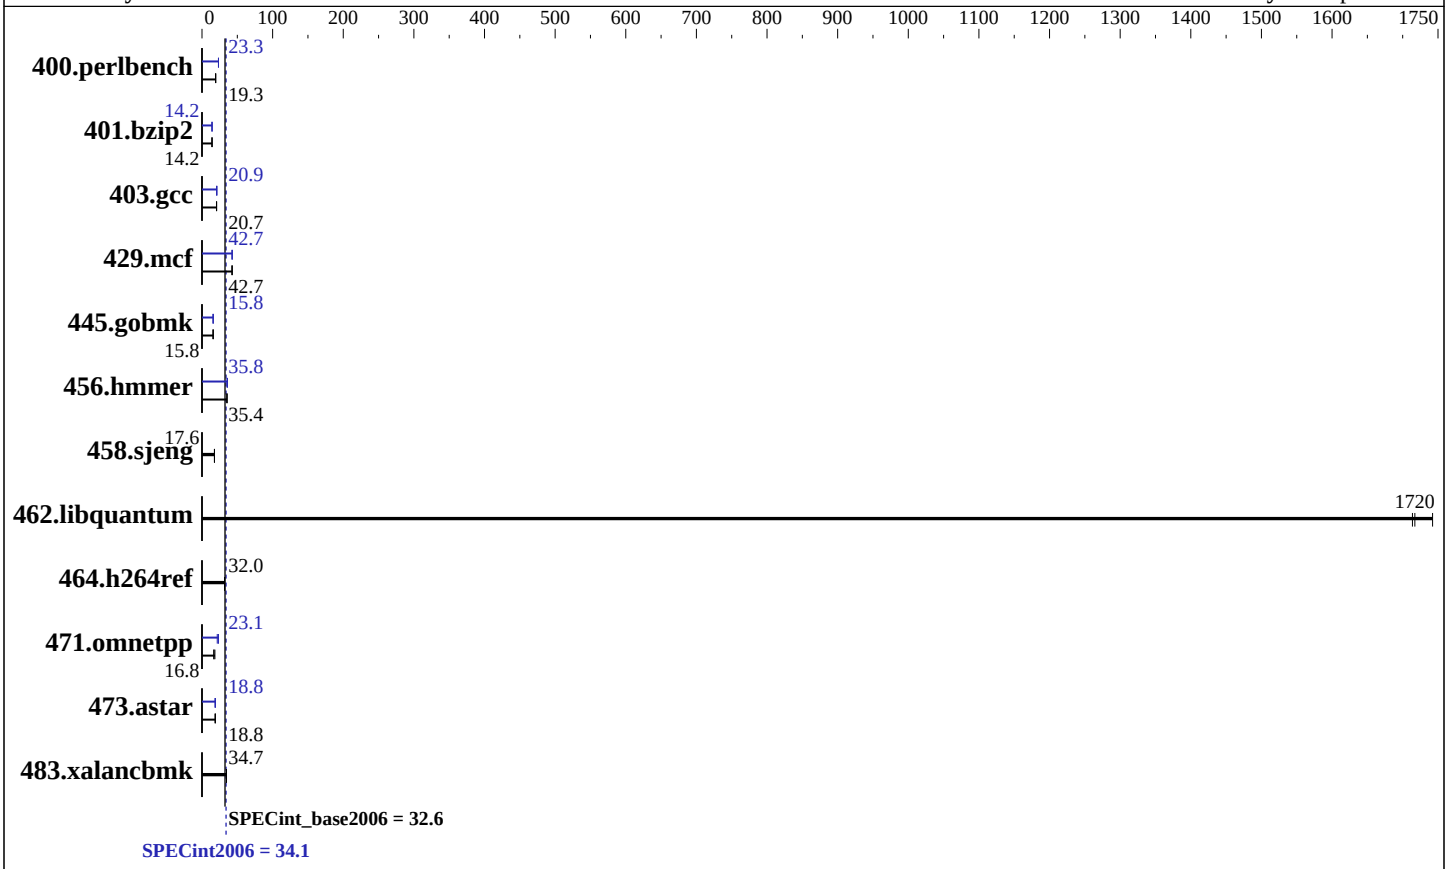

Hardware

CPU Name:	Intel Xeon E5-2618L v2
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 300 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2 (Intel Xeon E5-2618L v2)

SPECint2006 = 34.1

SPECint_base2006 = 32.6

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Dec-2014
Hardware Availability: Sep-2013
Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	506	19.3	**506**	**19.3**	504	19.4	419	23.3	419	23.3	**419**	**23.3**
401.bzip2	**680**	**14.2**	678	14.2	681	14.2	**679**	**14.2**	677	14.2	679	14.2
403.gcc	389	20.7	**390**	**20.7**	392	20.5	386	20.9	**385**	**20.9**	385	20.9
429.mcf	215	42.4	**214**	**42.7**	213	42.7	214	42.6	**213**	**42.7**	213	42.7
445.gobmk	665	15.8	**665**	**15.8**	664	15.8	663	15.8	665	15.8	**664**	**15.8**
456.hmmer	**264**	**35.4**	264	35.4	264	35.3	**261**	**35.8**	261	35.8	261	35.7
458.sjeng	686	17.6	685	17.7	**686**	**17.6**	686	17.6	685	17.7	**686**	**17.6**
462.libquantum	12.1	1710	11.9	1740	**12.1**	**1720**	12.1	1710	11.9	1740	**12.1**	**1720**
464.h264ref	691	32.0	**692**	**32.0**	692	32.0	691	32.0	**692**	**32.0**	692	32.0
471.omnetpp	**372**	**16.8**	342	18.3	373	16.8	270	23.1	**270**	**23.1**	290	21.6
473.astar	374	18.8	**374**	**18.8**	374	18.8	374	18.8	**374**	**18.8**	375	18.7
483.xalancbmk	199	34.6	**199**	**34.7**	199	34.7	199	34.6	**199**	**34.7**	199	34.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Baseboard Management Controller used to adjust the fan speed to 100%
Set Hyper-Threading to Disabled
Sysinfo program /spec15/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Dec 12 10:29:44 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2618L v2 @ 2.00GHz
      2 "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 6
        siblings  : 6
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
     cache size : 15360 KB

  From /proc/meminfo
     MemTotal:       263924204 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
     EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 12 10:27

  SPEC is set to: /spec15
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-root ext4  256G  6.5G  236G   3% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Insyde Corp. RMIBV629 05/12/2014
    Memory:
     16x Hynix HMT42GR7BFR4C-RD 16 GB 2 rank 1867 MHz, configured at 1333 MHz
     8x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"
OMP_NUM_THREADS = "12"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32 -opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-auto-p32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jan 14 10:27:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 January 2015.