



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 919

Express5800/E120f-M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 890

CPU2006 license: 9006


Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jun-2014

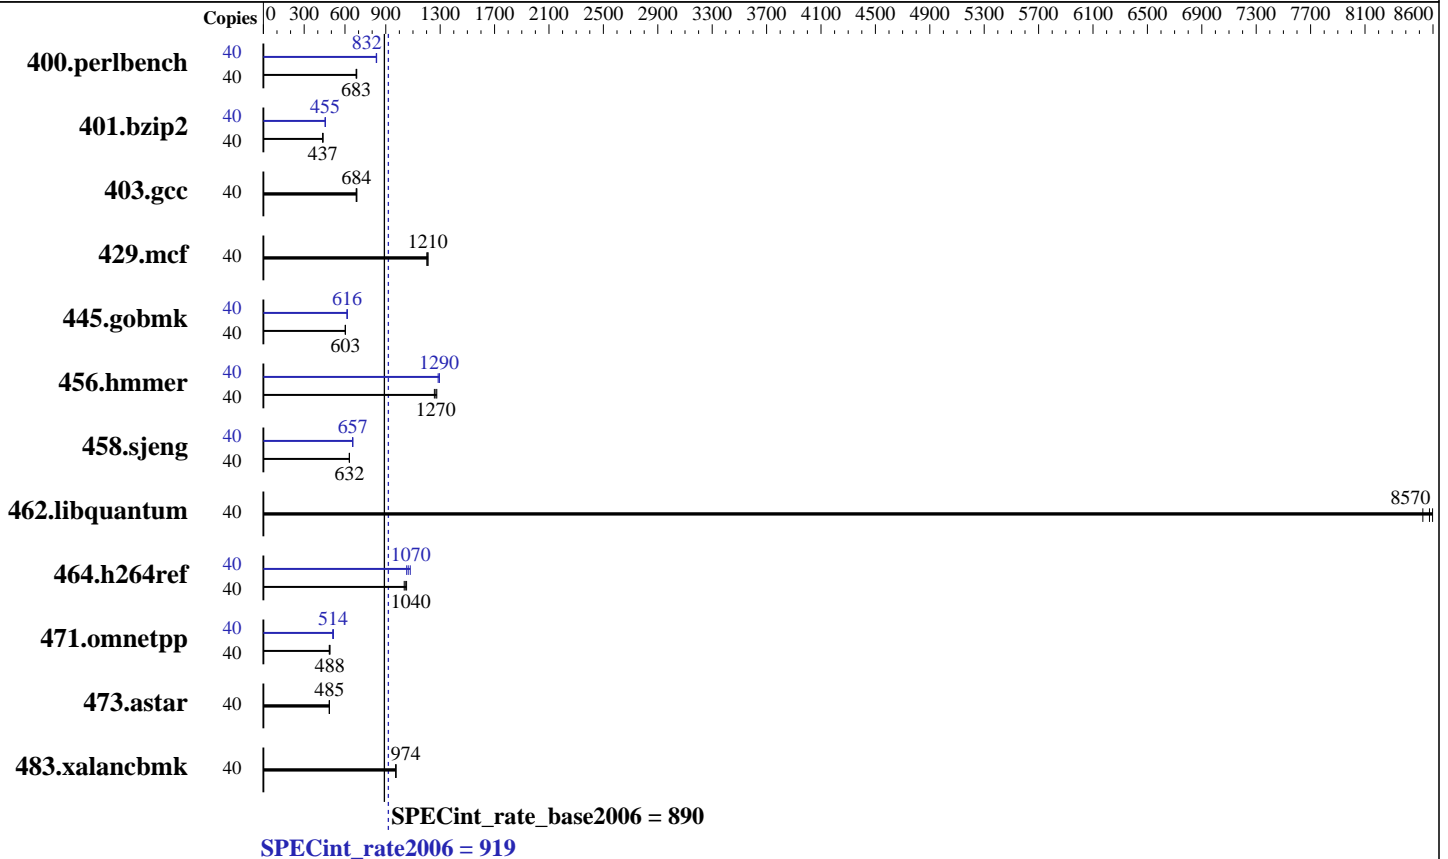

Hardware

CPU Name: Intel Xeon E5-2660 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.20.3.el6.x86_64
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 919

Express5800/E120f-M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 890

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jun-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	569	687	572	683	<u>572</u>	<u>683</u>	40	471	830	469	833	<u>470</u>	<u>832</u>
401.bzip2	40	884	437	882	438	<u>883</u>	<u>437</u>	40	<u>848</u>	<u>455</u>	849	455	847	456
403.gcc	40	<u>471</u>	<u>684</u>	472	683	468	688	40	<u>471</u>	<u>684</u>	472	683	468	688
429.mcf	40	301	1210	<u>302</u>	<u>1210</u>	304	1200	40	301	1210	<u>302</u>	<u>1210</u>	304	1200
445.gobmk	40	696	603	696	603	<u>696</u>	<u>603</u>	40	682	616	681	617	<u>681</u>	<u>616</u>
456.hammer	40	297	1260	<u>294</u>	<u>1270</u>	293	1280	40	290	1280	<u>288</u>	<u>1290</u>	288	1290
458.sjeng	40	766	632	765	633	<u>765</u>	<u>632</u>	40	<u>737</u>	<u>657</u>	737	657	737	657
462.libquantum	40	96.4	8600	<u>96.7</u>	<u>8570</u>	97.2	8530	40	96.4	8600	<u>96.7</u>	<u>8570</u>	97.2	8530
464.h264ref	40	841	1050	<u>848</u>	<u>1040</u>	855	1040	40	840	1050	820	1080	<u>831</u>	<u>1070</u>
471.omnetpp	40	511	489	516	484	<u>512</u>	<u>488</u>	40	<u>487</u>	<u>514</u>	490	510	485	515
473.astar	40	579	485	578	486	<u>579</u>	<u>485</u>	40	579	485	578	486	<u>579</u>	<u>485</u>
483.xalancbmk	40	<u>283</u>	<u>974</u>	283	974	283	974	40	<u>283</u>	<u>974</u>	283	974	283	974

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance
Patrol Scrub: Disabled
Demand Scrub: Disabled
Cluster on Die: Enabled

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 919

Express5800/E120f-M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 890

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jun-2014

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 919

Express5800/E120f-M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 890

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jun-2014

Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 919

Express5800/E120f-M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 890

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:28:56 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.