



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SPECfp[®]_rate2006 = 13600

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate_base2006 = 13300

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Nov-2014

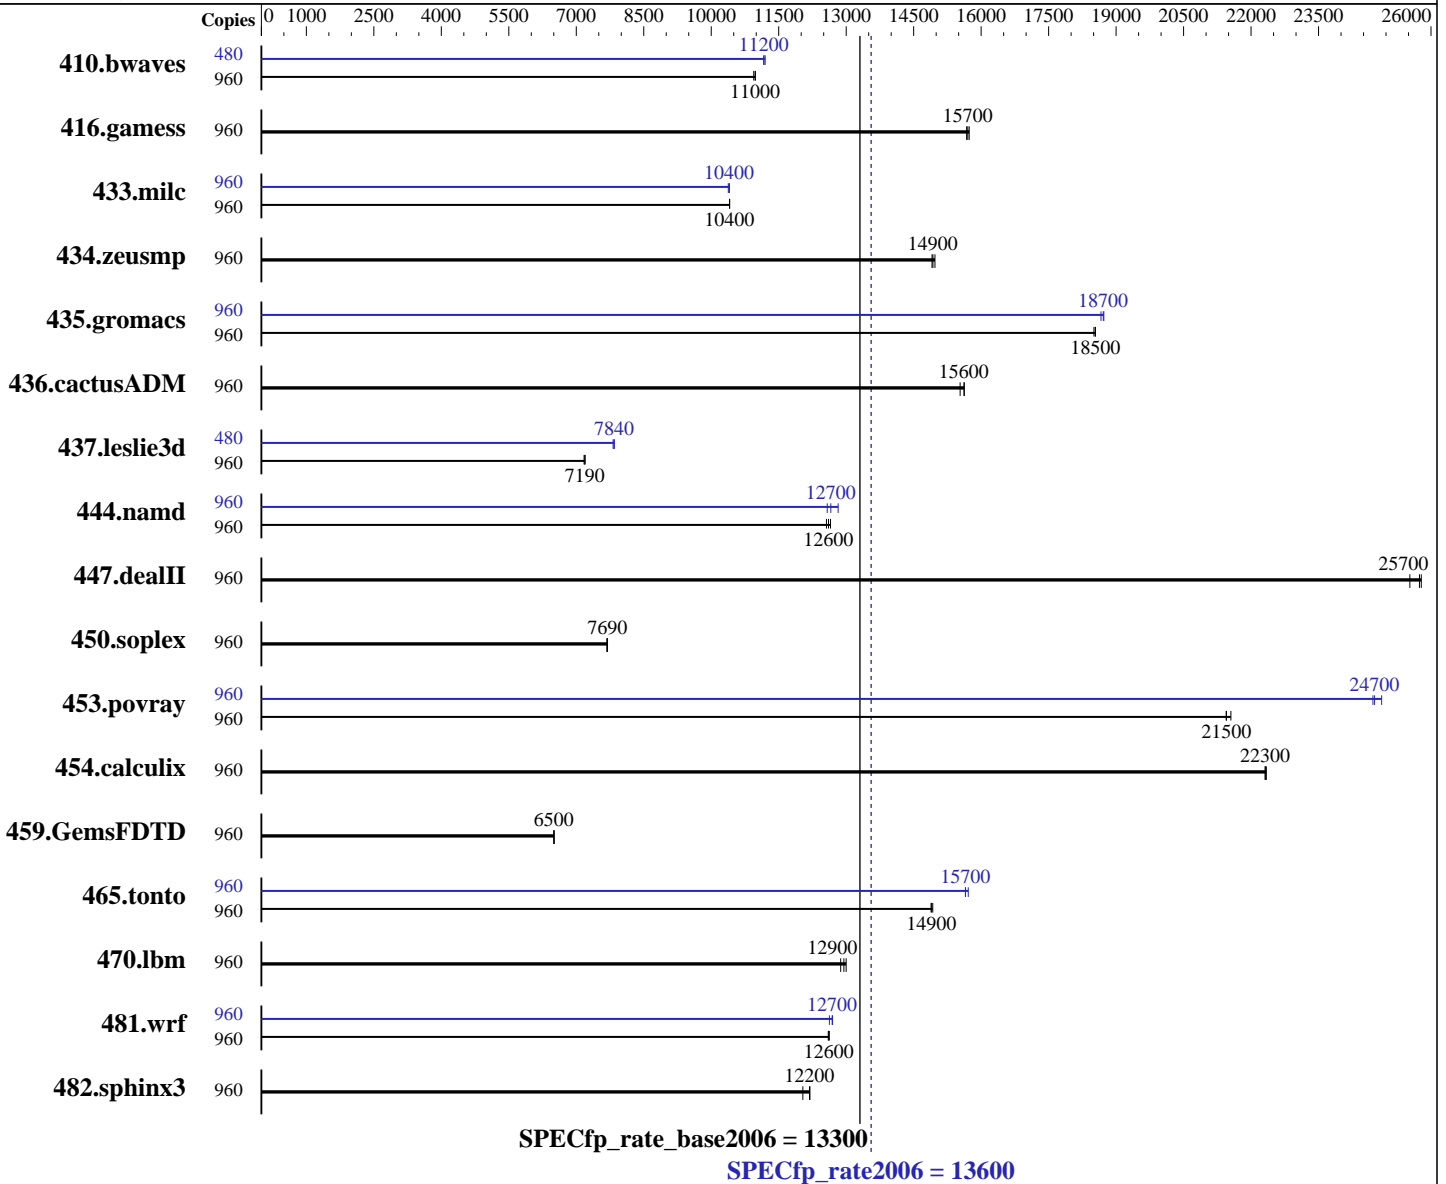

Hardware

CPU Name: Intel Xeon E7-8890 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 480 cores, 32 chips, 15 cores/chip, 2 threads/core
 CPU(s) orderable: 4-32 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3, Kernel 3.0.101-0.46-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: tmpfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 13600

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate_base2006 = 13300

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Nov-2014

L3 Cache: 37.5 MB I+D on chip per chip
Other Cache: None
Memory: 4 TB (256 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem: 4 TB tmpfs
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: SGI Foundation Software 2.11, Build 711rp42.sles11sp3-1412152100

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	960	1189	11000	1192	10900	1188	11000	480	584	11200	582	11200	584	11200
416.gamess	960	1195	15700	1197	15700	1199	15700	960	1195	15700	1197	15700	1199	15700
433.milc	960	847	10400	847	10400	847	10400	960	847	10400	849	10400	848	10400
434.zeusmp	960	583	15000	586	14900	585	14900	960	583	15000	586	14900	585	14900
435.gromacs	960	370	18500	370	18500	370	18500	960	366	18700	367	18700	366	18700
436.cactusADM	960	735	15600	734	15600	739	15500	960	735	15600	734	15600	739	15500
437.leslie3d	960	1258	7170	1254	7200	1255	7190	480	575	7850	576	7840	577	7820
444.namd	960	613	12600	609	12700	611	12600	960	612	12600	608	12700	601	12800
447.dealII	960	426	25800	430	25500	427	25700	960	426	25800	430	25500	427	25700
450.soplex	960	1041	7690	1043	7680	1041	7690	960	1041	7690	1043	7680	1041	7690
453.povray	960	237	21600	238	21500	238	21400	960	205	24900	207	24700	206	24700
454.calculix	960	355	22300	355	22300	355	22300	960	355	22300	355	22300	355	22300
459.GemsFDTD	960	1566	6500	1567	6500	1566	6510	960	1566	6500	1567	6500	1566	6510
465.tonto	960	634	14900	635	14900	633	14900	960	603	15700	604	15700	601	15700
470.lbm	960	1024	12900	1015	13000	1019	12900	960	1024	12900	1015	13000	1019	12900
481.wrf	960	849	12600	851	12600	850	12600	960	845	12700	849	12600	845	12700
482.sphinx3	960	1554	12000	1534	12200	1536	12200	960	1554	12000	1534	12200	1536	12200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem set up with:

```
mkdir -p /mnt/shm
mount -t tmpfs -o size=4096g,rw tmpfs /mnt/shm/
```

Turbo mode activated with:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 13600

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate_base2006 = 13300

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Nov-2014

Operating System Notes (Continued)

```
modprobe acpi_cpufreq
cpupower frequency-set -u 3400MHz -d 3400MHz -g performance
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/mnt/shm/cpu2006-1.2/libs/32:/mnt/shm/cpu2006-1.2/libs/64:/mnt/shm/cpu2006-1.2/sh"
```

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 13600

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate_base2006 = 13300

CPU2006 license: 4

Test date: Dec-2014

Test sponsor: SGI

Hardware Availability: Dec-2014

Tested by: SGI

Software Availability: Nov-2014

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32`

`470.lbm: basepeak = yes`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 13600

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate_base2006 = 13300

CPU2006 license: 4

Test date: Dec-2014

Test sponsor: SGI

Hardware Availability: Dec-2014

Tested by: SGI

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.html>

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 13600

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECfp_rate_base2006 = 13300

CPU2006 license: 4

Test date: Dec-2014

Test sponsor: SGI

Hardware Availability: Dec-2014

Tested by: SGI

Software Availability: Nov-2014

You can also download the XML flags sources by saving the following links:

- <http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.xml>
- <http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:29:49 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.