



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint®_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

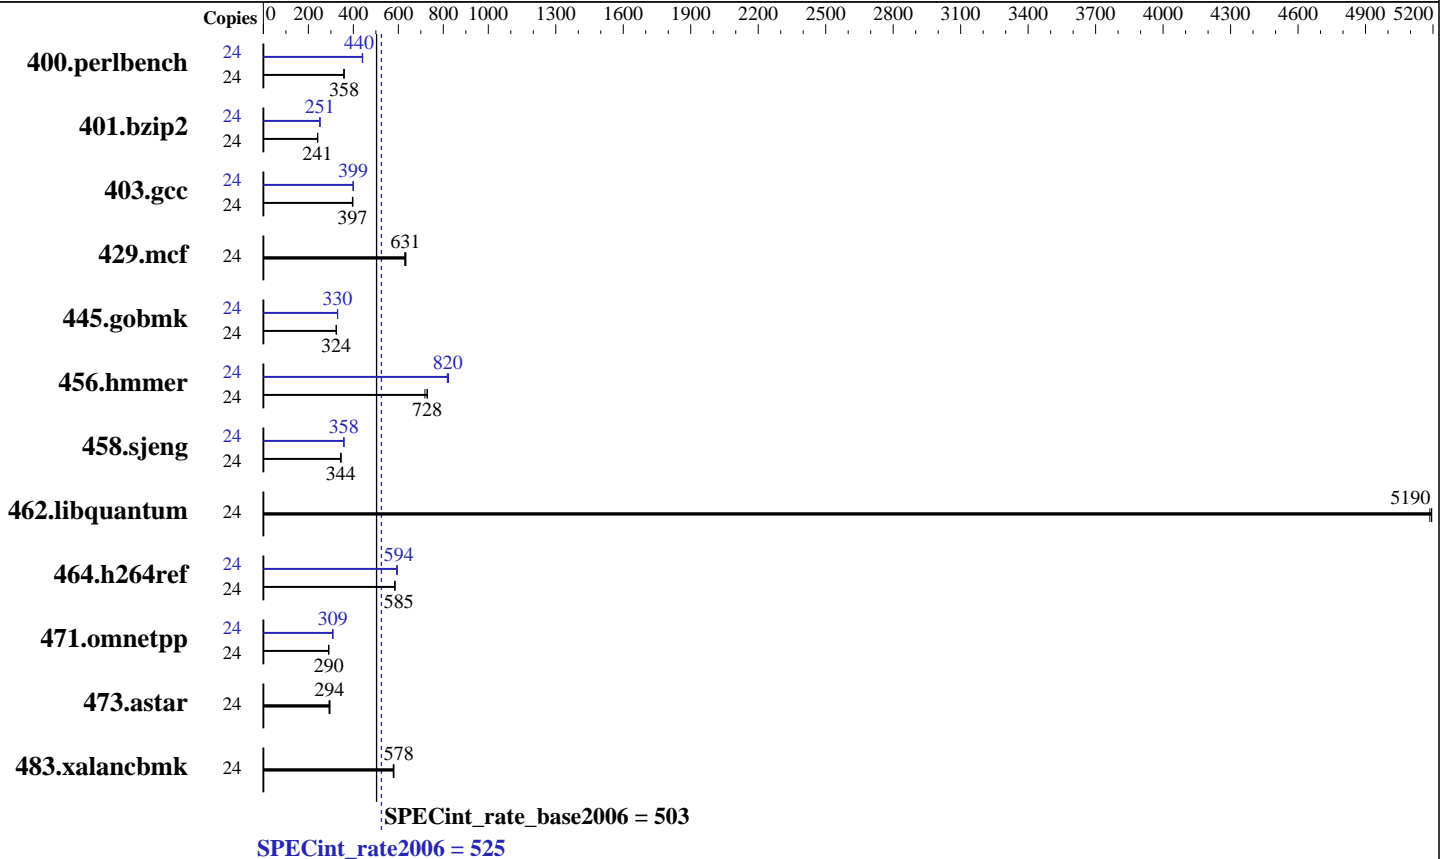

Hardware

CPU Name: Intel Xeon E5-2620 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.20.1.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	655	358	653	359	654	358	24	533	440	531	441	533	440
401.bzip2	24	960	241	963	241	958	242	24	922	251	919	252	922	251
403.gcc	24	487	397	486	398	488	396	24	482	400	484	399	485	398
429.mcf	24	347	631	348	628	345	634	24	347	631	348	628	345	634
445.gobmk	24	777	324	776	324	776	324	24	764	329	763	330	762	330
456.hammer	24	307	729	308	728	312	718	24	272	823	274	818	273	820
458.sjeng	24	840	346	845	344	845	344	24	812	358	810	358	811	358
462.libquantum	24	95.8	5190	95.7	5190	95.9	5190	24	95.8	5190	95.7	5190	95.9	5190
464.h264ref	24	907	585	910	584	908	585	24	896	593	895	594	892	595
471.omnetpp	24	516	291	516	290	517	290	24	486	308	486	309	486	309
473.astar	24	573	294	577	292	569	296	24	573	294	577	292	569	296
483.xalancbmk	24	285	581	287	578	287	578	24	285	581	287	578	287	578

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings: Default

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Mar 4 17:50:30 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

```

caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      263867600 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 7.0 (Maipo)

```

```

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
  Linux localhost.localdomain 3.10.0-123.20.1.el7.x86_64 #3 SMP Wed Feb 4
  14:55:18 CET 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 4 06:24

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  212G   26G  176G  13% /

```

```

Additional information from dmidecode:
  BIOS Intel Corporation SE5C610.86B.01.01.0008.021120151325 02/11/2015
  Memory:
  16x 16 GB
  8x NO DIMM NO DIMM
  16x Samsung M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

```

```

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmarthheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 24 17:17:50 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 March 2015.