



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®\_rate2006 = 139

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

SPECfp\_rate\_base2006 = 136

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2015

Hardware Availability: Mar-2015

Software Availability: Sep-2014

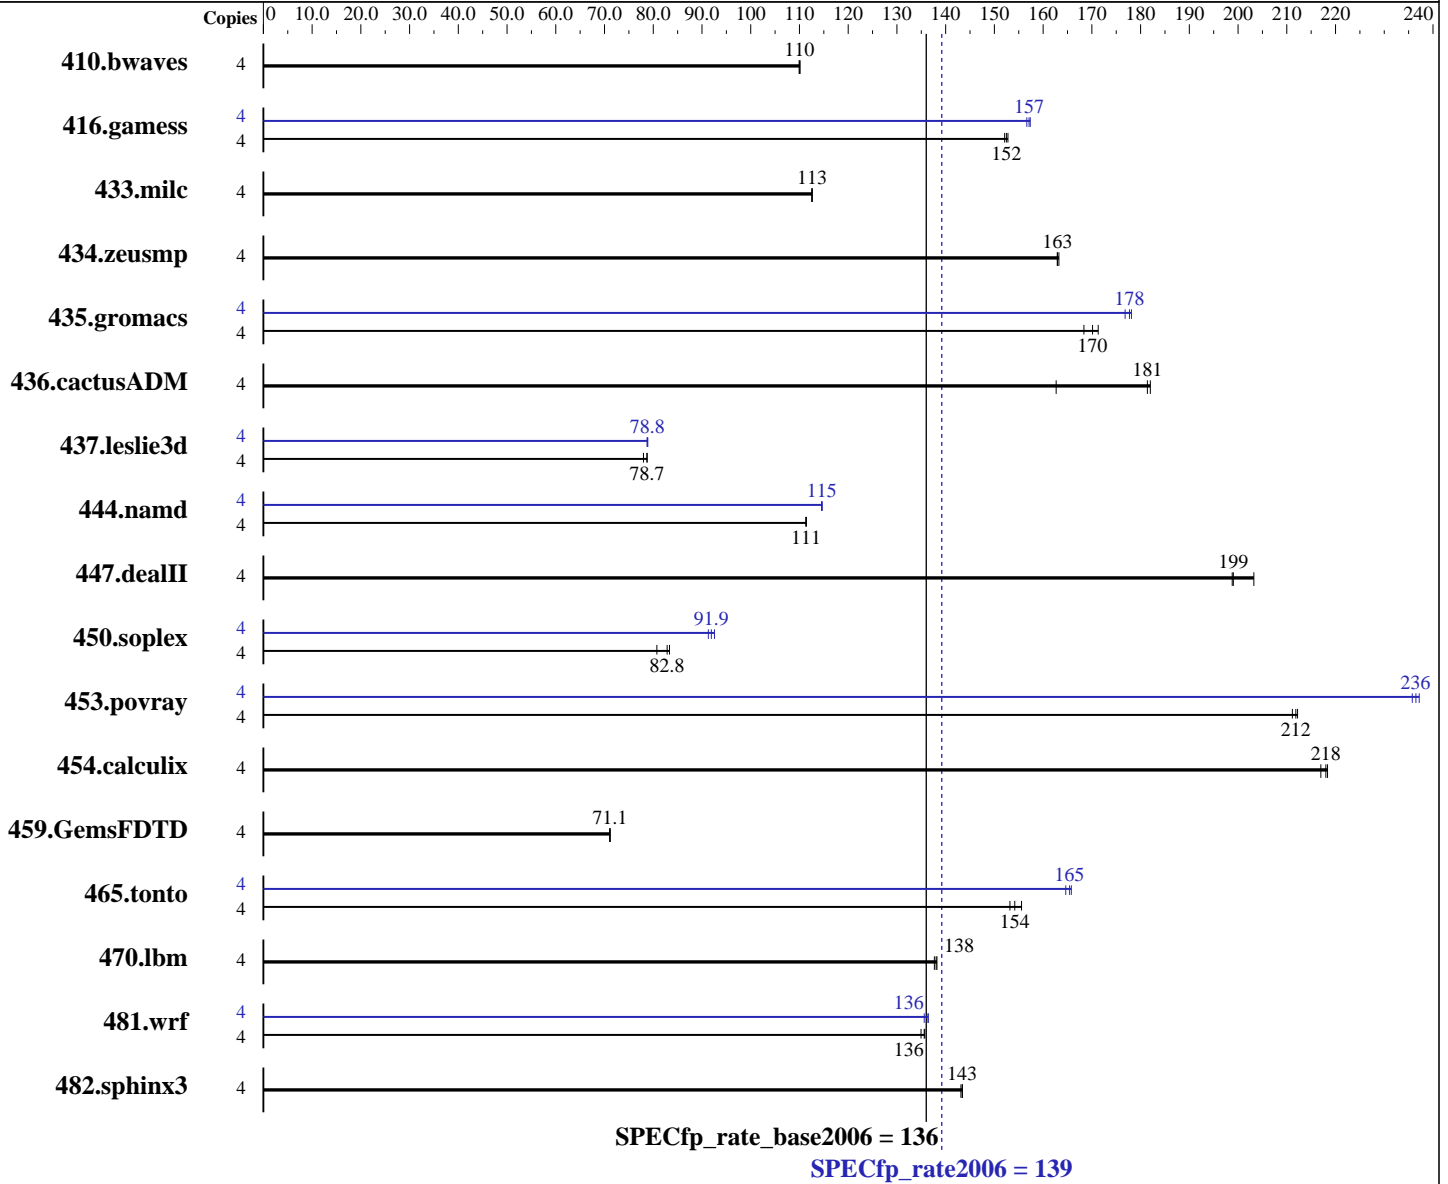

### Hardware

CPU Name: Intel Xeon E3-1220 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 139

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

SPECfp\_rate\_base2006 = 136

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (4 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
Disk Subsystem: 1 x 1 TB 3G SATA 7200 RPM, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	494	110	<b>494</b>	<b>110</b>	494	110	4	494	110	<b>494</b>	<b>110</b>	494	110
416.gamess	4	<b>514</b>	<b>152</b>	515	152	513	153	4	<b>498</b>	<b>157</b>	498	157	500	157
433.milc	4	326	113	326	113	<b>326</b>	<b>113</b>	4	326	113	326	113	<b>326</b>	<b>113</b>
434.zeusmp	4	223	163	<b>223</b>	<b>163</b>	223	163	4	223	163	<b>223</b>	<b>163</b>	223	163
435.gromacs	4	167	171	<b>168</b>	<b>170</b>	170	168	4	<b>161</b>	<b>178</b>	162	177	160	178
436.cactusADM	4	294	163	263	182	<b>264</b>	<b>181</b>	4	294	163	263	182	<b>264</b>	<b>181</b>
437.leslie3d	4	<b>478</b>	<b>78.7</b>	477	78.8	482	78.0	4	<b>477</b>	<b>78.8</b>	477	78.9	477	78.8
444.namd	4	<b>288</b>	<b>111</b>	288	111	288	111	4	<b>280</b>	<b>115</b>	280	115	280	115
447.dealII	4	230	199	<b>230</b>	<b>199</b>	225	203	4	230	199	<b>230</b>	<b>199</b>	225	203
450.soplex	4	413	80.7	400	83.3	<b>403</b>	<b>82.8</b>	4	<b>363</b>	<b>91.9</b>	365	91.3	360	92.6
453.povray	4	<b>100</b>	<b>212</b>	100	212	101	211	4	<b>90.0</b>	<b>236</b>	90.3	236	89.7	237
454.calculix	4	<b>151</b>	<b>218</b>	151	218	152	217	4	<b>151</b>	<b>218</b>	151	218	152	217
459.GemsFDTD	4	<b>597</b>	<b>71.1</b>	596	71.2	597	71.1	4	<b>597</b>	<b>71.1</b>	596	71.2	597	71.1
465.tonto	4	<b>255</b>	<b>154</b>	257	153	253	156	4	239	165	237	166	<b>238</b>	<b>165</b>
470.lbm	4	398	138	399	138	<b>398</b>	<b>138</b>	4	398	138	399	138	<b>398</b>	<b>138</b>
481.wrf	4	<b>329</b>	<b>136</b>	331	135	329	136	4	328	136	<b>328</b>	<b>136</b>	329	136
482.sphinx3	4	545	143	<b>544</b>	<b>143</b>	543	143	4	545	143	<b>544</b>	<b>143</b>	543	143

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
HP Power Regulator to High Performance Mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 139

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

SPECfp\_rate\_base2006 = 136

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Mar-2015  
**Hardware Availability:** Mar-2015  
**Software Availability:** Sep-2014

### Platform Notes (Continued)

Minimum Processor Idle Power Core C-State set to C6 Package  
Minimum Processor Idle Power Package C-State set to No Package State  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Double Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on ML10v2.Gen8 Sat Mar 7 09:44:43 2015

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1220 v3 @ 3.10GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32613032 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux ML10v2.Gen8 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 7 03:52
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 139

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

SPECfp\_rate\_base2006 = 136

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

## Platform Notes (Continued)

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel_ml10v2-home	xfs	865G	14G	852G	2%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP J10 02/02/2015

Memory:

4x HP 669239-081 8 GB 2 rank 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp\_rate2006 = 139

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

SPECfp\_rate\_base2006 = 136

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 139

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

SPECfp\_rate\_base2006 = 136

CPU2006 license: 3

Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
           -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 139**

ProLiant ML10 v2 Gen8  
(3.10 GHz, Intel Xeon E3-1220 v3)

**SPECfp\_rate\_base2006 = 136**

**CPU2006 license:** 3

**Test date:** Mar-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 31 12:10:10 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 March 2015.