



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 313

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

SPECint_rate_base2006 = 303

CPU2006 license: 3175


Test date: Mar-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

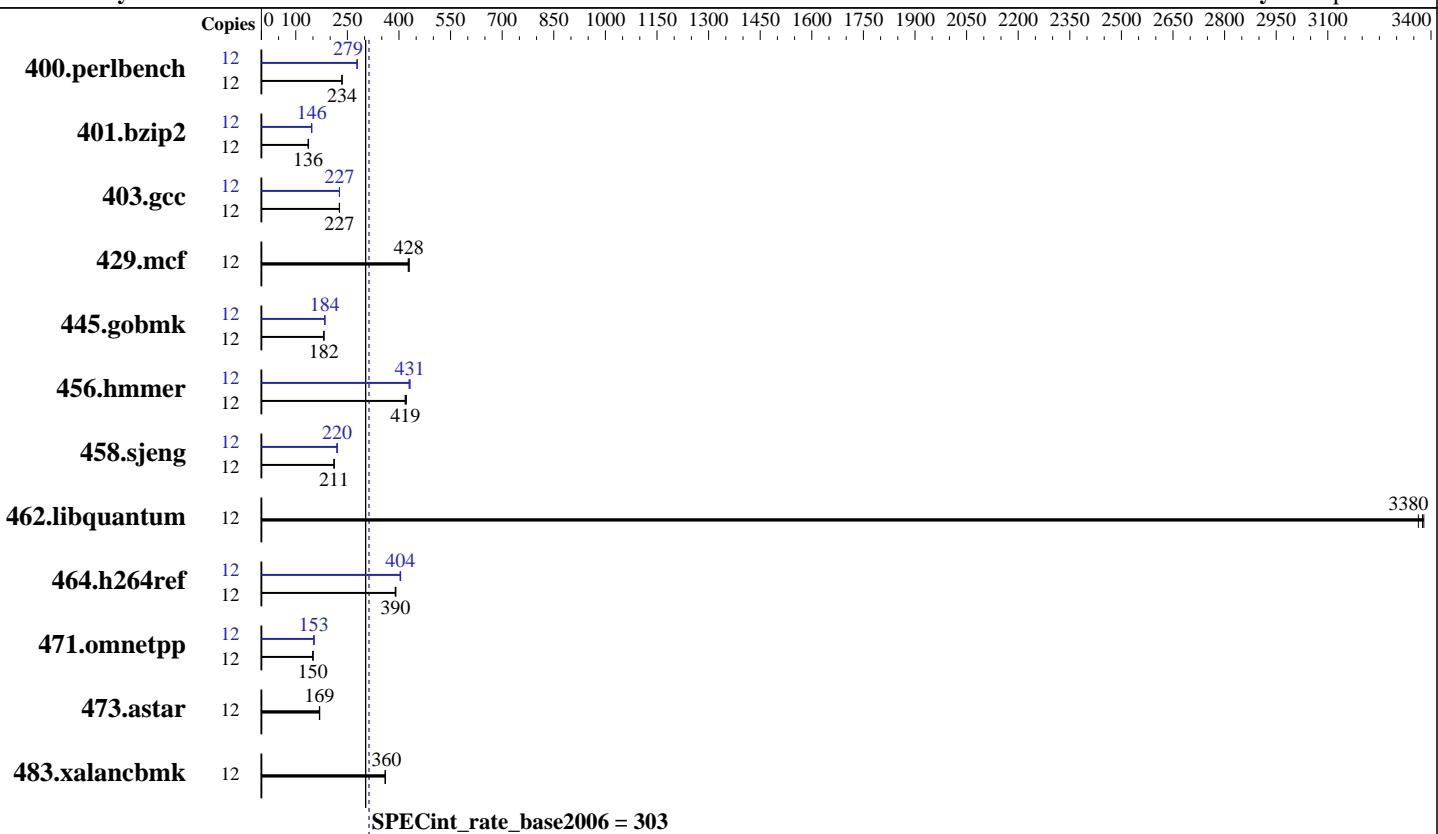

Hardware

| | |
|----------------------|---|
| CPU Name: | Intel Xeon E5-2609 v3 |
| CPU Characteristics: | |
| CPU MHz: | 1900 |
| FPU: | Integrated |
| CPU(s) enabled: | 12 cores, 2 chips, 6 cores/chip |
| CPU(s) orderable: | 1,2 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 15 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz) |
| Disk Subsystem: | 1 x 500 GB SATA, 7200 RPM |
| Other Hardware: | None |

Software

| | |
|-------------------|--|
| Operating System: | Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64 |
| Compiler: | C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux |
| Auto Parallel: | No |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.0 |



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 313

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

SPECint_rate_base2006 = 303

CPU2006 license: 3175

Test date: Mar-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|-------------|-------------|------------|------------|------------|------------|--------|-------------|-------------|------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 12 | 500 | 235 | 500 | 234 | 501 | 234 | 12 | 421 | 279 | 422 | 278 | 421 | 279 |
| 401.bzip2 | 12 | 844 | 137 | 850 | 136 | 850 | 136 | 12 | 794 | 146 | 791 | 146 | 792 | 146 |
| 403.gcc | 12 | 426 | 227 | 425 | 227 | 426 | 227 | 12 | 426 | 227 | 425 | 227 | 425 | 227 |
| 429.mcf | 12 | 255 | 428 | 255 | 430 | 256 | 427 | 12 | 255 | 428 | 255 | 430 | 256 | 427 |
| 445.gobmk | 12 | 693 | 182 | 692 | 182 | 693 | 182 | 12 | 682 | 184 | 682 | 185 | 683 | 184 |
| 456.hmmer | 12 | 268 | 418 | 266 | 421 | 267 | 419 | 12 | 260 | 431 | 261 | 429 | 259 | 432 |
| 458.sjeng | 12 | 687 | 211 | 687 | 211 | 687 | 211 | 12 | 658 | 221 | 660 | 220 | 661 | 220 |
| 462.libquantum | 12 | 73.7 | 3380 | 73.9 | 3360 | 73.6 | 3380 | 12 | 73.7 | 3380 | 73.9 | 3360 | 73.6 | 3380 |
| 464.h264ref | 12 | 680 | 390 | 679 | 391 | 683 | 389 | 12 | 658 | 403 | 656 | 405 | 657 | 404 |
| 471.omnetpp | 12 | 500 | 150 | 501 | 150 | 499 | 150 | 12 | 493 | 152 | 491 | 153 | 489 | 153 |
| 473.astar | 12 | 500 | 169 | 497 | 169 | 498 | 169 | 12 | 500 | 169 | 497 | 169 | 498 | 169 |
| 483.xalancbmk | 12 | 230 | 360 | 230 | 360 | 230 | 360 | 12 | 230 | 360 | 230 | 360 | 230 | 360 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Snoop Mode to ES mode

Sysinfo program /spec15/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Tue Mar 10 06:27:11 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
2 "physical id"s (chips)
12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 313

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

SPECint_rate_base2006 = 303

CPU2006 license: 3175

Test date: Mar-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

```
caution.)  
    cpu cores : 6  
    siblings   : 6  
    physical 0: cores 0 1 2 3 4 5  
    physical 1: cores 0 1 2 3 4 5  
    cache size : 15360 KB  
  
From /proc/meminfo  
MemTotal:      263579836 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.0 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.0"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server  
  
uname -a:  
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57  
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Mar 10 06:19  
  
SPEC is set to: /spec15  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        ext4  448G  187G  239G  44% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS Insyde Corp. 1.20 10/25/2014  
Memory:  
 8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz, configured at 1600 MHz  
 8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
  
(End of data from sysinfo program)
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 313

SPECint_rate_base2006 = 303

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Huawei XH622 V3 and Huawei XH628 V3

are electronically equivalent.

The results have been measured on a Huawei XH622 V3 model.

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 313

SPECint_rate_base2006 = 303

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 313

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

SPECint_rate_base2006 = 303

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 313

Huawei XH622 V3 (Intel Xeon E5-2609 v3)

SPECint_rate_base2006 = 303

CPU2006 license: 3175

Test date: Mar-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 8 11:01:16 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 April 2015.