



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp<sup>®</sup>\_rate2006 = 159

SPECfp\_rate\_base2006 = 153

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2015

Hardware Availability: Jun-2014

Software Availability: Sep-2014

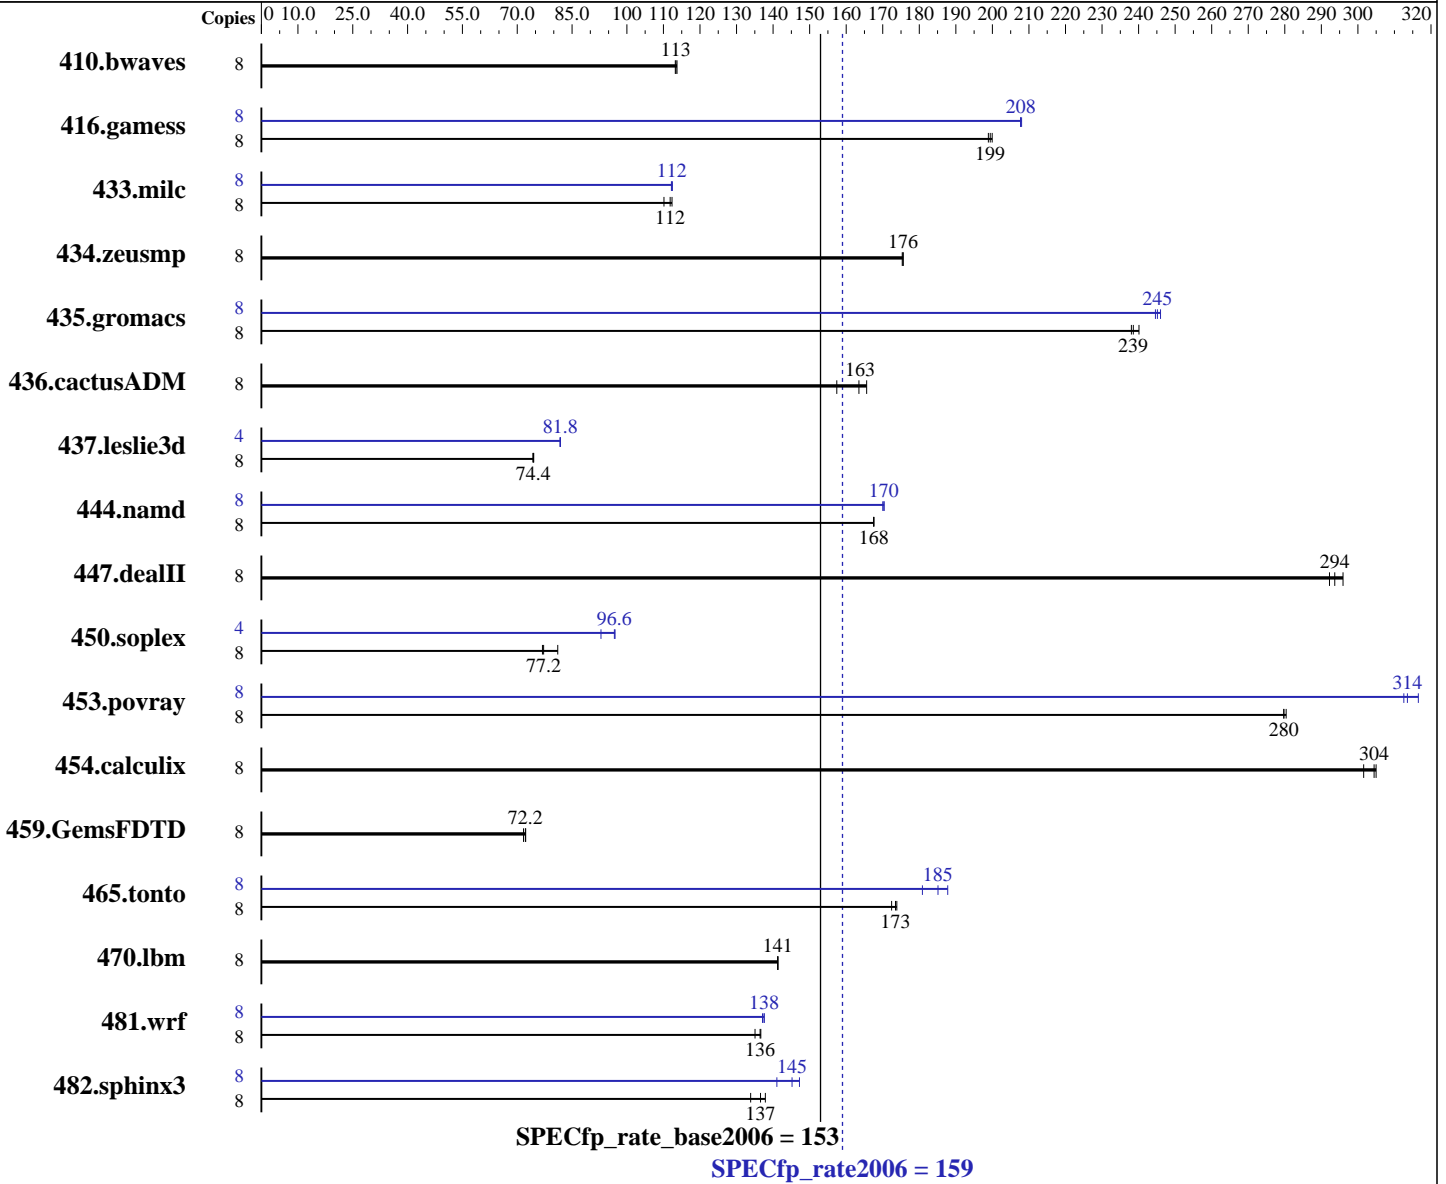

### Hardware

CPU Name: Intel Xeon E3-1286 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_rate2006 = 159

SPECfp\_rate\_base2006 = 153

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2015

Hardware Availability: Jun-2014

Software Availability: Sep-2014

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	956	114	960	113	<u>959</u>	<u>113</u>	8	956	114	960	113	<u>959</u>	<u>113</u>
416.gamess	8	788	199	783	200	<u>786</u>	<u>199</u>	8	753	208	<u>754</u>	<u>208</u>	754	208
433.milc	8	667	110	654	112	<u>657</u>	<u>112</u>	8	655	112	<u>654</u>	<u>112</u>	653	112
434.zeusmp	8	<u>415</u>	<u>176</u>	415	176	415	175	8	<u>415</u>	<u>176</u>	415	176	415	175
435.gromacs	8	<u>239</u>	<u>239</u>	240	238	238	240	8	<u>233</u>	<u>245</u>	232	246	234	245
436.cactusADM	8	607	157	577	166	<u>585</u>	<u>163</u>	8	607	157	577	166	<u>585</u>	<u>163</u>
437.leslie3d	8	1012	74.3	<u>1010</u>	<u>74.4</u>	1009	74.5	4	460	81.8	460	81.7	<u>460</u>	<u>81.8</u>
444.namd	8	383	168	383	168	<u>383</u>	<u>168</u>	8	<u>377</u>	<u>170</u>	377	170	377	170
447.dealII	8	309	296	<u>312</u>	<u>294</u>	313	292	8	309	296	<u>312</u>	<u>294</u>	313	292
450.soplex	8	868	76.9	823	81.1	<u>864</u>	<u>77.2</u>	4	<u>345</u>	<u>96.6</u>	359	92.9	345	96.8
453.povray	8	<u>152</u>	<u>280</u>	152	280	152	280	8	136	313	134	317	<u>136</u>	<u>314</u>
454.calculix	8	216	305	<u>217</u>	<u>304</u>	219	302	8	216	305	<u>217</u>	<u>304</u>	219	302
459.GemsFDTD	8	1183	71.7	<u>1175</u>	<u>72.2</u>	1174	72.3	8	1183	71.7	<u>1175</u>	<u>72.2</u>	1174	72.3
465.tonto	8	457	172	453	174	<u>454</u>	<u>173</u>	8	<u>425</u>	<u>185</u>	419	188	435	181
470.lbm	8	778	141	<u>778</u>	<u>141</u>	778	141	8	778	141	<u>778</u>	<u>141</u>	778	141
481.wrf	8	662	135	<u>655</u>	<u>136</u>	654	137	8	650	138	652	137	<u>650</u>	<u>138</u>
482.sphinx3	8	1131	138	1165	134	<u>1142</u>	<u>137</u>	8	1059	147	<u>1074</u>	<u>145</u>	1106	141

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration  
ICE Performance Modes set to Full Speed  
ClE Support set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 159

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_rate\_base2006 = 153

CPU2006 license: 9017

Test date: Mar-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on TS440 Fri Mar 13 01:43:01 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1286 v3 @ 3.70GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16154648 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux TS440 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 12 17:02

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   741G  21G  721G   3% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_rate2006 = 159

SPECfp\_rate\_base2006 = 153

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2015

Hardware Availability: Jun-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO FBKT99AUS 09/19/2014

Memory:

2x Samsung M391B1G73BH0-YK0 8 GB 2 rank 1600 MHz

2x [Empty] [Empty]

(End of data from sysinfo program)

TS440 support 2 channels and 2 DIMMs per channel, total 4 DIMMs.

2DIMM slots installed with 8 GB DIMM for this run.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.lelie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_rate2006 = 159

SPECfp\_rate\_base2006 = 153

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2015

Hardware Availability: Jun-2014

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_rate2006 = 159

SPECfp\_rate\_base2006 = 153

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2015

Hardware Availability: Jun-2014

Software Availability: Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div
            -prof-use(pass 2) -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS440 (Intel Xeon E3-1286 v3, 3.70 GHz)

**SPECfp\_rate2006 = 159**

**SPECfp\_rate\_base2006 = 153**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Mar-2015

**Hardware Availability:** Jun-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-TS440-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-TS440-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 8 11:02:26 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 April 2015.