



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 202 S6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint®_rate2006 = 536

SPECint_rate_base2006 = 512

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

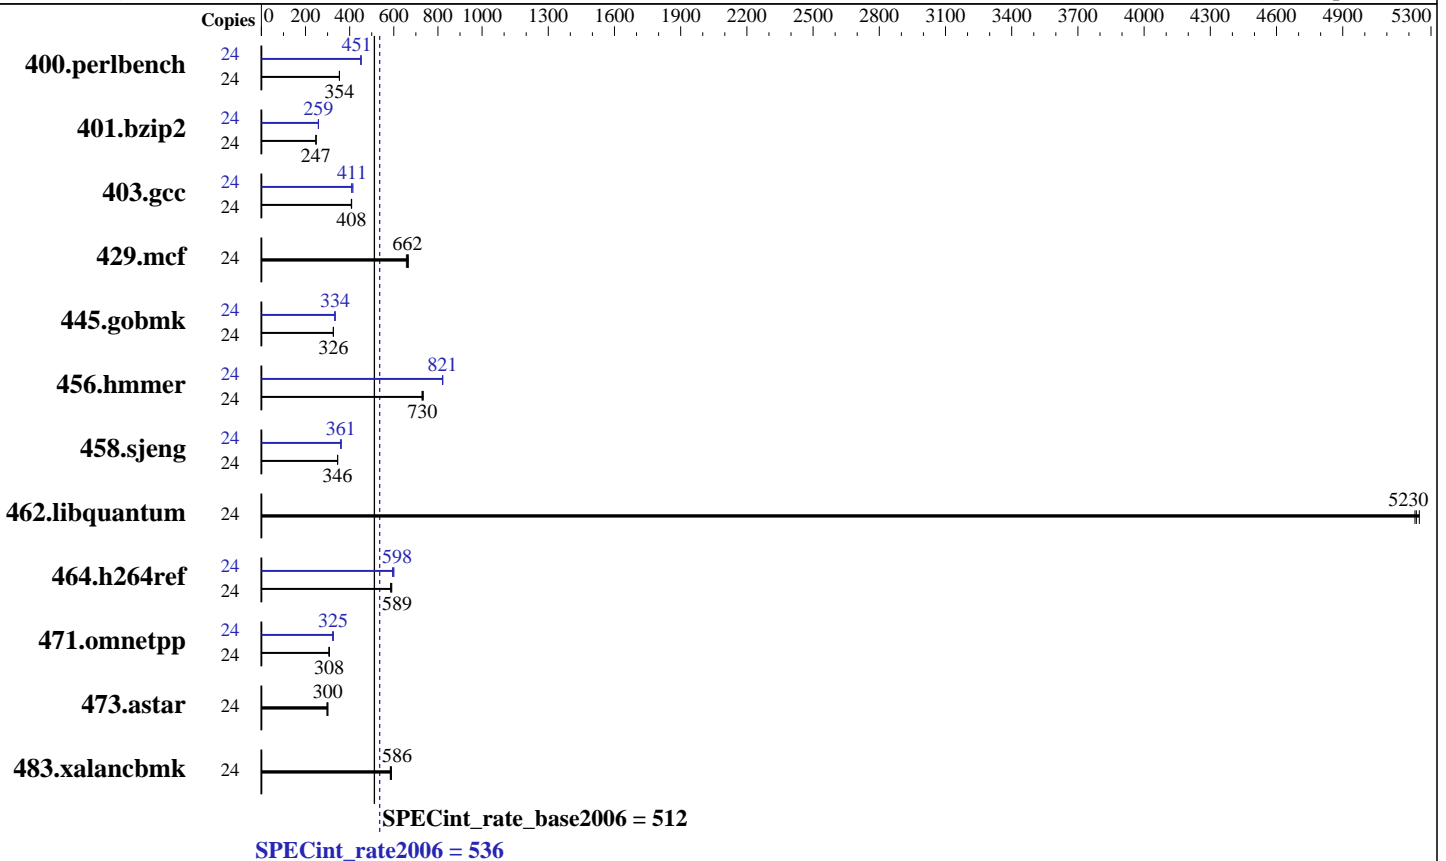

Hardware

CPU Name: Intel Xeon E5-2620 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 2.6.32-504.8.1.el6.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 202 S6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 536

SPECint_rate_base2006 = 512

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	663	354	663	354	663	354	24	520	451	519	451	519	452
401.bzip2	24	936	247	936	247	934	248	24	898	258	895	259	895	259
403.gcc	24	474	408	472	409	473	408	24	472	409	466	415	470	411
429.mcf	24	329	666	331	662	333	657	24	329	666	331	662	333	657
445.gobmk	24	771	327	771	326	772	326	24	755	334	757	333	753	334
456.hammer	24	308	728	305	734	307	730	24	272	822	273	820	273	821
458.sjeng	24	842	345	840	346	840	346	24	807	360	805	361	803	362
462.libquantum	24	95.0	5230	95.1	5230	94.8	5250	24	95.0	5230	95.1	5230	94.8	5250
464.h264ref	24	907	585	902	589	899	591	24	889	598	884	601	893	594
471.omnetpp	24	488	308	490	306	486	309	24	464	323	462	325	460	326
473.astar	24	559	301	567	297	561	300	24	559	301	567	297	561	300
483.xalancbmk	24	281	589	283	586	283	584	24	281	589	283	586	283	584

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings
Power Technology = Energy Efficient
Enforce POR = Disabled

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on SUT Thu Mar 12 14:51:31 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 536

ACTINA SOLAR 202 S6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate_base2006 = 512

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      264426940 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.6 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux SUT 2.6.32-504.8.1.el6.x86_64 #1 SMP Wed Mar 11 12:12:13 CET 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 12 14:50

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  212G  37G  165G  18% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0c 02/12/2015
Memory:
 16x 16 GB
 2x Samsung(date:14/33) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank
 14x Samsung(date:14/40) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

```

```

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 536

ACTINA SOLAR 202 S6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate_base2006 = 512

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory
using RedHat EL 6.6

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 536

ACTINA SOLAR 202 S6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate_base2006 = 512

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 202 S6 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECint_rate2006 = 536

SPECint_rate_base2006 = 512

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 8 11:03:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 April 2015.