



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8891 v3, 2.80 GHz)

**SPECint®2006 = Not Run**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Apr-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

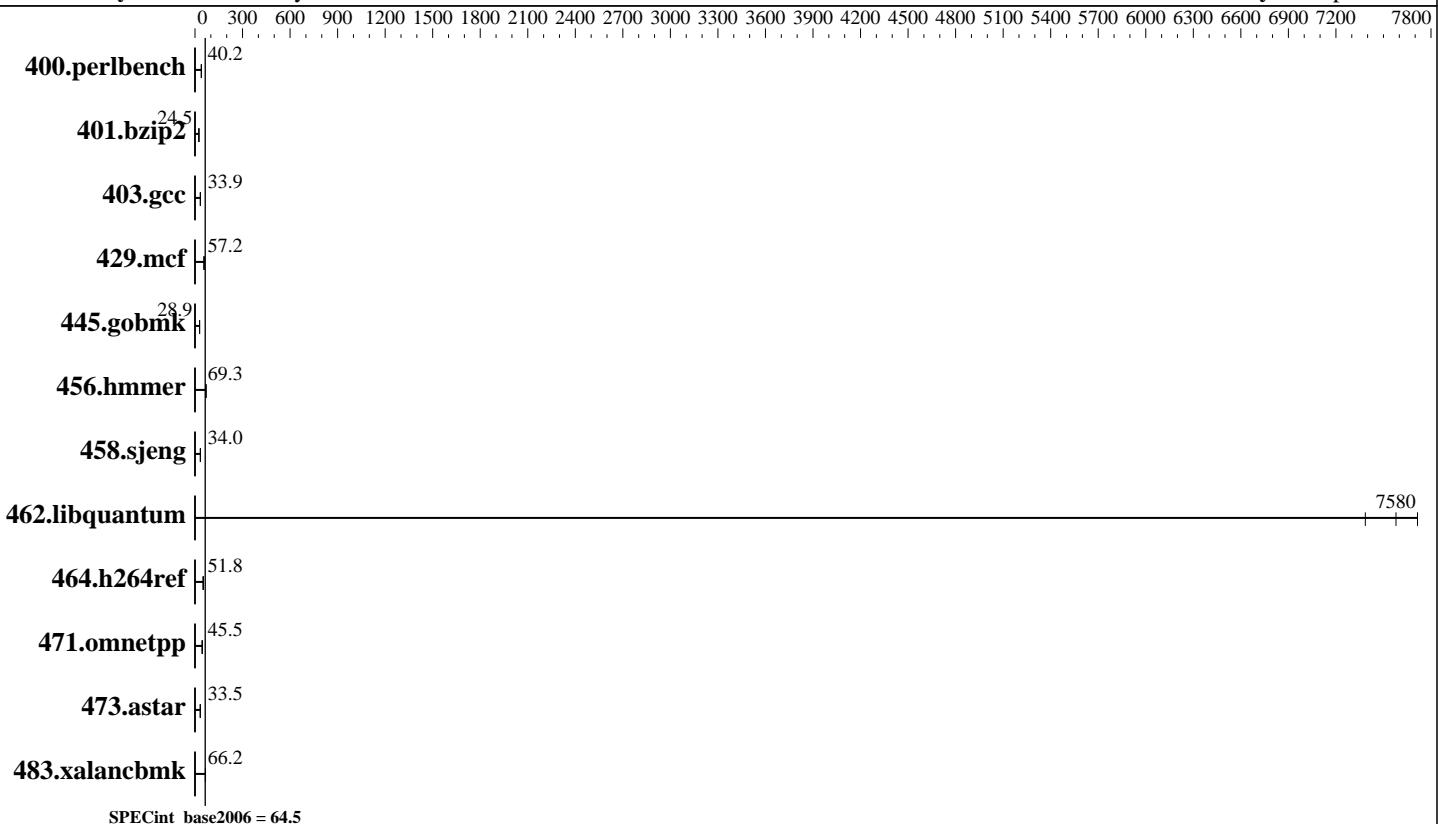

### Hardware

CPU Name: Intel Xeon E7-8891 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
 CPU(s) orderable: 1,2,3,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 400 GB SSD SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) 3.12.28-4-default  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8891 v3, 2.80 GHz)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 9019

**Test date:** Apr-2015

**Test sponsor:** Cisco Systems

**Hardware Availability:** May-2015

**Tested by:** Cisco Systems

**Software Availability:** Sep-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	243	40.3	<b>243</b>	<b>40.2</b>	244	40.0						
401.bzip2	<b>394</b>	<b>24.5</b>	394	24.5	393	24.6						
403.gcc	<b>237</b>	<b>33.9</b>	237	33.9	238	33.9						
429.mcf	160	57.0	<b>159</b>	<b>57.2</b>	159	57.3						
445.gobmk	362	28.9	<b>363</b>	<b>28.9</b>	364	28.8						
456.hmmer	<b>135</b>	<b>69.3</b>	135	69.3	135	69.2						
458.sjeng	<b>356</b>	<b>34.0</b>	356	34.0	355	34.0						
462.libquantum	2.81	7390	<b>2.73</b>	<b>7580</b>	2.69	7710						
464.h264ref	427	51.8	426	51.9	<b>427</b>	<b>51.8</b>						
471.omnetpp	138	45.2	135	46.2	<b>137</b>	<b>45.5</b>						
473.astar	<b>210</b>	<b>33.5</b>	210	33.4	210	33.5						
483.xalancbmk	<b>104</b>	<b>66.2</b>	105	65.4	104	66.4						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to Enterprise  
Power Technology set to Energy-Efficient  
Energy Performance BIAS setting set to Balanced Performance  
Memory RAS configuration set to Maximum Performance  
Memory Power Saving Mode set to Disabled  
Intel Hyper-Threading Technology option set to Disabled  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3ffb8667b5a285932ceab81e28219e1  
running on linux-gj2z Mon Apr 20 00:48:06 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8891 v3 @ 2.80GHz
        4 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings  : 10
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8891 v3, 2.80 GHz)

SPECint2006 =

Not Run

SPECint\_base2006 =

64.5

CPU2006 license: 9019

Test date: Apr-2015

Test sponsor: Cisco Systems

Hardware Availability: May-2015

Tested by: Cisco Systems

Software Availability: Sep-2014

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 4 6 8 17 19 20 23
physical 1: cores 0 1 2 4 6 8 17 19 20 23
physical 2: cores 0 1 2 4 6 8 17 19 20 23
physical 3: cores 0 1 2 4 6 8 17 19 20 23
cache size : 46080 KB

From /proc/meminfo
MemTotal:      1058834680 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
Linux linux-gj2z 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 19 23:19

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   229G   59G  170G  26% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C460M4.2.0.4.20.040420150215 04/04/2015
Memory:
 64x 0xCE00 M393A2G40DB0-CPB 16 GB 2 rank 1600 MHz
 32x NO DIMM NO DIMM 1600 MHz

(End of data from sysinfo program)
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems	<b>SPECint2006 =</b>	<b>Not Run</b>
Cisco UCS C460 M4 (Intel Xeon E7-8891 v3, 2.80 GHz)	<b>SPECint_base2006 =</b>	<b>64.5</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Apr-2015
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	May-2015
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Sep-2014

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"  
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"  
OMP_NUM_THREADS = "40"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB

memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmr: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
471.omnetpp: -DSPEC_CPU_LP64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8891 v3, 2.80 GHz)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 64.5**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Apr-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 5 15:16:09 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 May 2015.