



SPEC[®] CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2603 v3, 1.60 GHz)

SPECint[®]_rate2006 = 276

SPECint_rate_base2006 = 267

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

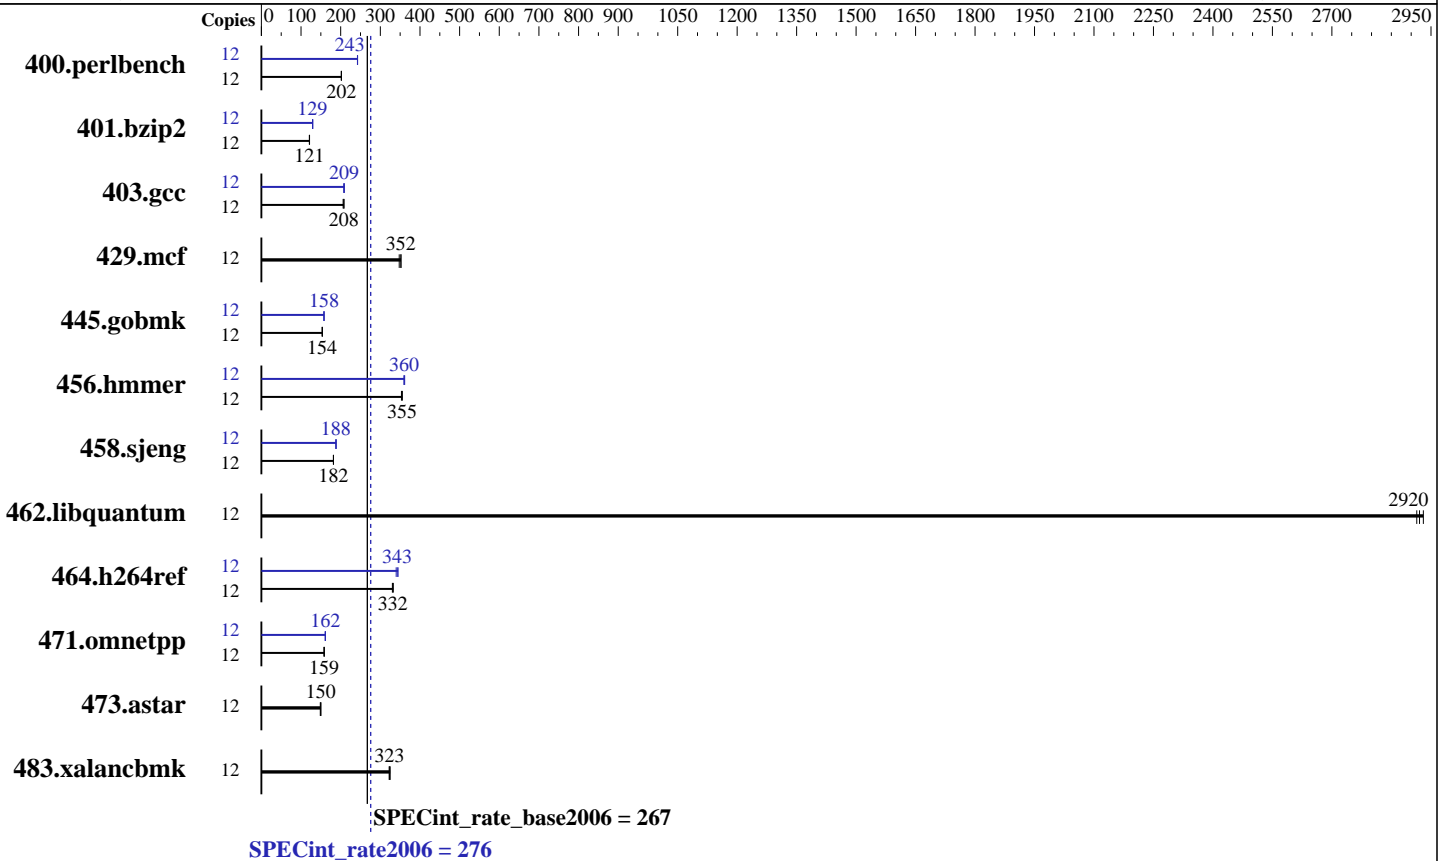

Hardware

CPU Name: Intel Xeon E5-2603 v3
 CPU Characteristics:
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 2.6.32-504.8.1.el6.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2603 v3, 1.60 GHz)

SPECint_rate2006 = 276

SPECint_rate_base2006 = 267

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Apr-2015
Hardware Availability: Sep-2014
Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	580	202	<u>581</u>	<u>202</u>	582	201	12	484	242	<u>483</u>	<u>243</u>	483	243
401.bzip2	12	953	121	956	121	<u>956</u>	<u>121</u>	12	896	129	<u>896</u>	<u>129</u>	895	129
403.gcc	12	469	206	<u>464</u>	<u>208</u>	464	208	12	462	209	<u>463</u>	<u>209</u>	465	208
429.mcf	12	<u>311</u>	<u>352</u>	315	348	311	352	12	<u>311</u>	<u>352</u>	315	348	311	352
445.gobmk	12	<u>820</u>	<u>154</u>	820	154	819	154	12	797	158	<u>797</u>	<u>158</u>	798	158
456.hammer	12	<u>315</u>	<u>355</u>	315	355	317	353	12	<u>311</u>	<u>360</u>	310	361	311	360
458.sjeng	12	799	182	799	182	<u>799</u>	<u>182</u>	12	773	188	<u>772</u>	<u>188</u>	770	189
462.libquantum	12	85.3	2910	<u>85.1</u>	<u>2920</u>	84.8	2930	12	85.3	2910	<u>85.1</u>	<u>2920</u>	84.8	2930
464.h264ref	12	<u>800</u>	<u>332</u>	804	330	799	332	12	<u>775</u>	<u>343</u>	770	345	781	340
471.omnetpp	12	<u>473</u>	<u>159</u>	473	159	475	158	12	466	161	<u>464</u>	<u>162</u>	464	162
473.astar	12	<u>562</u>	<u>150</u>	567	149	562	150	12	<u>562</u>	<u>150</u>	567	149	562	150
483.xalancbmk	12	<u>256</u>	<u>323</u>	257	322	255	325	12	<u>256</u>	<u>323</u>	257	322	255	325

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:

Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = Auto
Set Fan Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on SUT Fri Apr 10 16:12:41 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2603 v3, 1.60 GHz)

SPECint_rate2006 = 276

SPECint_rate_base2006 = 267

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2603 v3 @ 1.60GHz
  2 "physical id"s (chips)
  12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      264424040 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.6 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux SUT 2.6.32-504.8.1.el6.x86_64 #1 SMP Wed Mar 11 12:12:13 CET 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 10 16:09

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  212G  37G  165G  18% /

```

```

Additional information from dmidecode:
BIOS Intel Corporation SE5C610.86B.01.01.0008.021120151325 02/11/2015
Memory:
 16x 16 GB
 16x Micron 36ASF2G72PZ-2G1A2 16 GB 1600 MHz 2 rank
 8x NO DIMM NO DIMM

```

```

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 276

ACTINA SOLAR 220 X6 (Intel Xeon E5-2603 v3, 1.60 GHz)

SPECint_rate_base2006 = 267

CPU2006 license: 9008

Test date: Apr-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory
using RedHat EL 6.6

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2603 v3, 1.60 GHz)

SPECint_rate2006 = 276

SPECint_rate_base2006 = 267

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2603 v3, 1.60 GHz)

SPECint_rate2006 = 276

SPECint_rate_base2006 = 267

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.20150519.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.20150519.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 19 18:11:47 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 May 2015.