



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint®\_rate2006 = 1100

PRIMERGY RX2530 M1, Intel Xeon E5-2683 v3, 2.0 GHz

SPECint\_rate\_base2006 = 1070

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2015

Hardware Availability: Feb-2015

Software Availability: Nov-2013

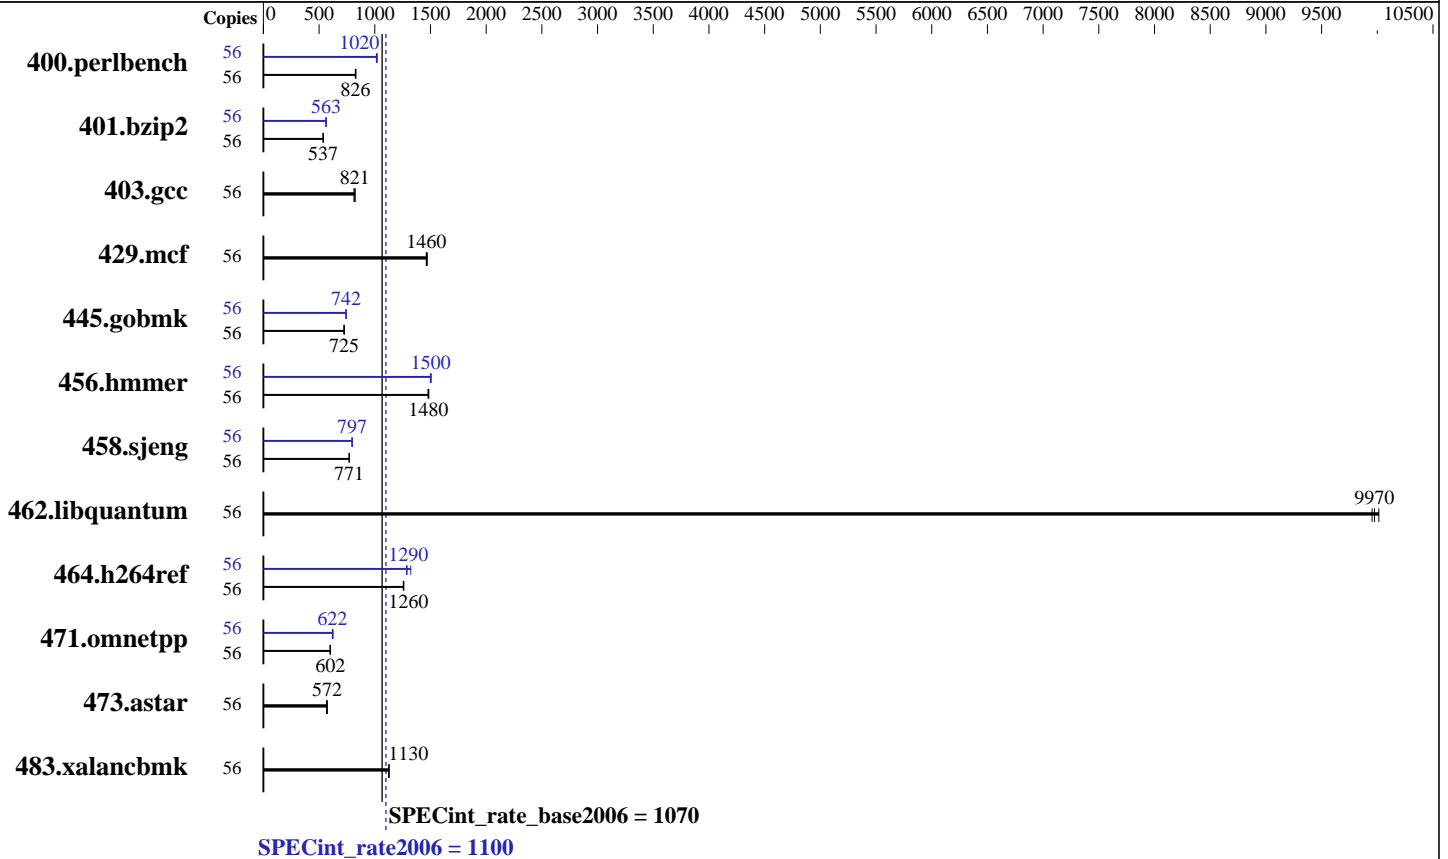

### Hardware

CPU Name: Intel Xeon E5-2683 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.23.3.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 1100

PRIMERGY RX2530 M1, Intel Xeon E5-2683 v3, 2.0 GHz

SPECint\_rate\_base2006 = 1070

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2015  
Hardware Availability: Feb-2015  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	658	832	<b><u>662</u></b>	<b><u>826</u></b>	663	826	56	<b><u>539</u></b>	<b><u>1020</u></b>	535	1020	539	1010
401.bzip2	56	<b><u>1006</u></b>	<b><u>537</u></b>	1008	536	1005	538	56	958	564	<b><u>960</u></b>	<b><u>563</u></b>	962	562
403.gcc	56	<b><u>549</u></b>	<b><u>821</u></b>	554	813	548	823	56	<b><u>549</u></b>	<b><u>821</u></b>	554	813	548	823
429.mcf	56	<b><u>349</u></b>	<b><u>1460</u></b>	347	1470	349	1460	56	<b><u>349</u></b>	<b><u>1460</u></b>	347	1470	349	1460
445.gobmk	56	810	725	811	725	<b><u>810</u></b>	<b><u>725</u></b>	56	793	741	791	743	<b><u>792</u></b>	<b><u>742</u></b>
456.hammer	56	352	1490	<b><u>353</u></b>	<b><u>1480</u></b>	353	1480	56	347	1510	<b><u>348</u></b>	<b><u>1500</u></b>	349	1500
458.sjeng	56	<b><u>879</u></b>	<b><u>771</u></b>	879	771	880	770	56	851	796	850	797	<b><u>850</u></b>	<b><u>797</u></b>
462.libquantum	56	116	10000	<b><u>116</u></b>	<b><u>9970</u></b>	117	9950	56	116	10000	<b><u>116</u></b>	<b><u>9970</u></b>	117	9950
464.h264ref	56	987	1260	<b><u>984</u></b>	<b><u>1260</u></b>	984	1260	56	<b><u>961</u></b>	<b><u>1290</u></b>	965	1280	936	1320
471.omnetpp	56	581	602	<b><u>582</u></b>	<b><u>602</u></b>	586	598	56	566	619	<b><u>563</u></b>	<b><u>622</u></b>	559	626
473.astar	56	<b><u>687</u></b>	<b><u>572</u></b>	694	566	686	573	56	<b><u>687</u></b>	<b><u>572</u></b>	694	566	686	573
483.xalancbmk	56	<b><u>343</u></b>	<b><u>1130</u></b>	343	1130	342	1130	56	<b><u>343</u></b>	<b><u>1130</u></b>	343	1130	342	1130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
QPI snoop mode: Cluster on Die  
COD Enable = Enabled, Early Snoop = Disabled  
CPU C1E Support = Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1100**

PRIMERGY RX2530 M1, Intel Xeon E5-2683 v3, 2.0 GHz

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 19

**Test date:** Mar-2015

**Test sponsor:** Fujitsu

**Hardware Availability:** Feb-2015

**Tested by:** Fujitsu

**Software Availability:** Nov-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1100**

PRIMERGY RX2530 M1, Intel Xeon E5-2683 v3, 2.0 GHz

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2015

**Hardware Availability:** Feb-2015

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1100**

PRIMERGY RX2530 M1, Intel Xeon E5-2683 v3, 2.0 GHz

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2015  
**Hardware Availability:** Feb-2015  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 19 18:13:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 May 2015.