



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint®\_rate2006 = 472

PRIMERGY BX2580 M1, Intel Xeon E5-2637 v3, 3.5 GHz

SPECint\_rate\_base2006 = 457

CPU2006 license: 19


Test date: Mar-2015

Test sponsor: Fujitsu

Hardware Availability: Mar-2015

Tested by: Fujitsu

Software Availability: Nov-2013

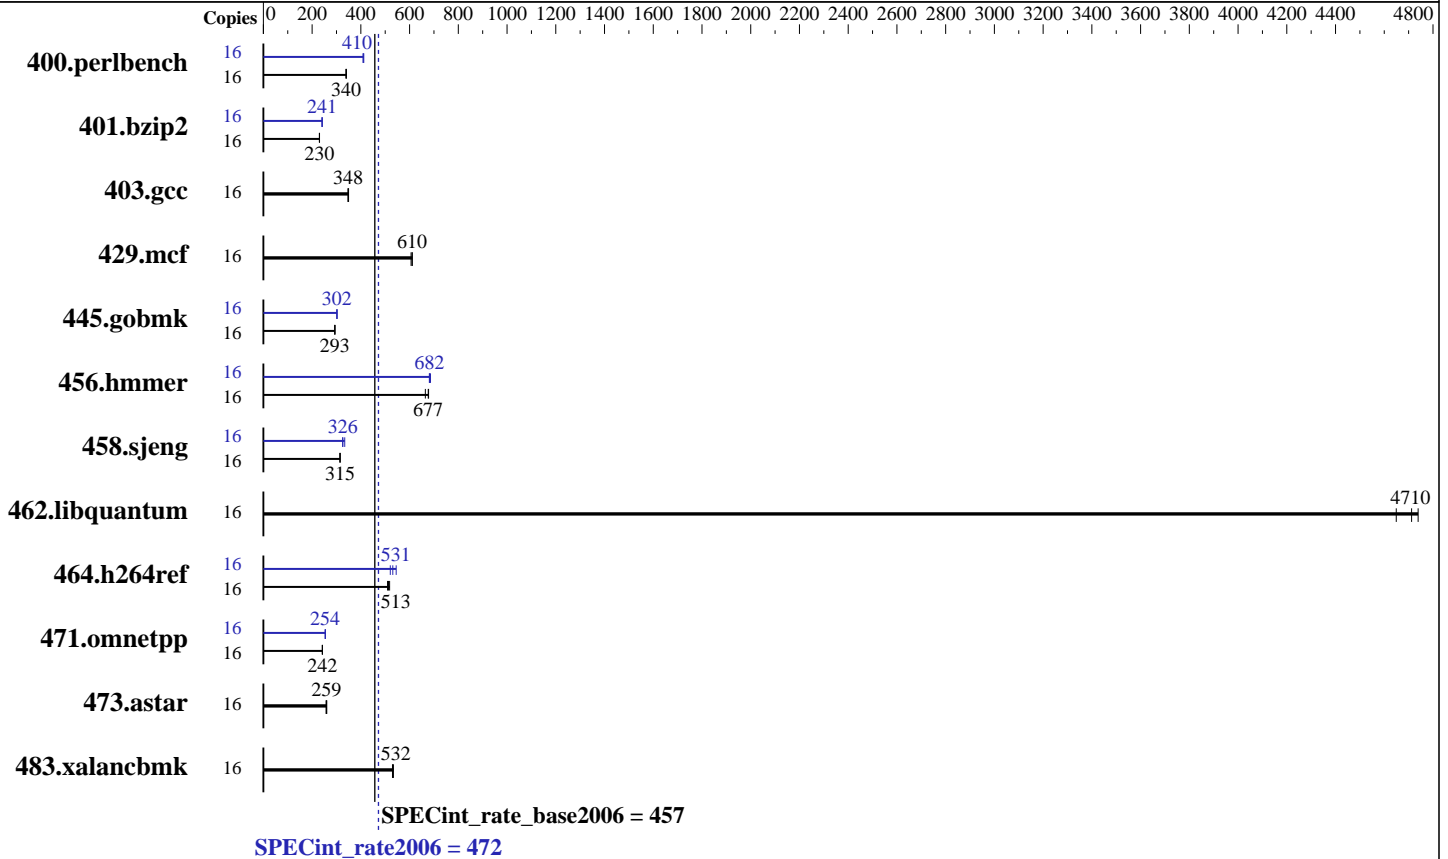

### Hardware

CPU Name: Intel Xeon E5-2637 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)  
 2.6.32-504.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 472

PRIMERGY BX2580 M1, Intel Xeon E5-2637 v3, 3.5 GHz

SPECint\_rate\_base2006 = 457

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2015  
Hardware Availability: Mar-2015  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b><u>460</u></b>	<b><u>340</u></b>	461	339	459	341	16	379	412	382	410	<b><u>382</u></b>	<b><u>410</u></b>
401.bzip2	16	<b><u>671</u></b>	<b><u>230</u></b>	671	230	670	230	16	640	241	641	241	<b><u>640</u></b>	<b><u>241</u></b>
403.gcc	16	368	350	371	348	<b><u>370</u></b>	<b><u>348</u></b>	16	368	350	371	348	<b><u>370</u></b>	<b><u>348</u></b>
429.mcf	16	239	611	<b><u>239</u></b>	<b><u>610</u></b>	241	606	16	239	611	<b><u>239</u></b>	<b><u>610</u></b>	241	606
445.gobmk	16	<b><u>572</u></b>	<b><u>293</u></b>	573	293	571	294	16	556	302	555	302	<b><u>556</u></b>	<b><u>302</u></b>
456.hammer	16	<b><u>221</u></b>	<b><u>677</u></b>	220	678	225	665	16	218	686	219	681	<b><u>219</u></b>	<b><u>682</u></b>
458.sjeng	16	<b><u>615</u></b>	<b><u>315</u></b>	615	315	616	314	16	595	325	580	334	<b><u>594</u></b>	<b><u>326</u></b>
462.libquantum	16	<b><u>70.4</u></b>	<b><u>4710</u></b>	70.0	4740	71.3	4650	16	<b><u>70.4</u></b>	<b><u>4710</u></b>	70.0	4740	71.3	4650
464.h264ref	16	695	510	683	518	<b><u>690</u></b>	<b><u>513</u></b>	16	650	545	<b><u>667</u></b>	<b><u>531</u></b>	680	521
471.omnetpp	16	413	242	<b><u>413</u></b>	<b><u>242</u></b>	413	242	16	<b><u>393</u></b>	<b><u>254</u></b>	394	254	393	254
473.astar	16	436	257	<b><u>434</u></b>	<b><u>259</u></b>	432	260	16	436	257	<b><u>434</u></b>	<b><u>259</u></b>	432	260
483.xalancbmk	16	208	530	<b><u>208</u></b>	<b><u>532</u></b>	207	533	16	208	530	<b><u>208</u></b>	<b><u>532</u></b>	207	533

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced  
QPI snoop mode: Early Snoop  
COD Enable = Disabled, Early Snoop = Enabled  
CPU C1E Support = Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 472**

PRIMERGY BX2580 M1, Intel Xeon E5-2637 v3, 3.5 GHz

**SPECint\_rate\_base2006 = 457**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2015

**Hardware Availability:** Mar-2015

**Software Availability:** Nov-2013

## General Notes (Continued)

Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 472**

PRIMERGY BX2580 M1, Intel Xeon E5-2637 v3, 3.5 GHz

**SPECint\_rate\_base2006 = 457**

**CPU2006 license:** 19

**Test date:** Mar-2015

**Test sponsor:** Fujitsu

**Hardware Availability:** Mar-2015

**Tested by:** Fujitsu

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 472**

PRIMERGY BX2580 M1, Intel Xeon E5-2637 v3, 3.5 GHz

**SPECint\_rate\_base2006 = 457**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2015

**Hardware Availability:** Mar-2015

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 19 18:15:30 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 May 2015.