SPEC® CINT2006 Result

Dell Inc.

PowerEdge FC830 (Intel Xeon E5-4640 v3, 1.90 GHz)

SPECint®_rate2006 = 1610

SPECint_rate_base2006 = 1550

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2015
Hardware Availability: Jun-2015
Software Availability: Jun-2015

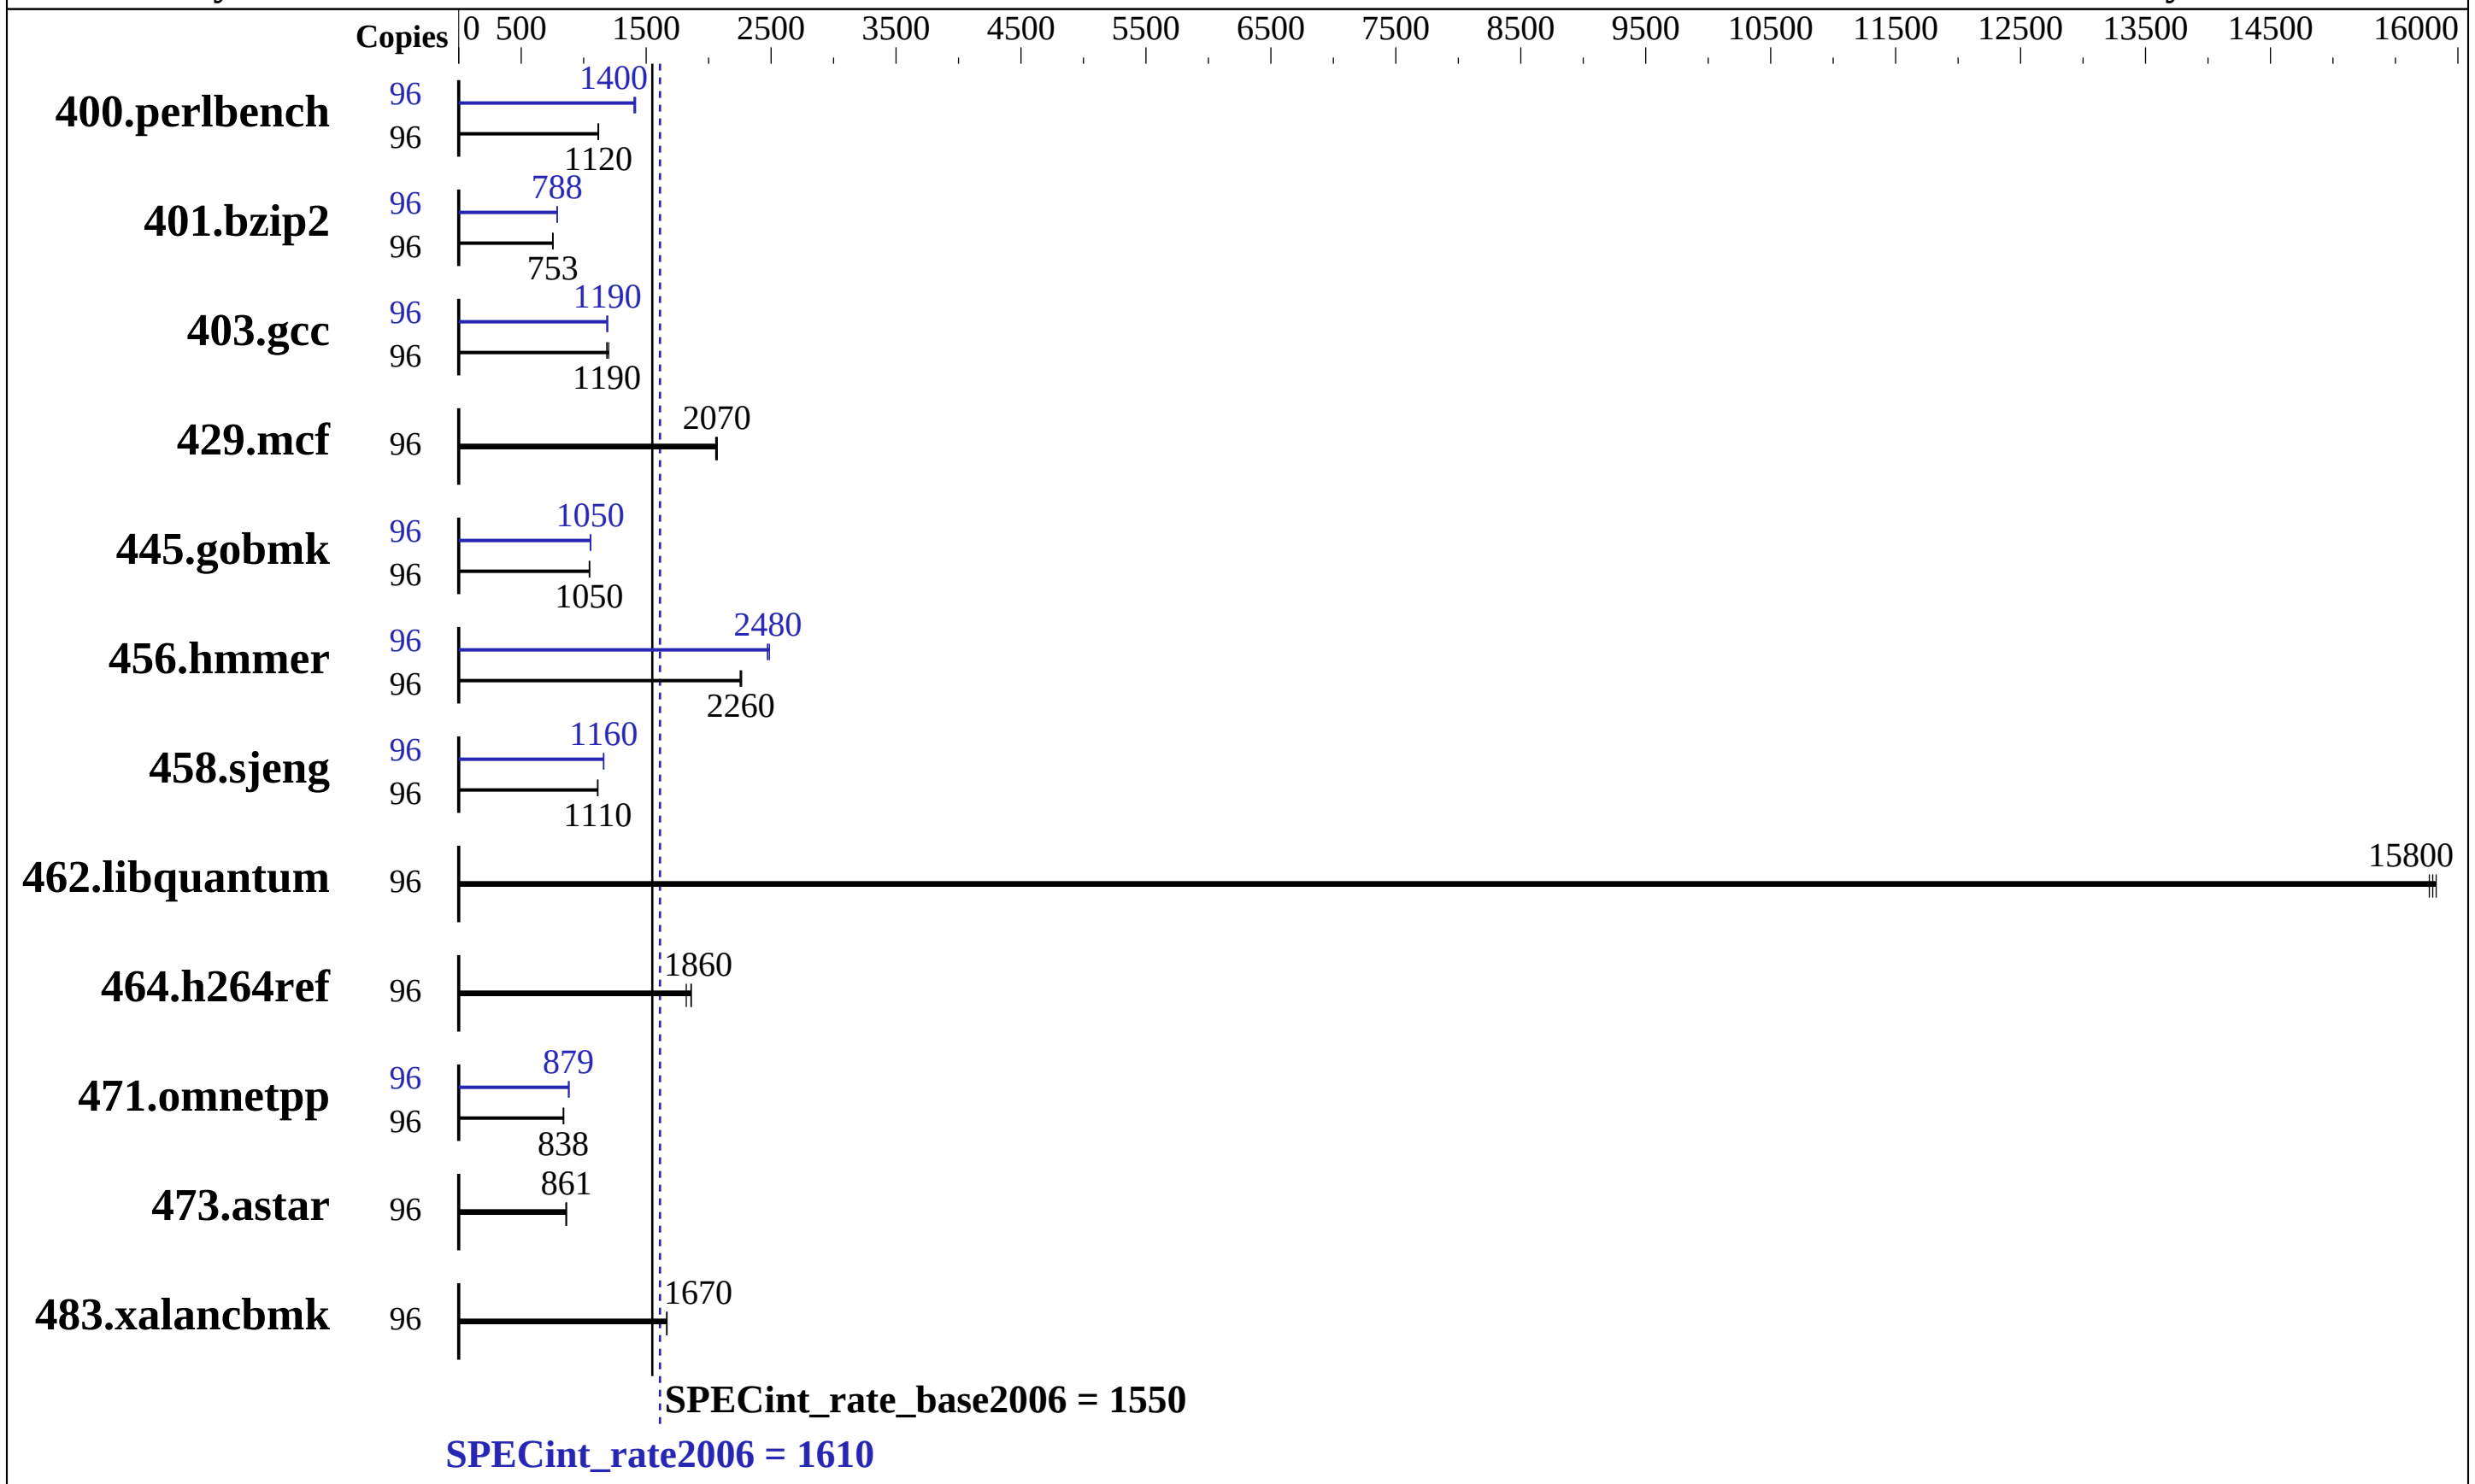

Hardware

CPU Name:	Intel Xeon E5-4640 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	1 x 400 GB 7200 RPM SATA
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Dell Inc.

PowerEdge FC830 (Intel Xeon E5-4640 v3, 1.90 GHz)

SPECint_rate2006 = 1610

SPECint_rate_base2006 = 1550

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2015
Hardware Availability: Jun-2015
Software Availability: Jun-2015

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	96	838	1120	**840**	**1120**	841	1120	96	**668**	**1400**	668	1400	663	1420
401.bzip2	96	**1230**	**753**	1229	754	1232	752	96	**1176**	**788**	1178	787	1174	789
403.gcc	96	**651**	**1190**	644	1200	651	1190	96	652	1180	648	1190	**649**	**1190**
429.mcf	96	426	2060	423	2070	**424**	**2070**	96	426	2060	423	2070	**424**	**2070**
445.gobmk	96	961	1050	**963**	**1050**	964	1040	96	954	1060	955	1050	**955**	**1050**
456.hmmer	96	396	2260	398	2250	**397**	**2260**	96	**362**	**2480**	360	2490	363	2470
458.sjeng	96	**1044**	**1110**	1043	1110	1044	1110	96	1002	1160	1000	1160	**1001**	**1160**
462.libquantum	96	126	15800	126	15800	**126**	**15800**	96	126	15800	126	15800	**126**	**15800**
464.h264ref	96	1141	1860	**1143**	**1860**	1167	1820	96	1141	1860	**1143**	**1860**	1167	1820
471.omnetpp	96	714	841	716	838	**716**	**838**	96	**682**	**879**	679	884	682	879
473.astar	96	781	862	786	857	**782**	**861**	96	781	862	786	857	**782**	**861**
483.xalancbmk	96	397	1670	**398**	**1670**	398	1670	96	397	1670	**398**	**1670**	398	1670

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Snoop Mode set to Early Snoop
Virtualization Technology disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-3aq4 Mon Jan 26 22:19:04 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4640 v3 @ 1.90GHz
      4 "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 12
         siblings  : 24
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
      cache size : 30720 KB

   From /proc/meminfo
      MemTotal:       529334376 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 0
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12"
         VERSION_ID="12"
         PRETTY_NAME="SUSE Linux Enterprise Server 12"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12"

   uname -a:
      Linux linux-3aq4 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
      (9879bd4) x86_64 x86_64 x86_64 GNU/Linux


   SPEC is set to: /root/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      ext4  267G  110G  156G  42% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Dell Inc. 0.4.0 01/08/2015
     Memory:
```

Continued on next page

Platform Notes (Continued)

```
    3x 00AD063200AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1867
    MHz
    29x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1867
    MHz
    16x Not Specified Not Specified

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 12:38:43 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.