



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hypertechnologies Ciara, Inc Orion HF620-G3

SPECfp®\_rate2006 = 692

SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531


Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

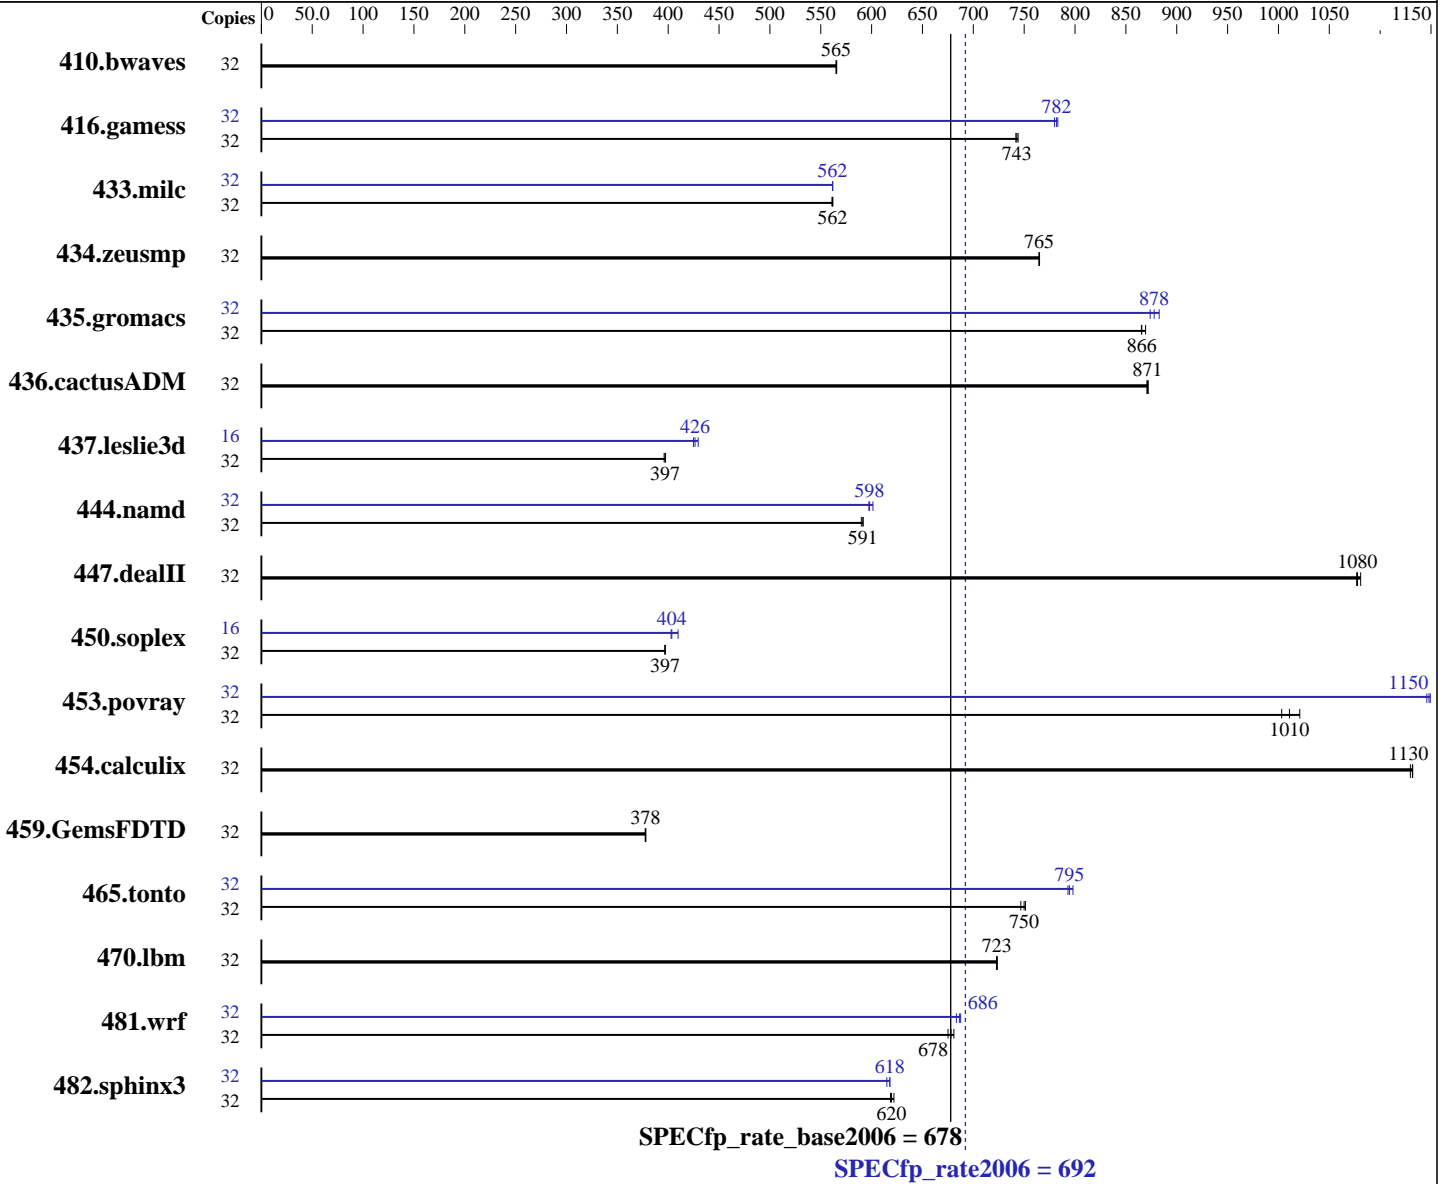

### Hardware

CPU Name: Intel Xeon E5-2667 v3  
 CPU Characteristics: Intel Turbo Boost Technology disabled  
 CPU MHz: 3328  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-121.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692  
SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1x 240 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	769	566	770	565	<b>769</b>	<b>565</b>	32	769	566	770	565	<b>769</b>	<b>565</b>
416.gamess	32	842	744	845	742	<b>844</b>	<b>743</b>	32	<b>802</b>	<b>782</b>	803	780	800	783
433.milc	32	523	562	<b>523</b>	<b>562</b>	524	561	32	523	561	<b>523</b>	<b>562</b>	523	562
434.zeusmp	32	381	765	381	765	<b>381</b>	<b>765</b>	32	381	765	381	765	<b>381</b>	<b>765</b>
435.gromacs	32	264	865	263	869	<b>264</b>	<b>866</b>	32	<b>260</b>	<b>878</b>	261	874	259	883
436.cactusADM	32	439	871	<b>439</b>	<b>871</b>	439	872	32	439	871	<b>439</b>	<b>871</b>	439	872
437.leslie3d	32	760	396	<b>758</b>	<b>397</b>	757	397	16	<b>353</b>	<b>426</b>	354	425	350	429
444.namd	32	<b>434</b>	<b>591</b>	434	592	435	590	32	<b>429</b>	<b>598</b>	430	597	427	601
447.dealII	32	<b>340</b>	<b>1080</b>	340	1080	339	1080	32	<b>340</b>	<b>1080</b>	340	1080	339	1080
450.soplex	32	<b>672</b>	<b>397</b>	673	397	672	397	16	331	403	<b>331</b>	<b>404</b>	326	410
453.povray	32	170	1000	167	1020	<b>168</b>	<b>1010</b>	32	<b>148</b>	<b>1150</b>	148	1150	149	1150
454.calculix	32	<b>233</b>	<b>1130</b>	233	1130	234	1130	32	<b>233</b>	<b>1130</b>	233	1130	234	1130
459.GemsFDTD	32	<b>899</b>	<b>378</b>	900	377	898	378	32	<b>899</b>	<b>378</b>	900	377	898	378
465.tonto	32	419	751	<b>420</b>	<b>750</b>	422	747	32	397	793	<b>396</b>	<b>795</b>	395	798
470.lbm	32	608	724	608	723	<b>608</b>	<b>723</b>	32	608	724	608	723	<b>608</b>	<b>723</b>
481.wrf	32	525	681	529	675	<b>527</b>	<b>678</b>	32	520	688	523	683	<b>521</b>	<b>686</b>
482.sphinx3	32	1008	619	<b>1007</b>	<b>620</b>	1003	622	32	1009	618	1014	615	<b>1009</b>	<b>618</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on orionhf620 Thu Nov 6 23:58:34 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692  
SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      131720292 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux orionhf620 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 6 14:51 last=5

SPEC is set to: /usr/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb3        xfs       233G   50G  184G  22% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692

SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

## Platform Notes (Continued)

BIOS American Megatrends Inc. 0402 09/09/2014

Memory:

8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB

8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692

SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

## Base Portability Flags (Continued)

```
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

### C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

### Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

### Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

### C benchmarks:

```
icc -m64
```

### C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

### Fortran benchmarks:

```
ifort -m64
```

### Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692

SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692

SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc  
Orion HF620-G3

SPECfp\_rate2006 = 692

SPECfp\_rate\_base2006 = 678

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Nov-2014

Hardware Availability: Dec-2014

Software Availability: Aug-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jun 17 10:47:41 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 June 2015.