



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate2006 = 977**

**SPECint\_rate\_base2006 = 939**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

**Test date:** May-2015

**Hardware Availability:** Oct-2014

**Software Availability:** Sep-2014

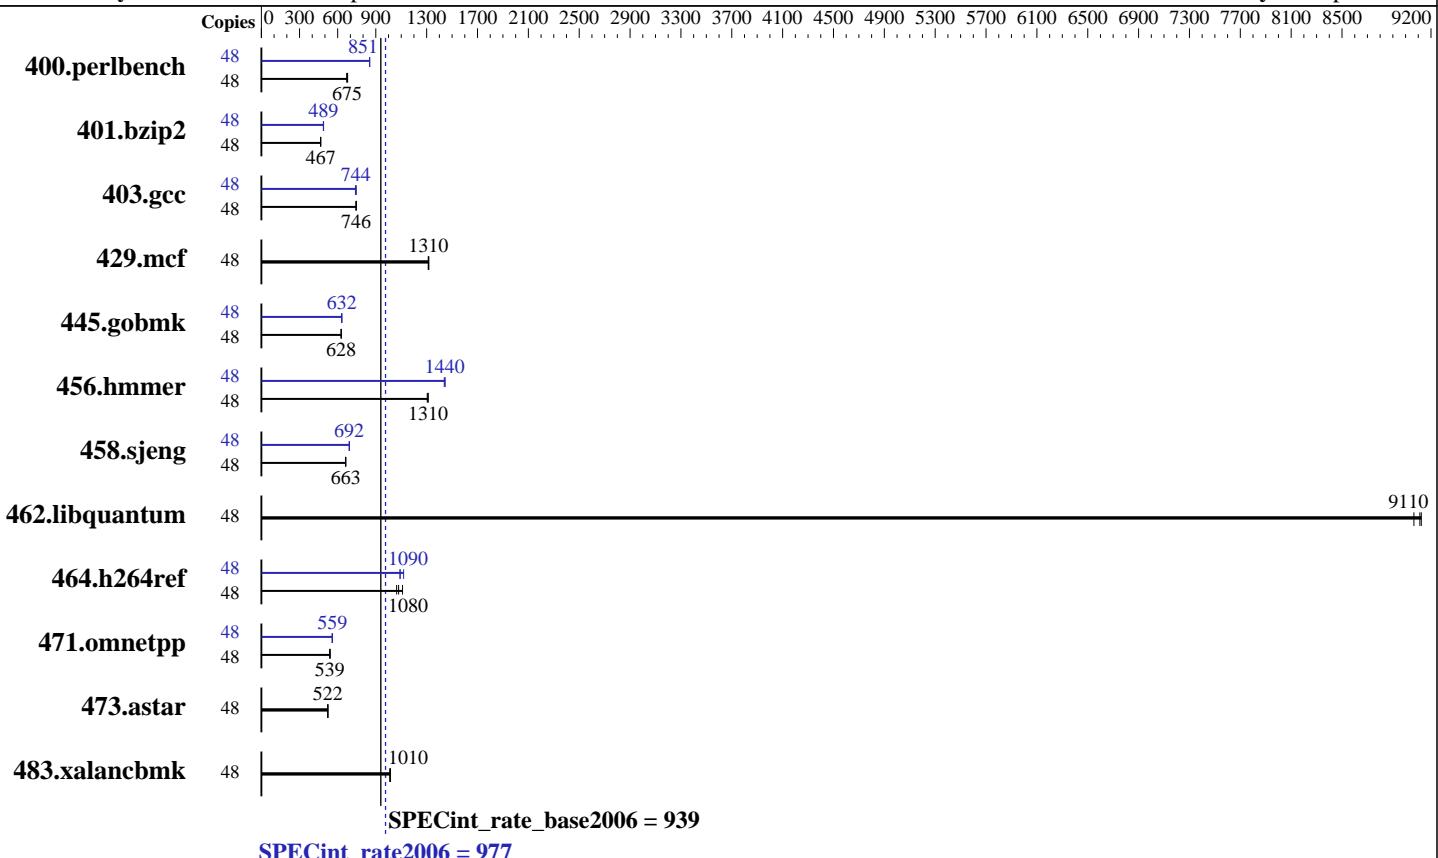

### Hardware

CPU Name: Intel Xeon E5-2658 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: 3.10.0-123.el7.x86\_64  
Auto Parallel: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate2006 = 977**

**SPECint\_rate\_base2006 = 939**

CPU2006 license: 9017

Test date: May-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	691	678	699	671	<b>694</b>	<b>675</b>	48	550	853	551	851	<b>551</b>	<b>851</b>
401.bzip2	48	<b>993</b>	<b>467</b>	992	467	995	466	48	<b>947</b>	<b>489</b>	947	489	950	487
403.gcc	48	517	747	<b>518</b>	<b>746</b>	520	744	48	522	740	<b>520</b>	<b>744</b>	518	746
429.mcf	48	332	1320	333	1310	<b>333</b>	<b>1310</b>	48	332	1320	333	1310	<b>333</b>	<b>1310</b>
445.gobmk	48	802	628	<b>802</b>	<b>628</b>	802	627	48	<b>796</b>	<b>632</b>	796	632	797	632
456.hammer	48	<b>342</b>	<b>1310</b>	341	1310	343	1300	48	311	1440	310	1440	<b>310</b>	<b>1440</b>
458.sjeng	48	875	664	876	663	<b>876</b>	<b>663</b>	48	<b>840</b>	<b>692</b>	840	692	840	692
462.libquantum	48	109	9120	110	9070	<b>109</b>	<b>9110</b>	48	109	9120	110	9070	<b>109</b>	<b>9110</b>
464.h264ref	48	<b>984</b>	<b>1080</b>	957	1110	998	1060	48	974	1090	949	1120	<b>973</b>	<b>1090</b>
471.omnetpp	48	558	537	555	541	<b>557</b>	<b>539</b>	48	<b>537</b>	<b>559</b>	536	560	540	556
473.astar	48	643	524	<b>646</b>	<b>522</b>	646	522	48	643	524	<b>646</b>	<b>522</b>	646	522
483.xalancbmk	48	<b>327</b>	<b>1010</b>	326	1010	328	1010	48	<b>327</b>	<b>1010</b>	326	1010	328	1010

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Operating Mode set to "Efficiency-Favor Performance"

Sysinfo program /home/SPEC/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1  
running on x3550m5.labs.lenovo.com Tue May 5 00:31:32 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2658 v3 @ 2.20GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate2006 = 977**

**SPECint\_rate\_base2006 = 939**

**CPU2006 license:** 9017

**Test date:** May-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Platform Notes (Continued)

```
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB

From /proc/meminfo
MemTotal:      263446676 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
Linux x3550m5.labs.lenovo.com 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

SPEC is set to: /home/SPEC
Filesystem           Type    Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs    275G   28G  248G  11% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TBE105KUS-1.10]- 04/17/2015
Memory:
 14x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
 2x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
 8x NO DIMM Unknown

(End of data from sysinfo program)
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate2006 = 977**

**SPECint\_rate\_base2006 = 939**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** May-2015

**Hardware Availability:** Oct-2014

**Software Availability:** Sep-2014

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB

memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate2006 = 977**

**SPECint\_rate\_base2006 = 939**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** May-2015

**Hardware Availability:** Oct-2014

**Software Availability:** Sep-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECint\_rate2006 = 977**

**SPECint\_rate\_base2006 = 939**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** May-2015

**Hardware Availability:** Oct-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:45:21 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.