



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp®_rate2006 = 939

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = 921

CPU2006 license: 9017


Test date: Apr-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

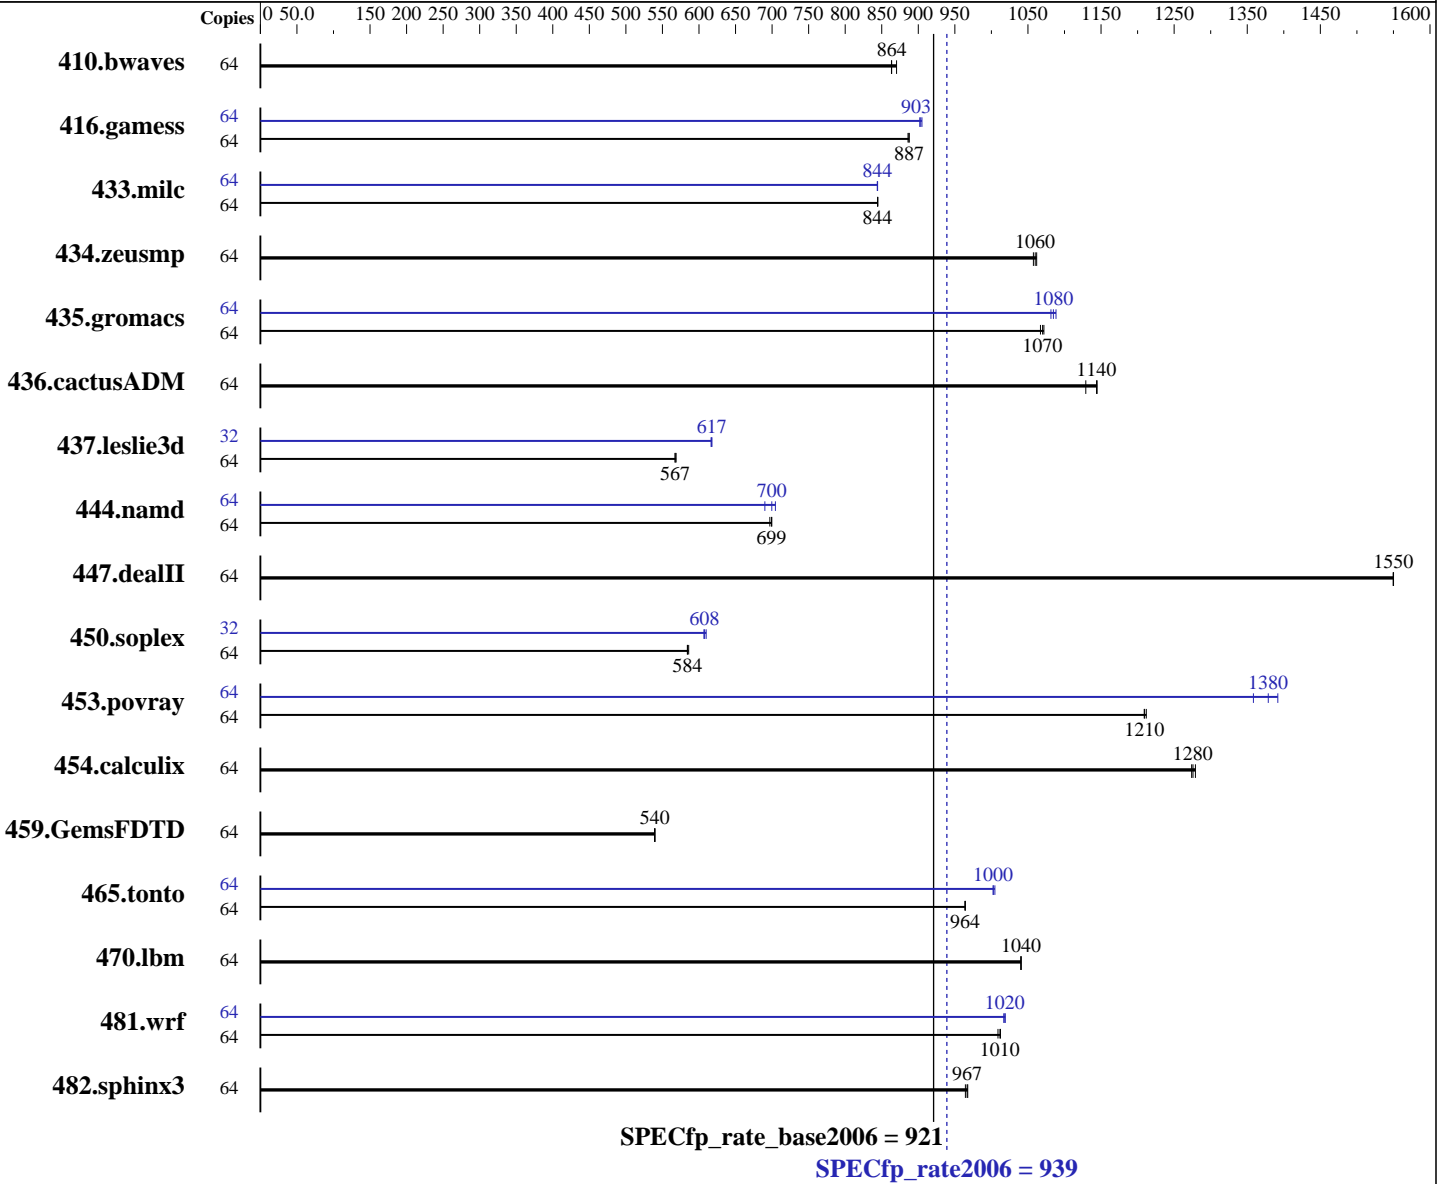

Hardware

CPU Name: Intel Xeon E5-4610 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = **939**

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = **921**

CPU2006 license: 9017

Test date: Apr-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 300 GB SAS, 15000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	1007	864	999	870	1007	863	64	1007	864	999	870	1007	863		
416.gamess	64	1412	887	1412	887	1414	886	64	1387	903	1389	902	1385	905		
433.milc	64	696	844	695	845	696	844	64	696	844	696	844	696	844		
434.zeusmp	64	551	1060	548	1060	549	1060	64	551	1060	548	1060	549	1060		
435.gromacs	64	426	1070	428	1070	427	1070	64	420	1090	423	1080	421	1080		
436.cactusADM	64	668	1140	677	1130	669	1140	64	668	1140	677	1130	669	1140		
437.leslie3d	64	1058	569	1060	567	1060	567	32	487	618	487	617	488	617		
444.namd	64	734	699	734	699	736	697	64	729	705	734	700	744	690		
447.dealII	64	472	1550	472	1550	472	1550	64	472	1550	472	1550	472	1550		
450.soplex	64	914	584	914	584	911	586	32	438	610	439	608	440	607		
453.povray	64	281	1210	282	1210	281	1210	64	245	1390	247	1380	251	1360		
454.calculix	64	414	1270	413	1280	414	1280	64	414	1270	413	1280	414	1280		
459.GemsFDTD	64	1258	540	1259	539	1258	540	64	1258	540	1259	539	1258	540		
465.tonto	64	653	964	653	964	653	964	64	628	1000	628	1000	627	1000		
470.lbm	64	845	1040	845	1040	845	1040	64	845	1040	845	1040	845	1040		
481.wrf	64	708	1010	706	1010	707	1010	64	702	1020	703	1020	702	1020		
482.sphinx3	64	1293	964	1289	968	1290	967	64	1293	964	1289	968	1290	967		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 939

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = 921

CPU2006 license: 9017

Test date: Apr-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Platform Notes

Operating Mode set to Maximum Performance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sun Apr 12 09:25:44 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4610 v2 @ 2.30GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal: 529406328 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 11 19:37 last=5
```

```
SPEC is set to: /cpu2006.1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root ext4 265G 7.9G 244G 4% /
```

```
Additional information from dmidecode:
BIOS IBM -[CGE103GUS-1.10]- 03/06/2015
Memory:
31x Micron 36JSF2G72PZ-1G9E1 16 GB 1600 MHz 2 rank
16x Not Specified Not Specified
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 939

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = 921

CPU2006 license: 9017

Test date: Apr-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Platform Notes (Continued)

1x Samsung M393B2G70QH0-CMA 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 939

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = 921

CPU2006 license: 9017

Test date: Apr-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 939

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = 921

CPU2006 license: 9017

Test date: Apr-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 939

IBM Flex System x440
(Intel Xeon E5-4610 v2, 2.70 GHz)

SPECfp_rate_base2006 = 921

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Apr-2015

Hardware Availability: Dec-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:48:32 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.