



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 2640

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate_base2006 = 2550

CPU2006 license: 3


Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

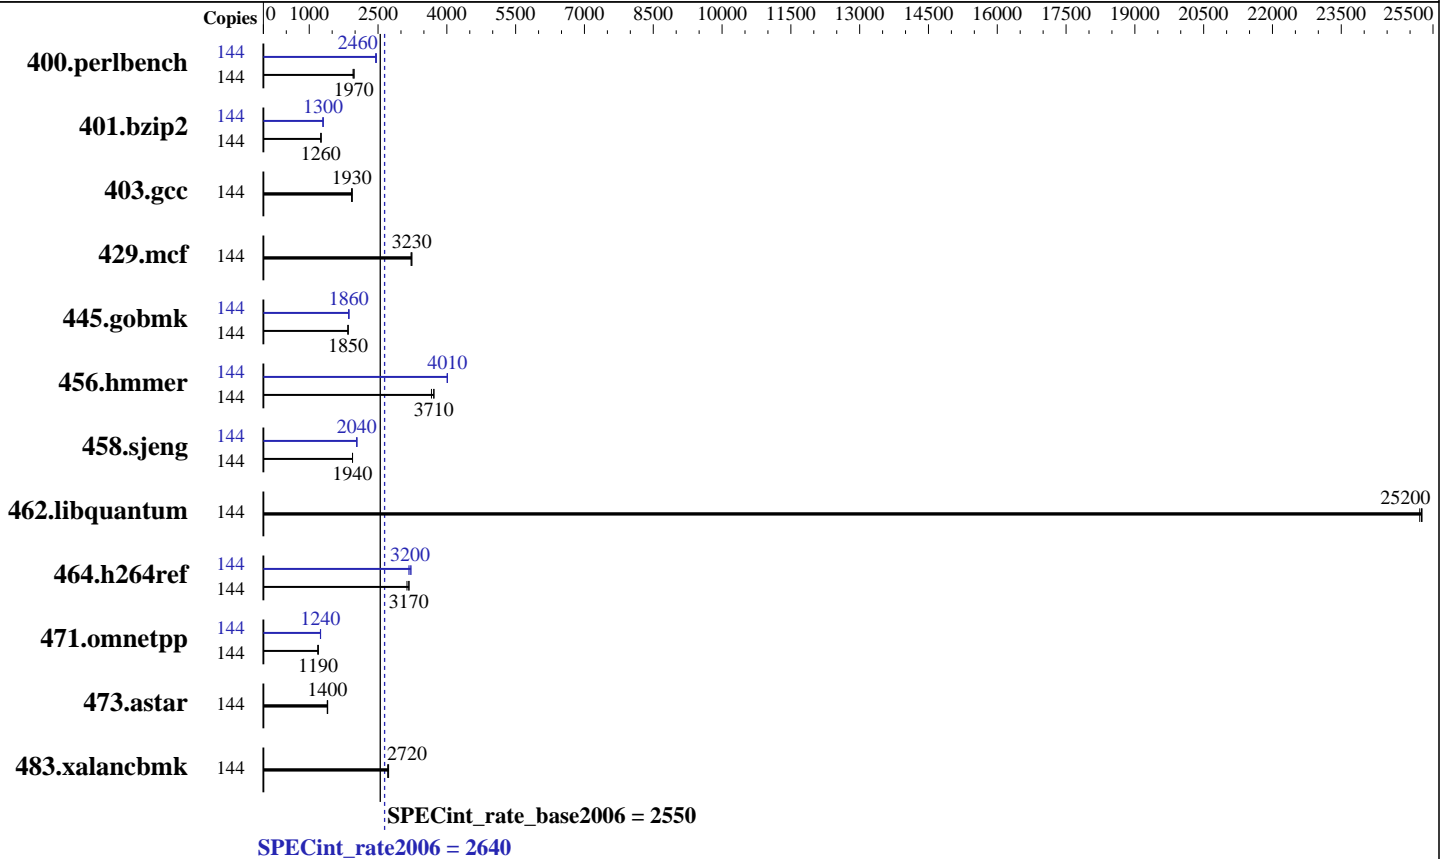

Hardware

CPU Name: Intel Xeon E7-8870 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2640

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate_base2006 = 2550

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	712	1980	<u>712</u>	<u>1970</u>	720	1950	144	<u>573</u>	<u>2460</u>	571	2460	575	2450
401.bzip2	144	1105	1260	<u>1106</u>	<u>1260</u>	1109	1250	144	1070	1300	1066	1300	<u>1067</u>	<u>1300</u>
403.gcc	144	598	1940	<u>601</u>	<u>1930</u>	603	1920	144	598	1940	<u>601</u>	<u>1930</u>	603	1920
429.mcf	144	408	3220	406	3240	<u>406</u>	<u>3230</u>	144	408	3220	406	3240	<u>406</u>	<u>3230</u>
445.gobmk	144	<u>818</u>	<u>1850</u>	819	1840	818	1850	144	810	1870	812	1860	<u>811</u>	<u>1860</u>
456.hammer	144	361	3720	367	3660	<u>362</u>	<u>3710</u>	144	335	4010	<u>335</u>	<u>4010</u>	335	4010
458.sjeng	144	897	1940	897	1940	<u>897</u>	<u>1940</u>	144	<u>855</u>	<u>2040</u>	856	2040	855	2040
462.libquantum	144	118	25300	<u>118</u>	<u>25200</u>	118	25200	144	118	25300	<u>118</u>	<u>25200</u>	118	25200
464.h264ref	144	<u>1006</u>	<u>3170</u>	1018	3130	1003	3180	144	1004	3170	990	3220	<u>996</u>	<u>3200</u>
471.omnetpp	144	<u>754</u>	<u>1190</u>	752	1200	758	1190	144	723	1240	721	1250	<u>723</u>	<u>1240</u>
473.astar	144	725	1390	<u>724</u>	<u>1400</u>	721	1400	144	725	1390	<u>724</u>	<u>1400</u>	721	1400
483.xalancbmk	144	366	2710	364	2730	<u>365</u>	<u>2720</u>	144	366	2710	364	2730	<u>365</u>	<u>2720</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Platform Notes

BIOS Configuration
Power Profile set to Custom
Power Regulator set to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2640

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate_base2006 = 2550

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

Platform Notes (Continued)

Sysinfo program /cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-t8cw Tue May 5 19:13:07 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8870 v3 @ 2.10GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal: 529309776 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-t8cw 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 5 18:24

SPEC is set to: /cpu2006

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2640

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate_base2006 = 2550

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	371G	189G	182G	51%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 03/13/2015

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2640

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate_base2006 = 2550

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2640

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate_base2006 = 2550

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen9
(2.10 GHz, Intel Xeon E7-8870 v3)

SPECint_rate2006 = 2640

SPECint_rate_base2006 = 2550

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:48:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.