



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3


Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

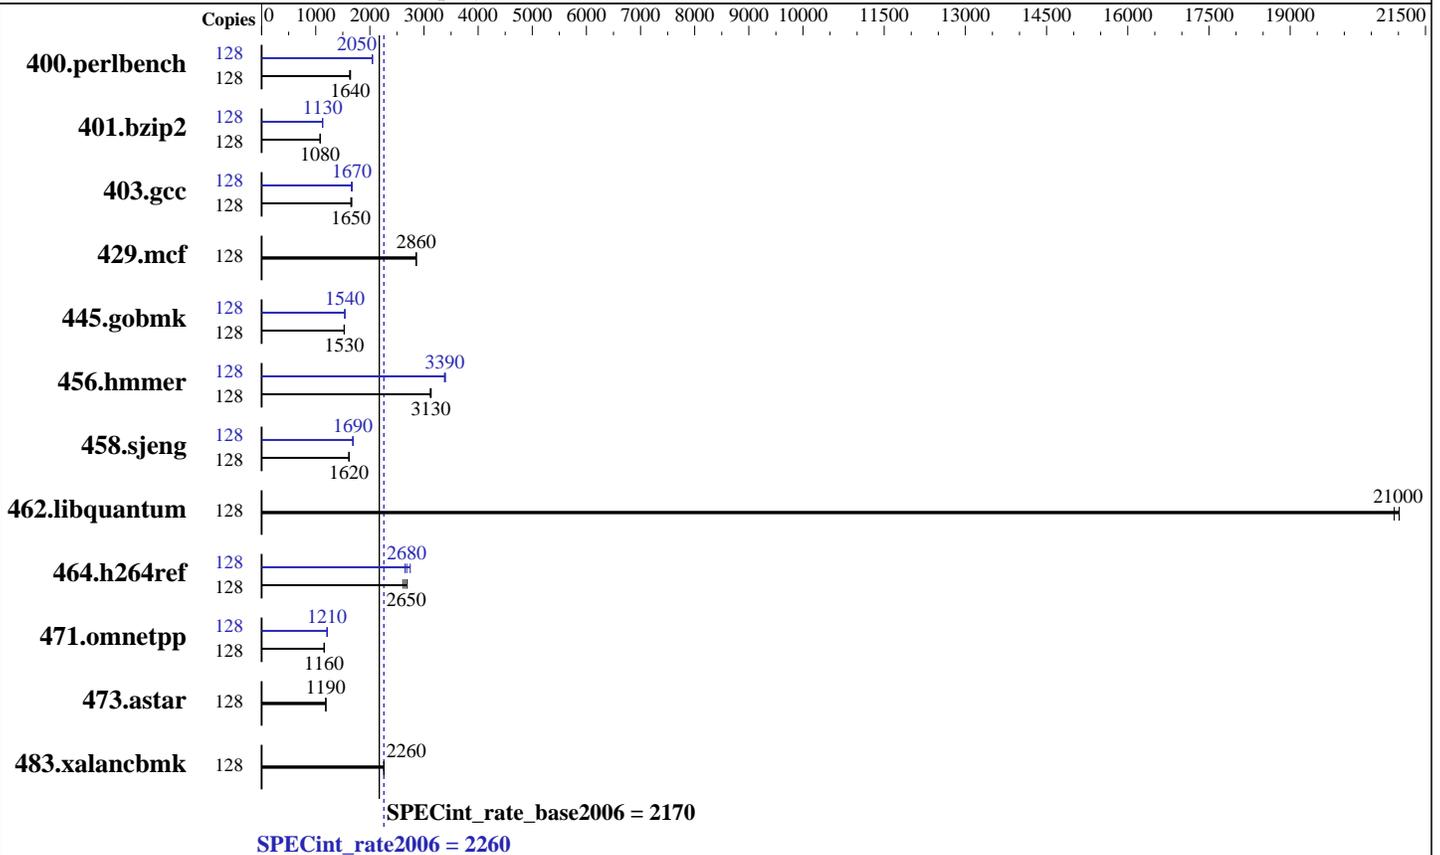

Hardware

CPU Name: Intel Xeon E5-4667 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 40 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	769	1630	<u>763</u>	<u>1640</u>	761	1640	128	<u>611</u>	<u>2050</u>	610	2050	612	2040
401.bzip2	128	1140	1080	1143	1080	<u>1141</u>	<u>1080</u>	128	<u>1096</u>	<u>1130</u>	1095	1130	1098	1130
403.gcc	128	624	1650	<u>623</u>	<u>1650</u>	618	1670	128	621	1660	<u>617</u>	<u>1670</u>	616	1670
429.mcf	128	408	2860	409	2850	<u>409</u>	<u>2860</u>	128	408	2860	409	2850	<u>409</u>	<u>2860</u>
445.gobmk	128	879	1530	881	1520	<u>880</u>	<u>1530</u>	128	873	1540	874	1540	<u>873</u>	<u>1540</u>
456.hammer	128	383	3110	381	3130	<u>382</u>	<u>3130</u>	128	352	3400	354	3380	<u>353</u>	<u>3390</u>
458.sjeng	128	<u>959</u>	<u>1620</u>	958	1620	960	1610	128	918	1690	918	1690	<u>918</u>	<u>1690</u>
462.libquantum	128	126	21000	127	20900	<u>126</u>	<u>21000</u>	128	126	21000	127	20900	<u>126</u>	<u>21000</u>
464.h264ref	128	1054	2690	1083	2620	<u>1068</u>	<u>2650</u>	128	<u>1057</u>	<u>2680</u>	1069	2650	1032	2750
471.omnetpp	128	693	1150	<u>691</u>	<u>1160</u>	690	1160	128	663	1210	659	1210	<u>661</u>	<u>1210</u>
473.astar	128	<u>758</u>	<u>1190</u>	758	1180	757	1190	128	<u>758</u>	<u>1190</u>	758	1180	757	1190
483.xalancbmk	128	391	2260	<u>391</u>	<u>2260</u>	390	2260	128	391	2260	<u>391</u>	<u>2260</u>	390	2260

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Platform Notes

BIOS Configuration
Power Profile set to Custom
Power Regulator set to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Enabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes (Continued)

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on dl560gen9jks Fri May 15 12:30:58 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4667 v3 @ 2.00GHz
 4 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 40960 KB
```

```
From /proc/meminfo
MemTotal:      529302784 kB
HugePages_Total:      0
Hugepagesize:   2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux dl560gen9jks 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes (Continued)

run-level 3 May 15 12:29 last=5

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	6.0G	325G	2%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P85 03/05/2015

Memory:

24x HP 752369-081 16 GB 2 rank 2133 MHz

16x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

24x HP 752369-081 16 GB 2 rank 2133 MHz

8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 2260

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4667 v3)

SPECint_rate_base2006 = 2170

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 13:49:23 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.