



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

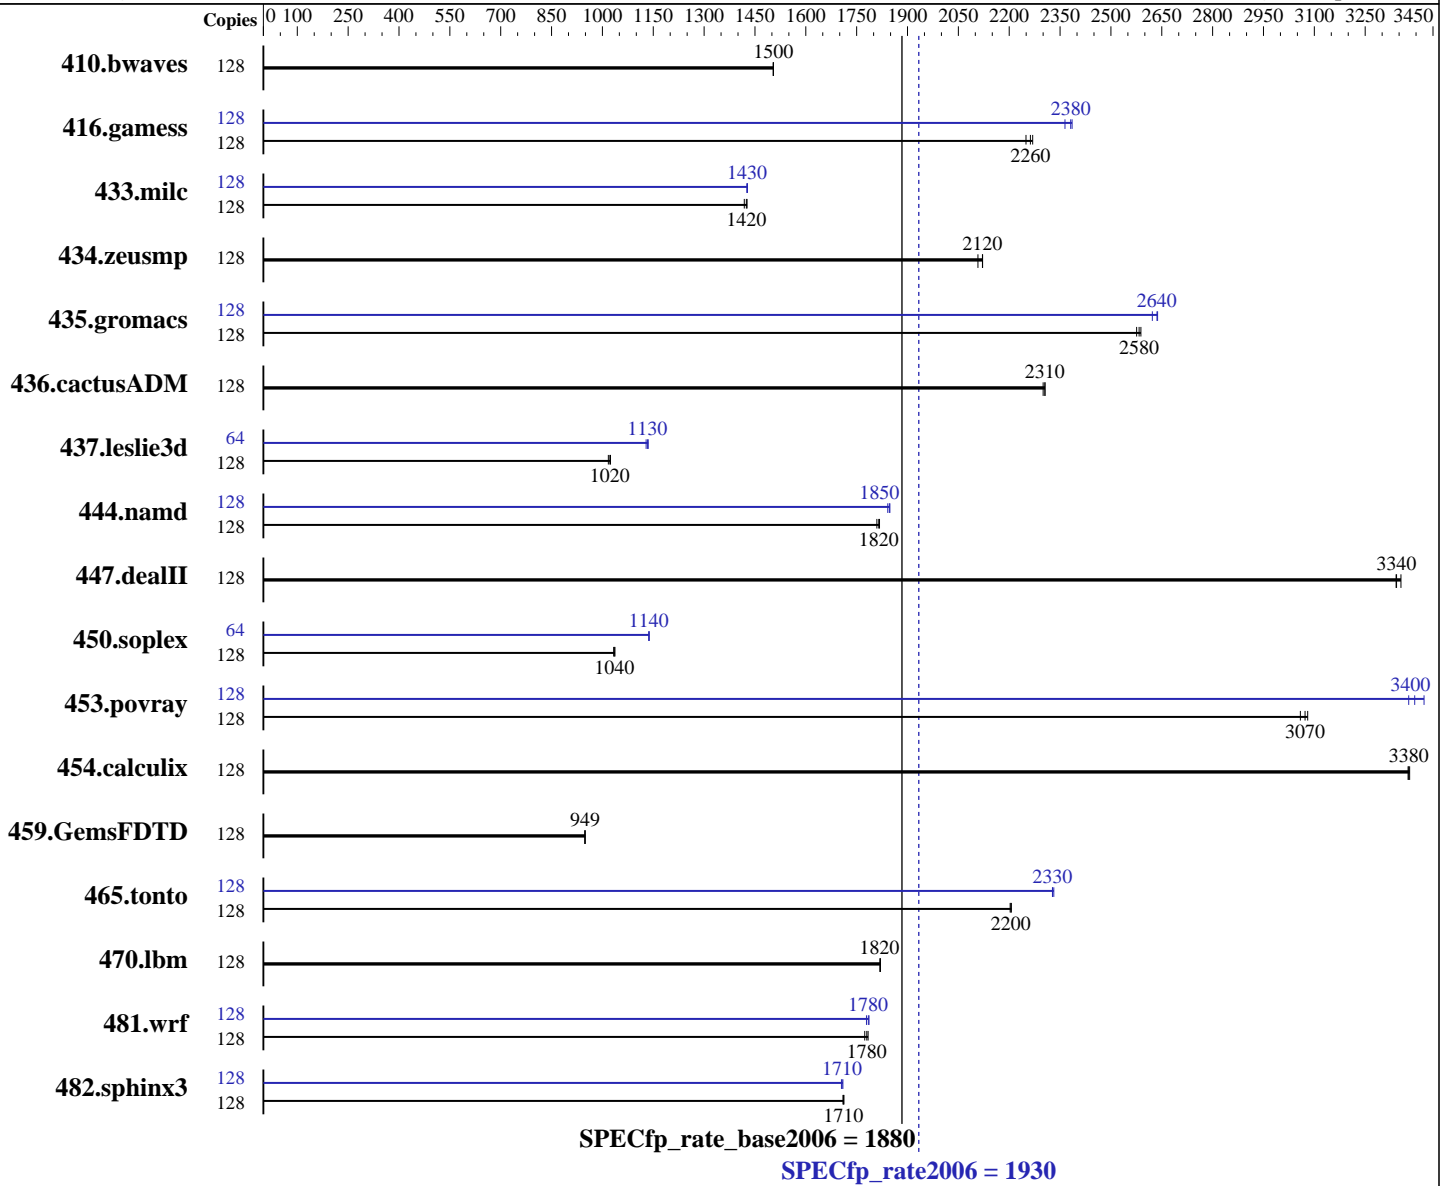

Hardware

CPU Name: Intel Xeon E7-8867 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 2 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1156	1500	1157	1500	1156	1500	128	1156	1500	1157	1500	1156	1500
416.gamess	128	1114	2250	1104	2270	1108	2260	128	1051	2390	1052	2380	1060	2360
433.milc	128	828	1420	825	1420	824	1430	128	823	1430	823	1430	824	1430
434.zeusmp	128	553	2110	549	2120	549	2120	128	553	2110	549	2120	549	2120
435.gromacs	128	354	2580	355	2580	353	2590	128	349	2620	347	2640	346	2640
436.cactusADM	128	665	2300	663	2310	664	2310	128	665	2300	663	2310	664	2310
437.leslie3d	128	1177	1020	1183	1020	1175	1020	64	533	1130	531	1130	530	1140
444.namd	128	567	1810	565	1820	566	1820	128	555	1850	556	1850	557	1840
447.dealII	128	436	3360	438	3340	438	3340	128	436	3360	438	3340	438	3340
450.soplex	128	1031	1040	1033	1030	1029	1040	64	469	1140	469	1140	469	1140
453.povray	128	221	3080	222	3070	223	3060	128	201	3400	199	3420	202	3380
454.calculix	128	313	3380	312	3380	313	3380	128	313	3380	312	3380	313	3380
459.GemsFDTD	128	1431	949	1432	948	1431	949	128	1431	949	1432	948	1431	949
465.tonto	128	572	2200	571	2200	571	2210	128	540	2330	541	2330	541	2330
470.lbm	128	966	1820	967	1820	967	1820	128	966	1820	967	1820	967	1820
481.wrf	128	802	1780	806	1770	803	1780	128	801	1780	800	1790	804	1780
482.sphinx3	128	1459	1710	1457	1710	1458	1710	128	1462	1710	1459	1710	1463	1710

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set DRAM Maintenance to Manual

Set DRAM Maintenance Mode to pTRR

Set Patrol Scrub to Enabled

Sysinfo program /spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1

running on rh5885hv3 Tue May 26 18:52:42 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8867 v3 @ 2.50GHz

4 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27

physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27

physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27

cache size : 46080 KB

From /proc/meminfo

MemTotal: 1056464084 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.0"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:

Linux rh5885hv3 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014

x86_64 x86_64 x86_64 GNU/Linux

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2015
Hardware Availability: May-2015
Software Availability: Sep-2014

Platform Notes (Continued)

run-level 3 May 26 06:14

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	342G	127G	216G	37%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV705 03/30/2015

Memory:

32x NO DIMM NO DIMM

64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 1 TB and the dmidecode description should have two lines reading as:

32x NO DIMM NO DIMM

64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175

Test date: May-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175

Test date: May-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1930

Huawei RH5885H V3 (Intel Xeon E7-8867 v3)

SPECfp_rate_base2006 = 1880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 17 10:48:32 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 June 2015.