



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint®\_rate2006 = 161

### CELSIUS C740, Intel Xeon E5-1603 v3, 2.8 GHz

### SPECint\_rate\_base2006 = 156

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

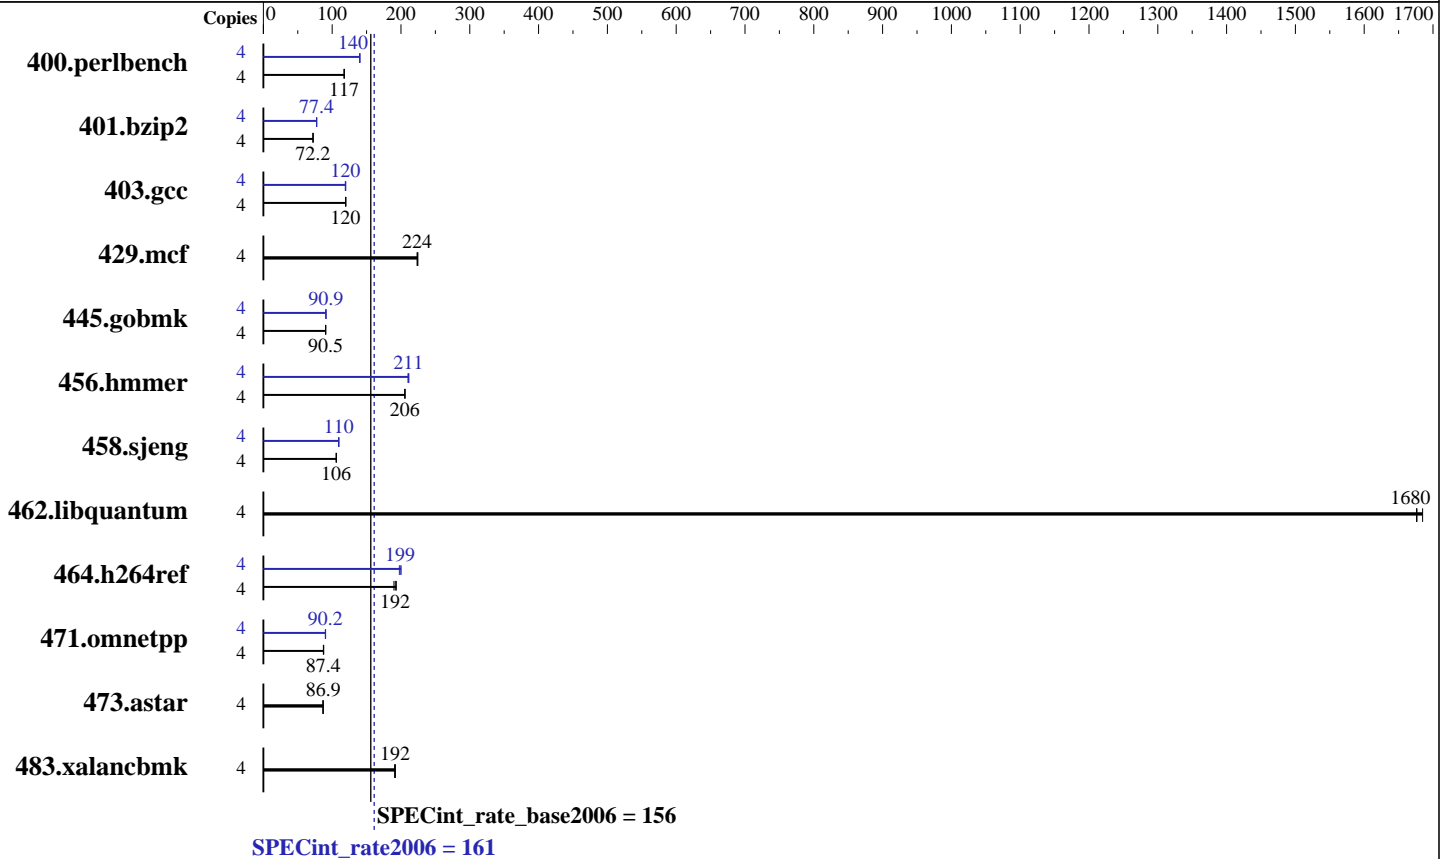

### Hardware

CPU Name: Intel Xeon E5-1603 v3  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 161

CELSIUS C740, Intel Xeon E5-1603 v3, 2.8 GHz

SPECint\_rate\_base2006 = 156

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2015  
Hardware Availability: May-2015  
Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b><u>333</u></b>	<b><u>117</u></b>	333	117	333	118	4	279	140	279	140	<b><u>279</u></b>	<b><u>140</u></b>
401.bzip2	4	<b><u>535</u></b>	<b><u>72.2</u></b>	534	72.3	535	72.1	4	499	77.4	<b><u>498</u></b>	<b><u>77.4</u></b>	498	77.5
403.gcc	4	269	120	269	120	<b><u>269</u></b>	<b><u>120</u></b>	4	269	120	270	119	<b><u>269</u></b>	<b><u>120</u></b>
429.mcf	4	163	224	162	225	<b><u>163</u></b>	<b><u>224</u></b>	4	163	224	162	225	<b><u>163</u></b>	<b><u>224</u></b>
445.gobmk	4	463	90.6	464	90.5	<b><u>464</u></b>	<b><u>90.5</u></b>	4	461	90.9	<b><u>462</u></b>	<b><u>90.9</u></b>	462	90.9
456.hammer	4	182	206	181	206	<b><u>181</u></b>	<b><u>206</u></b>	4	178	210	176	211	<b><u>177</u></b>	<b><u>211</u></b>
458.sjeng	4	457	106	457	106	<b><u>457</u></b>	<b><u>106</u></b>	4	443	109	441	110	<b><u>442</u></b>	<b><u>110</u></b>
462.libquantum	4	<b><u>49.4</u></b>	<b><u>1680</u></b>	49.2	1680	49.4	1680	4	<b><u>49.4</u></b>	<b><u>1680</u></b>	49.2	1680	49.4	1680
464.h264ref	4	458	193	466	190	<b><u>462</u></b>	<b><u>192</u></b>	4	442	200	448	198	<b><u>445</u></b>	<b><u>199</u></b>
471.omnetpp	4	287	87.2	285	87.7	<b><u>286</u></b>	<b><u>87.4</u></b>	4	<b><u>277</u></b>	<b><u>90.2</u></b>	277	90.1	276	90.5
473.astar	4	<b><u>323</u></b>	<b><u>86.9</u></b>	323	86.9	324	86.6	4	<b><u>323</u></b>	<b><u>86.9</u></b>	323	86.9	324	86.6
483.xalancbmk	4	<b><u>144</u></b>	<b><u>192</u></b>	145	191	144	192	4	<b><u>144</u></b>	<b><u>192</u></b>	145	191	144	192

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration: default

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 161**

**CELSIUS C740, Intel Xeon E5-1603 v3, 2.8 GHz**

**SPECint\_rate\_base2006 = 156**

**CPU2006 license:** 19

**Test date:** May-2015

**Test sponsor:** Fujitsu

**Hardware Availability:** May-2015

**Tested by:** Fujitsu

**Software Availability:** Sep-2014

## Base Compiler Invocation

C benchmarks:

`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks:

`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 161**

**CELSIUS C740, Intel Xeon E5-1603 v3, 2.8 GHz**

**SPECint\_rate\_base2006 = 156**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes  
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 161

CELSIUS C740, Intel Xeon E5-1603 v3, 2.8 GHz

SPECint\_rate\_base2006 = 156

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 30 16:16:57 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 June 2015.