



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint®_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

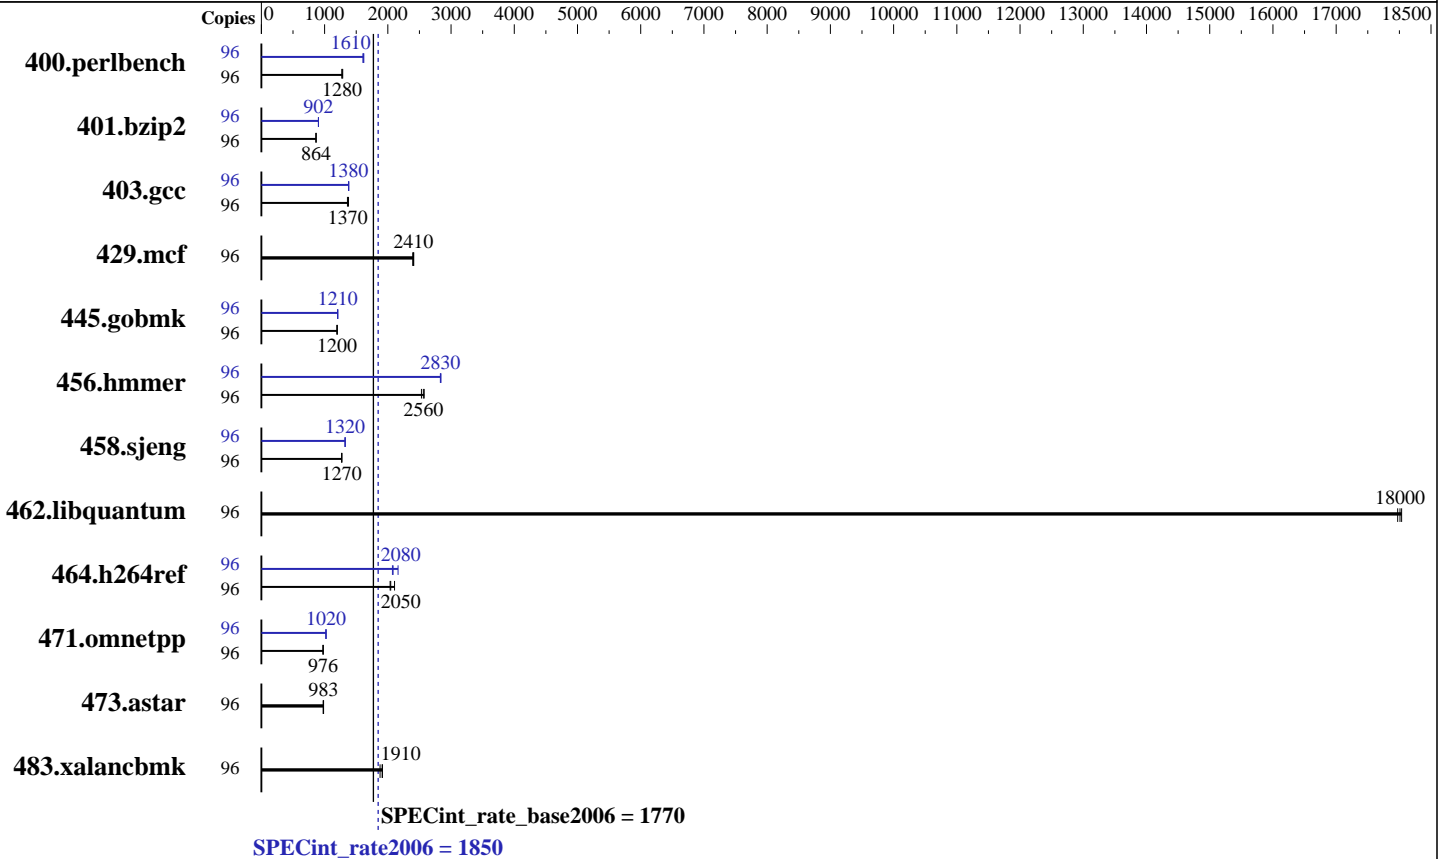

Hardware

CPU Name: Intel Xeon E5-4650 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 600 GB SATA III, SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12, Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	96	736	1270	<u>735</u>	<u>1280</u>	729	1290	96	579	1620	<u>582</u>	<u>1610</u>	584	1610
401.bzip2	96	1071	865	<u>1072</u>	<u>864</u>	1072	864	96	<u>1027</u>	<u>902</u>	1027	902	1025	903
403.gcc	96	<u>565</u>	<u>1370</u>	561	1380	568	1360	96	561	1380	559	1380	<u>560</u>	<u>1380</u>
429.mcf	96	<u>364</u>	<u>2410</u>	363	2410	366	2390	96	<u>364</u>	<u>2410</u>	363	2410	366	2390
445.gobmk	96	839	1200	<u>840</u>	<u>1200</u>	843	1190	96	833	1210	835	1210	<u>835</u>	<u>1210</u>
456.hammer	96	348	2580	<u>350</u>	<u>2560</u>	354	2530	96	316	2830	315	2840	<u>316</u>	<u>2830</u>
458.sjeng	96	<u>914</u>	<u>1270</u>	914	1270	914	1270	96	877	1320	<u>877</u>	<u>1320</u>	877	1330
462.libquantum	96	110	18000	111	18000	<u>110</u>	<u>18000</u>	96	110	18000	111	18000	<u>110</u>	<u>18000</u>
464.h264ref	96	1009	2110	1043	2040	<u>1038</u>	<u>2050</u>	96	<u>1020</u>	<u>2080</u>	1025	2070	983	2160
471.omnetpp	96	615	975	613	978	<u>615</u>	<u>976</u>	96	586	1020	589	1020	<u>586</u>	<u>1020</u>
473.astar	96	685	983	690	977	<u>686</u>	<u>983</u>	96	685	983	690	977	<u>686</u>	<u>983</u>
483.xalancbmk	96	<u>347</u>	<u>1910</u>	353	1880	346	1920	96	<u>347</u>	<u>1910</u>	353	1880	346	1920

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
COD Enable = Enable
Early Snoop = Disable
Enforce POR = Disabled
Sysinfo program /home/SPEC2K6/SPEC2006-V12/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on 18-216 Thu Jun 11 14:13:07 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 v3 @ 2.10GHz
4 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      529330024 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux 18-216 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Jun 11 14:08
```

```
SPEC is set to: /home/SPEC2K6/SPEC2006-V12
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  529G  7.5G  520G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.00 05/28/2015
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes (Continued)

Memory:

16x NO DIMM NO DIMM
7x Samsung(data:13/51) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
3x Samsung(data:14/16) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
8x Samsung(data:14/17) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
6x Samsung(data:14/25) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
8x Samsung(data:14/26) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Base Optimization Flags (Continued)

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 6



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4650 v3)

SPECint_rate2006 = 1850

SPECint_rate_base2006 = 1770

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 7 11:38:53 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 July 2015.