



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp<sup>®</sup>\_rate2006 = 1160

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

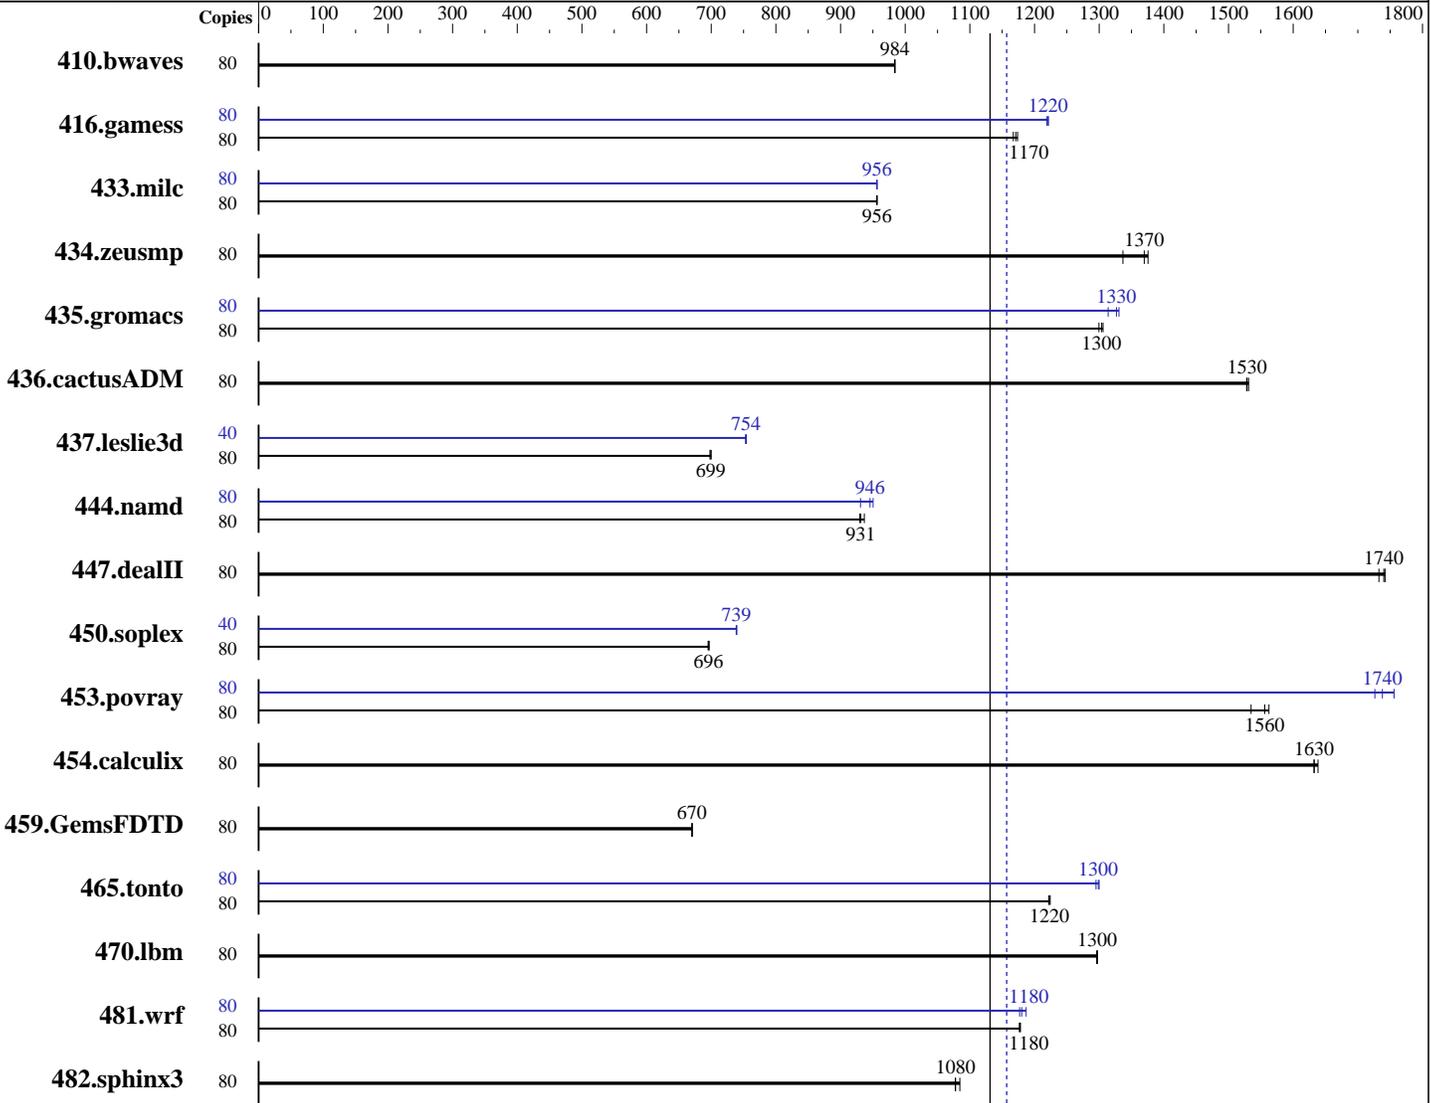

SPECfp\_rate\_base2006 = 1130

SPECfp\_rate2006 = 1160

### Hardware

CPU Name: Intel Xeon E5-4620 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64)  
 Kernel 3.12.28-4-default  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 1160

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jun-2015  
Hardware Availability: Jun-2015  
Software Availability: Oct-2014

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1105	984	<b><u>1105</u></b>	<b><u>984</u></b>	1105	984	80	1105	984	<b><u>1105</u></b>	<b><u>984</u></b>	1105	984
416.gamess	80	1334	1170	1342	1170	<b><u>1338</u></b>	<b><u>1170</u></b>	80	1285	1220	1282	1220	<b><u>1283</u></b>	<b><u>1220</u></b>
433.milc	80	768	956	768	956	<b><u>768</u></b>	<b><u>956</u></b>	80	<b><u>768</u></b>	<b><u>956</u></b>	768	956	768	956
434.zeusmp	80	545	1340	<b><u>532</u></b>	<b><u>1370</u></b>	529	1380	80	545	1340	<b><u>532</u></b>	<b><u>1370</u></b>	529	1380
435.gromacs	80	<b><u>438</u></b>	<b><u>1300</u></b>	437	1310	440	1300	80	429	1330	<b><u>431</u></b>	<b><u>1330</u></b>	435	1310
436.cactusADM	80	<b><u>625</u></b>	<b><u>1530</u></b>	624	1530	626	1530	80	<b><u>625</u></b>	<b><u>1530</u></b>	624	1530	626	1530
437.leslie3d	80	<b><u>1075</u></b>	<b><u>699</u></b>	1077	698	1075	700	40	499	753	498	754	<b><u>499</u></b>	<b><u>754</u></b>
444.namd	80	685	937	690	930	<b><u>689</u></b>	<b><u>931</u></b>	80	<b><u>679</u></b>	<b><u>946</u></b>	675	950	689	931
447.dealII	80	525	1740	<b><u>526</u></b>	<b><u>1740</u></b>	528	1730	80	525	1740	<b><u>526</u></b>	<b><u>1740</u></b>	528	1730
450.soplex	80	<b><u>959</u></b>	<b><u>696</u></b>	957	697	960	695	40	<b><u>452</u></b>	<b><u>739</u></b>	451	740	452	739
453.povray	80	277	1530	272	1560	<b><u>274</u></b>	<b><u>1560</u></b>	80	<b><u>245</u></b>	<b><u>1740</u></b>	247	1730	242	1760
454.calculix	80	404	1630	<b><u>404</u></b>	<b><u>1630</u></b>	403	1640	80	404	1630	<b><u>404</u></b>	<b><u>1630</u></b>	403	1640
459.GemsFDTD	80	<b><u>1266</u></b>	<b><u>670</u></b>	1267	670	1266	671	80	<b><u>1266</u></b>	<b><u>670</u></b>	1267	670	1266	671
465.tonto	80	<b><u>644</u></b>	<b><u>1220</u></b>	643	1220	644	1220	80	608	1300	<b><u>606</u></b>	<b><u>1300</u></b>	606	1300
470.lbm	80	847	1300	848	1300	<b><u>848</u></b>	<b><u>1300</u></b>	80	847	1300	848	1300	<b><u>848</u></b>	<b><u>1300</u></b>
481.wrf	80	<b><u>759</u></b>	<b><u>1180</u></b>	759	1180	760	1180	80	753	1190	<b><u>757</u></b>	<b><u>1180</u></b>	759	1180
482.sphinx3	80	1438	1080	1447	1080	<b><u>1447</u></b>	<b><u>1080</u></b>	80	1438	1080	1447	1080	<b><u>1447</u></b>	<b><u>1080</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 1160

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp\_rate\_base2006 = 1130

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2015  
**Hardware Availability:** Jun-2015  
**Software Availability:** Oct-2014

### Platform Notes

#### BIOS Configuration:

HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode  
Minimum Processor Idle Power Core State set to C6 State  
Energy/Performance Bias set to Maximum Performance  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on dl560gen9jks Tue Jun 16 02:34:30 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

#### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-4620 v3 @ 2.00GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

#### From /proc/meminfo

```
MemTotal: 529307968 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

#### /usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12
```

#### From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp\_rate2006 = 1160

SPECfp\_rate\_base2006 = 1130

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2015  
**Hardware Availability:** Jun-2015  
**Software Availability:** Oct-2014

### Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux dl560gen9jks 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Jun 15 12:15
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G  6.1G  325G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP P85 03/05/2015
Memory:
24x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1866 MHz
16x UNKNOWN NOT AVAILABLE
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1866 MHz
```

(End of data from sysinfo program)  
Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:  
24x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1866 MHz  
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1866 MHz

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

### Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp\_rate2006 = 1160

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 3

Test date: Jun-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 1160**

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

**SPECfp\_rate\_base2006 = 1130**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2015  
**Hardware Availability:** Jun-2015  
**Software Availability:** Oct-2014

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 1160**

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

**SPECfp\_rate\_base2006 = 1130**

**CPU2006 license:** 3

**Test date:** Jun-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen9  
(2.00 GHz, Intel Xeon E5-4620 v3)

**SPECfp\_rate2006 = 1160**

**SPECfp\_rate\_base2006 = 1130**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 14 16:21:48 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 July 2015.