



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint®_rate2006 = 986

Inspur NF5270M4 (Intel Xeon E5-2687W v3)

SPECint_rate_base2006 = 948

CPU2006 license: 3358


Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

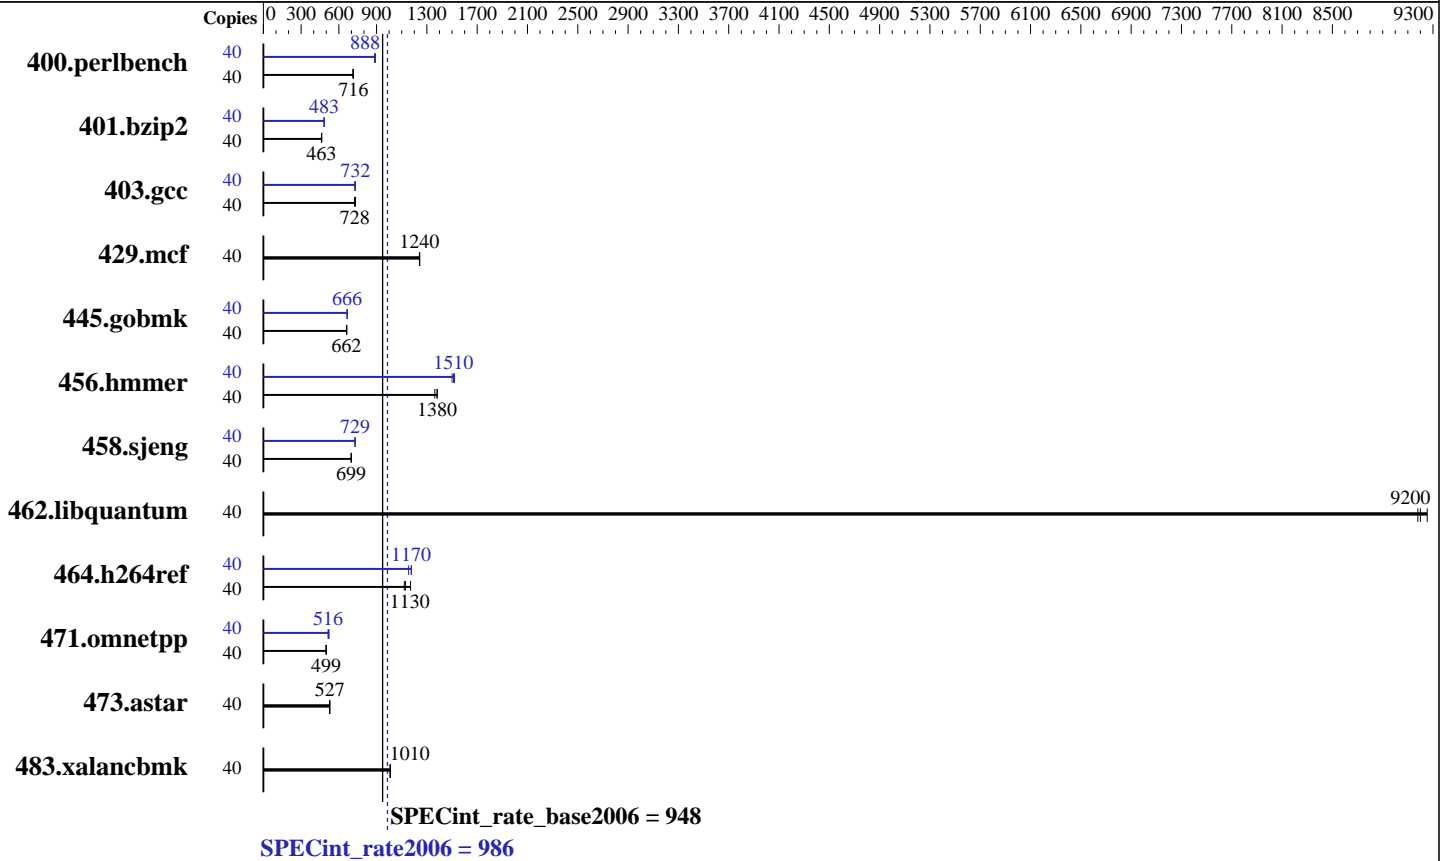

Hardware

CPU Name: Intel Xeon E5-2687W v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 450 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 5
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 986

Inspur NF5270M4 (Intel Xeon E5-2687W v3)

SPECint_rate_base2006 = 948

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	550	711	545	717	<u>546</u>	<u>716</u>	40	438	891	<u>440</u>	<u>888</u>	442	885
401.bzip2	40	<u>833</u>	<u>463</u>	833	463	833	463	40	797	484	<u>799</u>	<u>483</u>	800	483
403.gcc	40	444	725	440	733	<u>442</u>	<u>728</u>	40	<u>440</u>	<u>732</u>	444	726	440	732
429.mcf	40	294	1240	294	1240	<u>294</u>	<u>1240</u>	40	294	1240	294	1240	<u>294</u>	<u>1240</u>
445.gobmk	40	<u>634</u>	<u>662</u>	634	661	632	663	40	<u>630</u>	<u>666</u>	630	666	630	666
456.hammer	40	270	1380	<u>270</u>	<u>1380</u>	274	1360	40	249	1500	246	1520	<u>247</u>	<u>1510</u>
458.sjeng	40	694	698	<u>693</u>	<u>699</u>	692	699	40	664	729	<u>664</u>	<u>729</u>	663	730
462.libquantum	40	89.6	9250	<u>90.1</u>	<u>9200</u>	90.3	9180	40	89.6	9250	<u>90.1</u>	<u>9200</u>	90.3	9180
464.h264ref	40	790	1120	<u>784</u>	<u>1130</u>	756	1170	40	<u>753</u>	<u>1170</u>	752	1180	767	1150
471.omnetpp	40	502	498	<u>501</u>	<u>499</u>	499	501	40	485	515	478	523	<u>485</u>	<u>516</u>
473.astar	40	<u>532</u>	<u>527</u>	531	529	534	526	40	<u>532</u>	<u>527</u>	531	529	534	526
483.xalancbmk	40	273	1010	274	1010	<u>274</u>	<u>1010</u>	40	273	1010	274	1010	<u>274</u>	<u>1010</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS and OS configuration:
SCALING_GOVERNOR set to Performance
Hardware Prefetch set to Disable
Memory Frequency set to 2133 MHz
VT Support set to Disable
C1E Support set to Disable
Sysinfo program /home/CPU2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Jul 10 14:49:03 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2687W v3 @ 3.10GHz
2 "physical id"s (chips)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 986

Inspur NF5270M4 (Intel Xeon E5-2687W v3)

SPECint_rate_base2006 = 948

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Platform Notes (Continued)

40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB
```

From /proc/meminfo

```
MemTotal:      264037908 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Jul 10 14:27

SPEC is set to: /home/CPU2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   393G  68G  325G  18% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.0.1 10/30/2014

Memory:

```
8x NO DIMM NO DIMM
16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 986

Inspur NF5270M4 (Intel Xeon E5-2687W v3)

SPECint_rate_base2006 = 948

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 986

Inspur NF5270M4 (Intel Xeon E5-2687W v3)

SPECint_rate_base2006 = 948

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 986

Inspur NF5270M4 (Intel Xeon E5-2687W v3)

SPECint_rate_base2006 = 948

CPU2006 license: 3358

Test date: Jul-2015

Test sponsor: Inspur Corporation

Hardware Availability: Oct-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 29 12:08:33 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 July 2015.