



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

**Test date:** Jun-2015

**Hardware Availability:** Jul-2015

**Software Availability:** Oct-2014

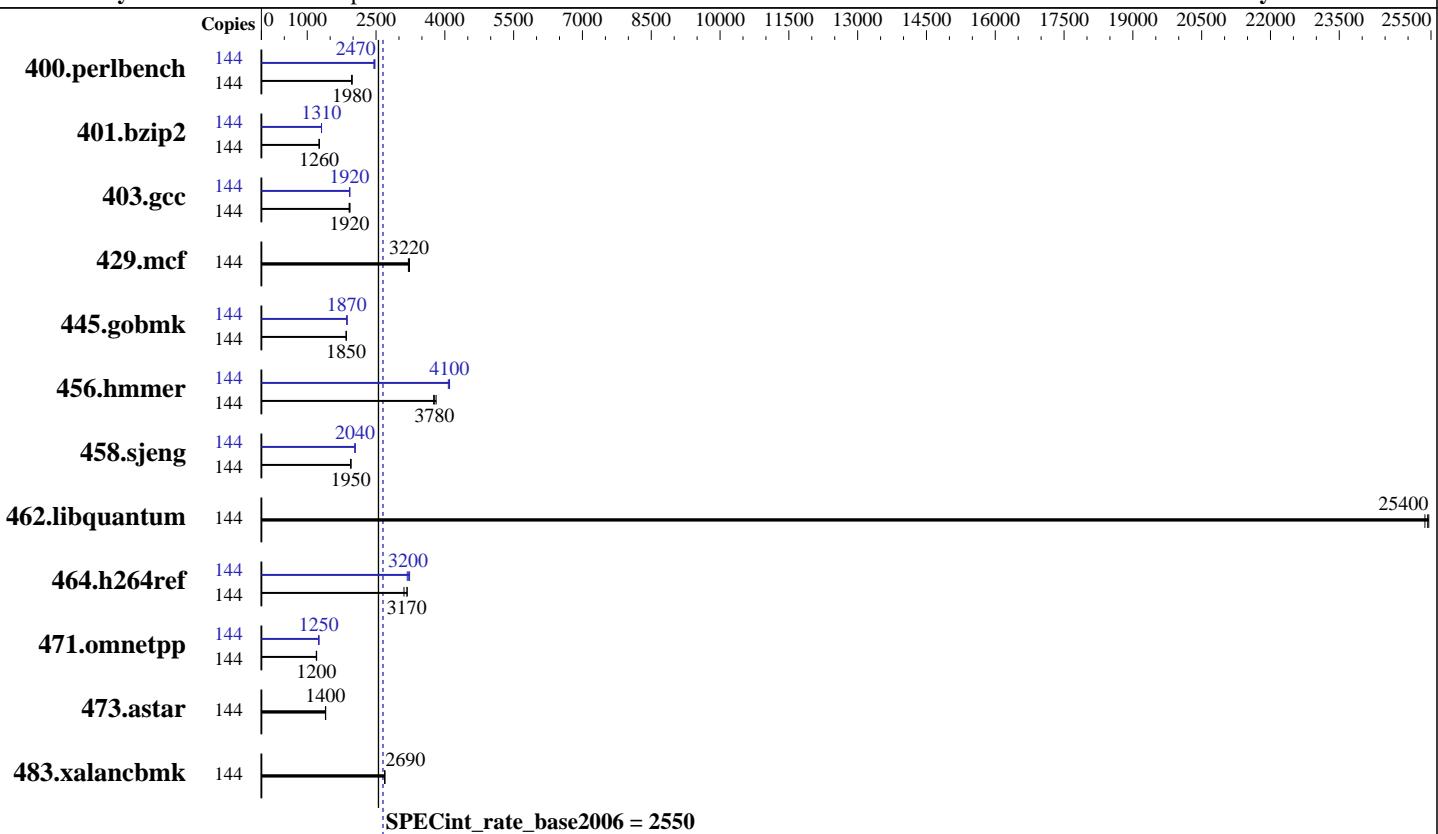

### Hardware

CPU Name: Intel Xeon E7-8870 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
Disk Subsystem: 1 x 400 GB SSD  
Other Hardware: None

### Software

Operating System: SUSE Linus Enterprise Server 12 (x86\_64) 3.12.28-4-default  
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	<b>712</b>	<b>1980</b>	711	1980	716	1970	144	574	2450	569	2470	<b>570</b>	<b>2470</b>
401.bzip2	144	1104	1260	1101	1260	<b>1101</b>	<b>1260</b>	144	<b>1060</b>	<b>1310</b>	1060	1310	1060	1310
403.gcc	144	600	1930	605	1920	<b>604</b>	<b>1920</b>	144	<b>603</b>	<b>1920</b>	603	1920	601	1930
429.mcf	144	410	3210	407	3230	<b>408</b>	<b>3220</b>	144	410	3210	407	3230	<b>408</b>	<b>3220</b>
445.gobmk	144	816	1850	817	1850	<b>816</b>	<b>1850</b>	144	809	1870	810	1870	<b>810</b>	<b>1870</b>
456.hmmer	144	353	3810	358	3760	<b>356</b>	<b>3780</b>	144	327	4100	<b>328</b>	<b>4100</b>	330	4080
458.sjeng	144	894	1950	893	1950	<b>893</b>	<b>1950</b>	144	853	2040	<b>853</b>	<b>2040</b>	854	2040
462.libquantum	144	117	25500	<b>117</b>	<b>25400</b>	118	25400	144	117	25500	<b>117</b>	<b>25400</b>	118	25400
464.h264ref	144	1025	3110	<b>1004</b>	<b>3170</b>	1003	3180	144	<b>995</b>	<b>3200</b>	986	3230	1002	3180
471.omnetpp	144	747	1210	<b>750</b>	<b>1200</b>	751	1200	144	<b>719</b>	<b>1250</b>	717	1250	721	1250
473.astar	144	724	1400	<b>722</b>	<b>1400</b>	722	1400	144	<b>724</b>	1400	<b>722</b>	<b>1400</b>	722	1400
483.xalancbmk	144	<b>369</b>	<b>2690</b>	369	2690	370	2690	144	<b>369</b>	<b>2690</b>	369	2690	370	2690

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Custom in BIOS

Cstates disabled in BIOS

Sysinfo program /home/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-w3yn Thu Jun 4 11:11:53 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8870 v3 @ 2.10GHz
        4 "physical id"s (chips)
        144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

## Platform Notes (Continued)

```
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

From /proc/meminfo
MemTotal:      1058522908 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
Linux linux-w3yn 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jun 4 11:08

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G  256G   76G  78% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[A9E121SUS-1.00]- 03/13/2015
Memory:
 64x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

## Platform Notes (Continued)

32x NO DIMM Unknown

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jun-2015

**Hardware Availability:** Jul-2015

**Software Availability:** Oct-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3850 X6  
(Intel Xeon E7-8870 v3, 2.10 GHz)

**SPECint\_rate2006 = 2650**

**SPECint\_rate\_base2006 = 2550**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Oct-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Aug 10 10:51:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 August 2015.