



SPEC[®] CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

SPECint[®]_rate2006 = Not Run

BladeSymphony BS520X (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 5400

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

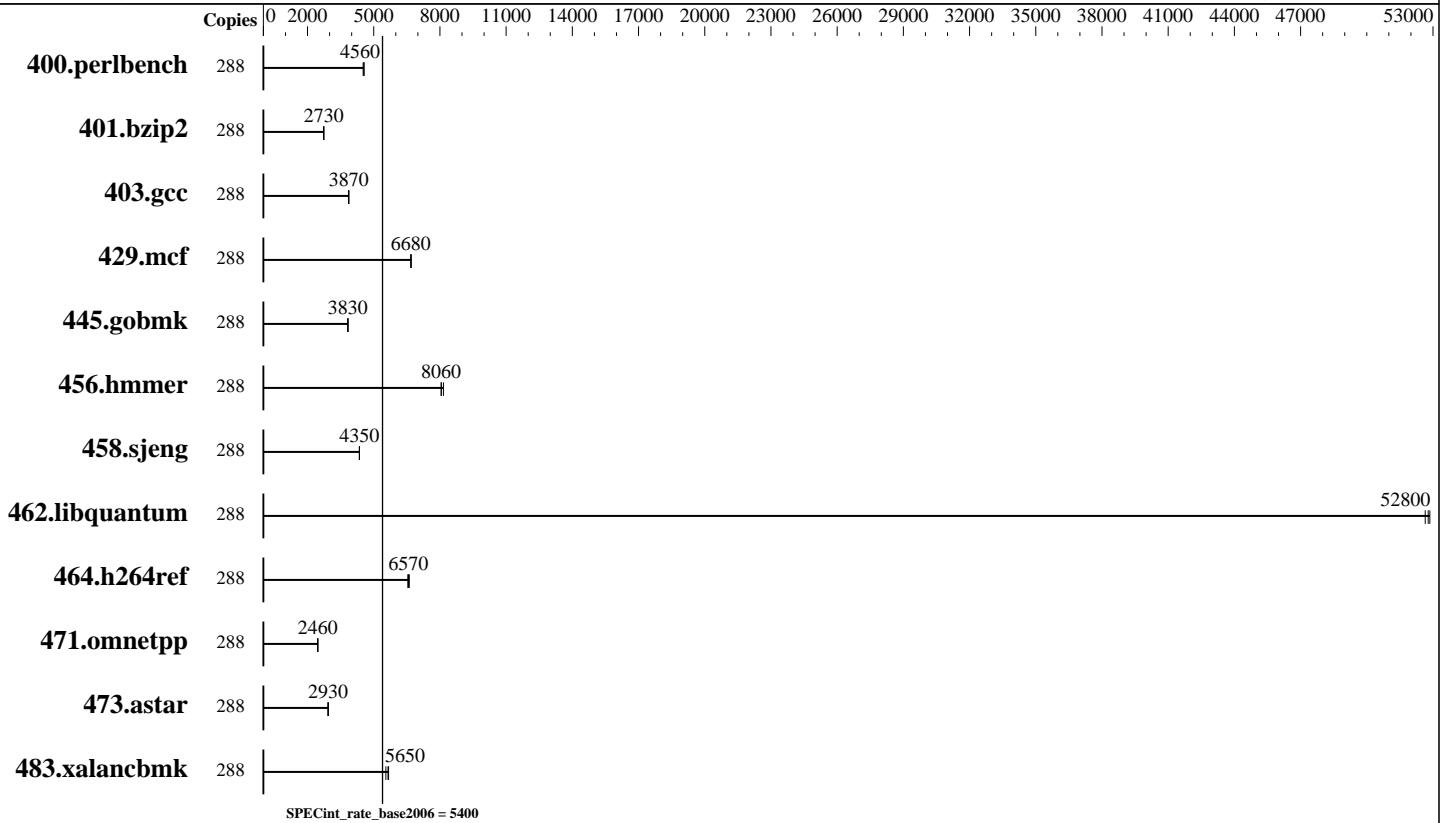

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4,8 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 2 x 300 GB SAS, 15000 RPM, RAID1
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 2.6.32-504.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = Not Run

BladeSymphony BS520X (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 5400

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Jul-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	288	622	4520	617	4560	617	4560							
401.bzip2	288	1017	2730	1016	2730	1014	2740							
403.gcc	288	601	3860	599	3870	599	3870							
429.mcf	288	392	6700	393	6680	393	6680							
445.gobmk	288	790	3830	788	3830	788	3830							
456.hmmer	288	329	8160	334	8060	333	8060							
458.sjeng	288	800	4360	801	4350	801	4350							
462.libquantum	288	113	52800	113	52600	113	52900							
464.h264ref	288	974	6550	964	6610	969	6570							
471.omnetpp	288	728	2470	732	2460	731	2460							
473.astar	288	687	2940	690	2930	689	2930							
483.xalancbmk	288	350	5670	352	5650	358	5550							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

C-State = Disable
C1 Enhanced Mode = Disable
EnergyEfficientTurbo = Disable
ProcessorPerformanceStates = Disable
UncoreFrequencyScaling = Disable
Platform Controlled Type = Maximum Performance
Memory Power Management = Disable
Patrol Scrub = Disable

Sysinfo program /home/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Jul 14 00:27:45 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = Not Run

BladeSymphony BS520X (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 5400

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
 8 "physical id"s (chips)
288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

From /proc/meminfo
MemTotal:      2117096220 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.6 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-504.el6.x86_64 #1 SMP Tue Sep 16 01:56:35
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 13 12:34

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_rhel6-lv_home
                ext4  221G  3.7G  206G   2% /home

Additional information from dmidecode:
BIOS HITACHI 09-14 07/09/2015
Memory:
64x NO DIMM Unknown
1x Samsung M39.A2G40DB0-CPB 16 GB 1600 MHz 2 rank
127x Samsung M393A2G40DB0-CPB 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = Not Run

BladeSymphony BS520X (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 5400

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

BladeSymphony BS520X, BladeSymphony BS2500 and Hitachi Compute Blade 520X are electronically equivalent.

The results have been measured on a Hitachi Compute Blade 520X.

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = Not Run

BladeSymphony BS520X (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 5400

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.20150729.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.20150729.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 29 12:11:23 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 July 2015.